


Notes:

1. Pin: Lead-free C6801, plating 3u" Min Au over 60~100u" Ni ;
Housing: Black HTN+30%GF UL94 V-0;
nut: Brass \varnothing M2.50
2. Electrical:
Voltage: 24.0 V.
Current: 5.0A Max .
3. Surface deburring treatment, surface roughness Ra0.4;
4. Materials and coatings comply with ROHS and REACH standards;
5. Salt spray test for 48 hours;
6. The dimensions marked with an asterisk are critical.

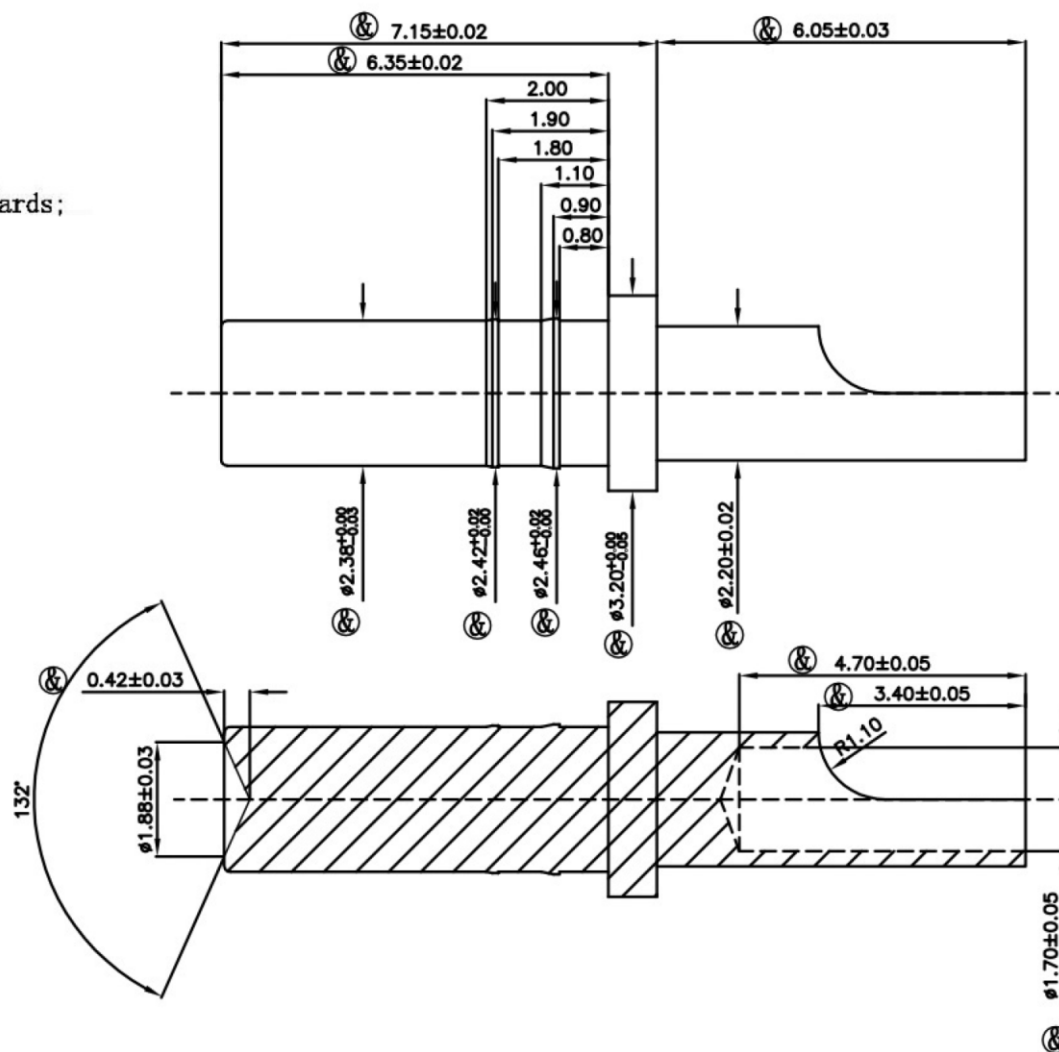

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PGS-S-023132-LF
SERIES LEADFREE
TOTAL LONG 13.2mm
2.38 \varnothing
SOLDER

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: