Notes:

1. pin: lead-free copper C6801, surface plated with nickel 100u" and gold plating 3u" minimum;
2. Surface deburring treatment, surface roughness Ra0.4;
3. Materials and coatings comply with ROHS and REACH standards;
4. Salt spray test for 48 hours;
5. The dimensions marked with an asterisk are critical.

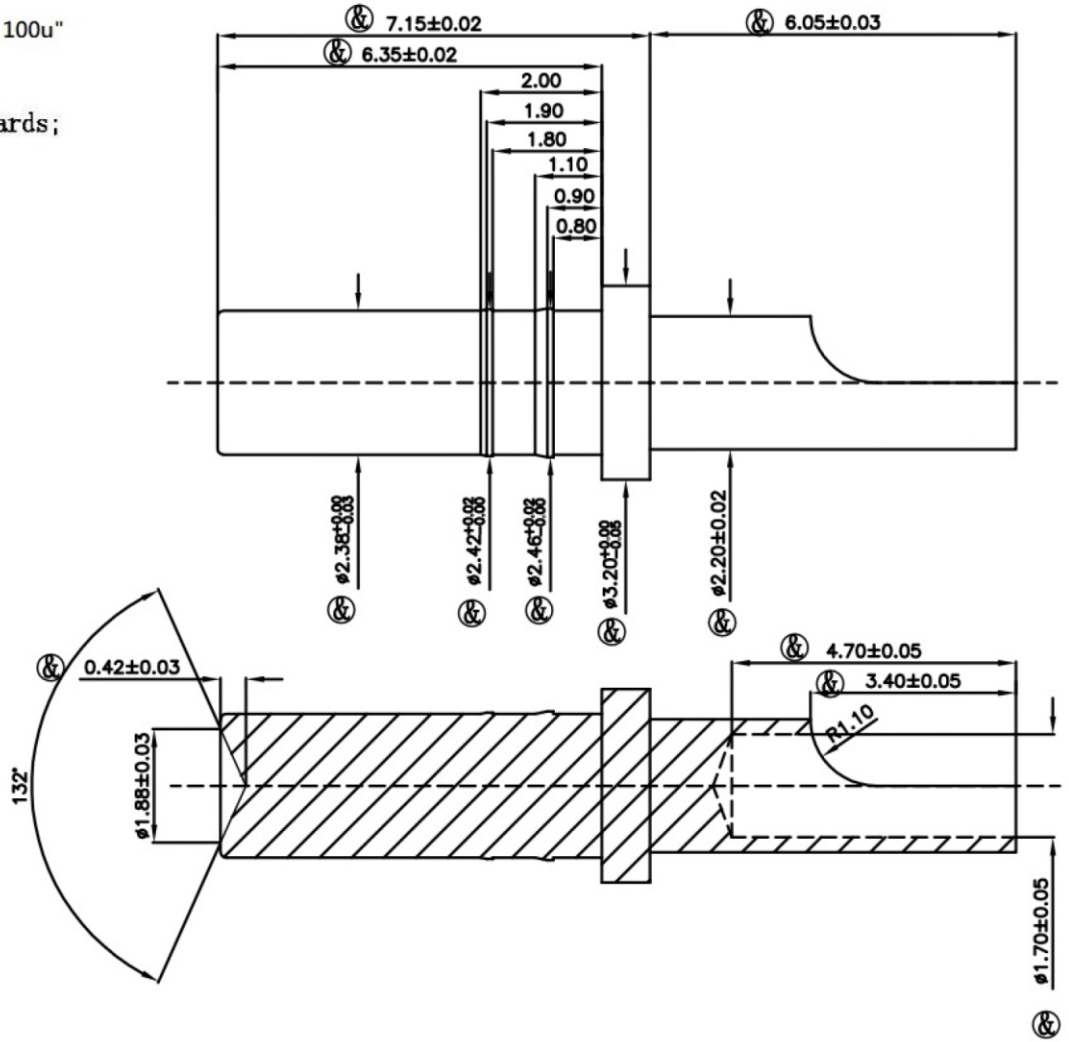

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ± 0.20
DATE		.XX ± 0.10
SIZE A4	PPOJECTION	.XXX ± 0.05
		ANG ±

照片框

ORDER INFORMATION

PGS-S-023132-LF
SERIES
SOLDER
2.38 Ø
TOTAL LONG 13.2mm
LEADFREE

DESCRIPTION: