

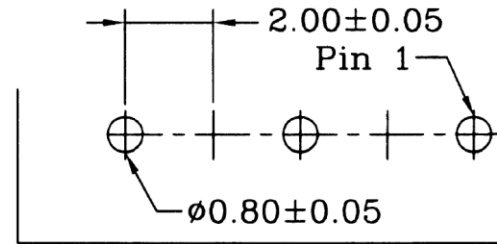
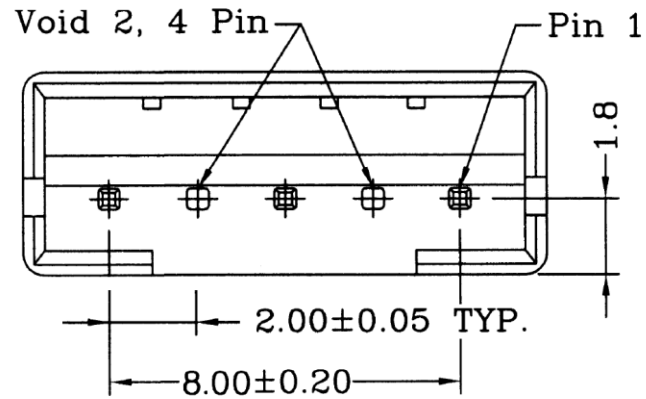


Material: \* Insulator: Nylon 66 UL 94V-0 (White)  
 \* Contact: Brass, Tin Plated.

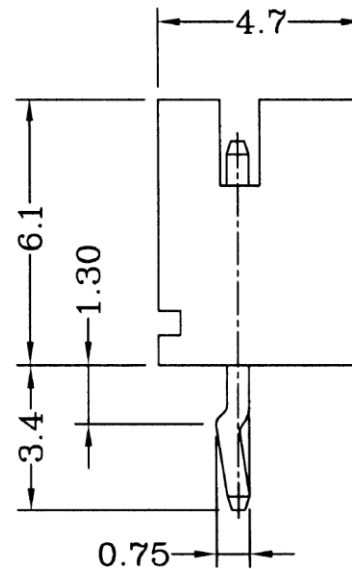

P.C.B LAYOUT

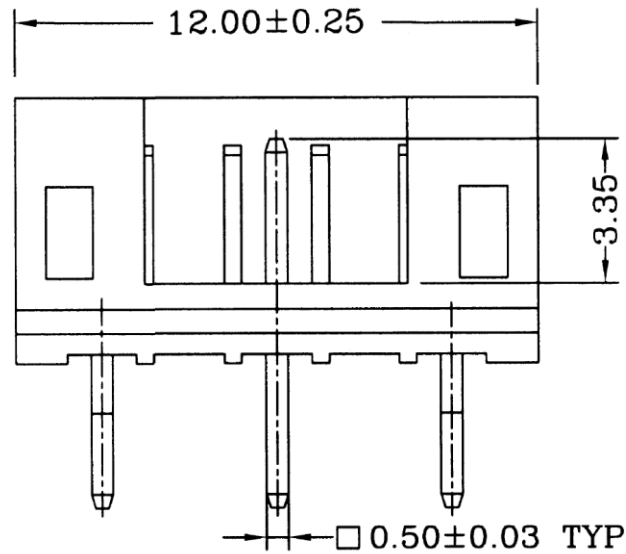

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±  
 .X ± 0.25  
 .XX ± 0.15  
 .XXX ± 0.08  
 ANG ±

照片框

ORDER INFORMATION

PH-DEE-03-LF  
 SERIES | LEADFREE  
 | 03 WAY  
 | EMPTY EVEN  
 | DIP180°

DESCRIPTION: