

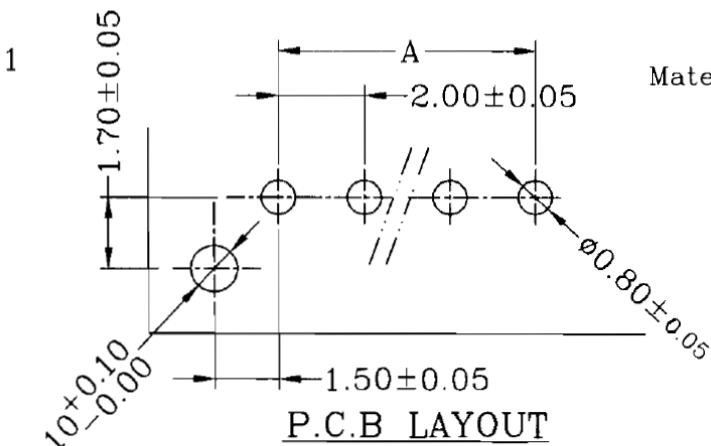
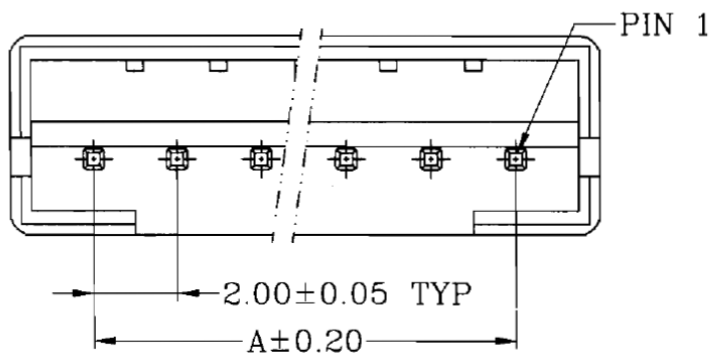


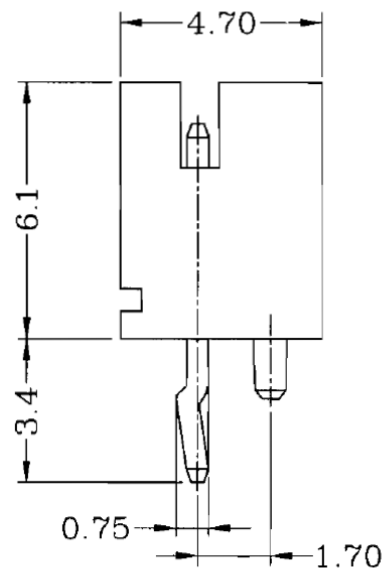

Material: *Insulator: Nylon 66 UL 94V-0 (White)
*Contact: Brass, Tin plated

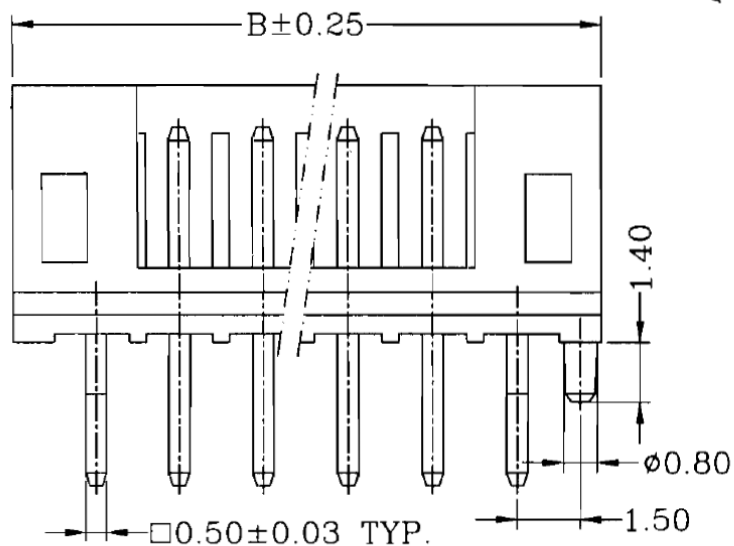

Dimensional & Ordering Information:

Circuits	Dimensions		PCS/BAG
	A	B	
2	—	6.00	1000
3	4.00	8.00	1000
4	6.00	10.00	1000
5	8.00	12.00	1000
6	10.00	14.00	1000
7	12.00	16.00	500
8	14.00	18.00	500
9	16.00	20.00	500
10	18.00	22.00	500
11	20.00	24.00	500
12	22.00	26.00	500
13	24.00	28.00	500
14	26.00	30.00	500
15	28.00	32.00	500
16	30.00	34.00	500

12P以上(包含12P)偶數打四處K(中間兩支PIN及頭尾PIN),奇數打三處K(中間一支PIN及頭尾PIN).

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

PH-DP-xx-LF
SERIES | T | LEADFREE
02~16 WAY
POST
DIP 180°

DESCRIPTION: