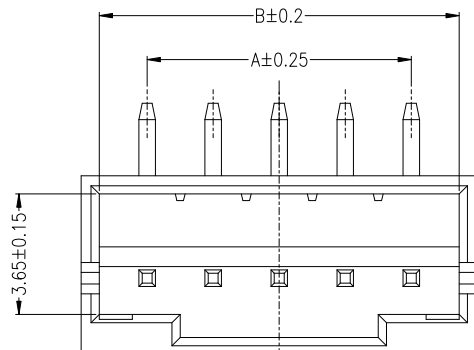


RECOMMENDED PCB LAYOUT(TOP VIEW)
TOLERANCE:±0.05mm

Specifications:

Contact resistance:≤20mΩ

Insulation resistance:≥1000MΩ

Rated voltage:250V AC DC





Rated current:2.0A AC DC

Withstand voltage:1000V AC/minute

Temperature range:-25℃~ +105℃

Housing:LCP UL94V-0,Natural

Contacts:Brass/Sn-plated

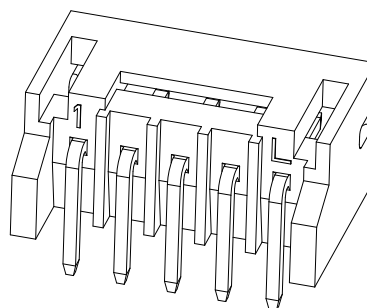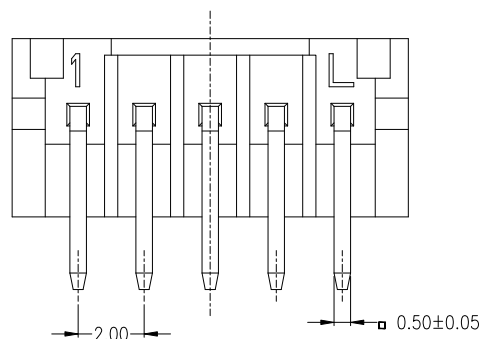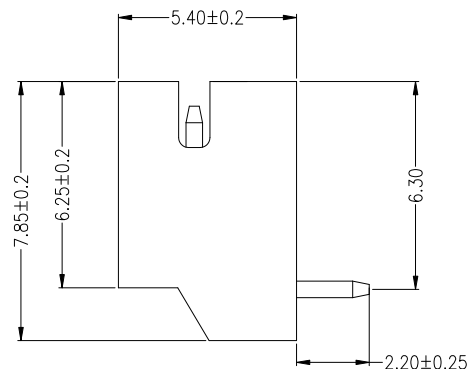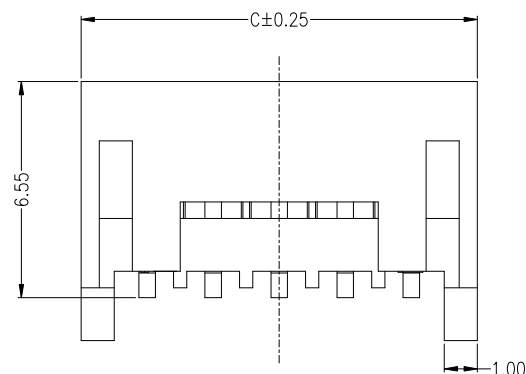

Circuits	Dimensions (mm)		
	A	B	C
02	2.00	4.90	6.00
03	4.00	6.90	8.00
04	6.00	8.90	10.00
05	8.00	10.90	12.00
06	10.00	12.90	14.00
07	12.00	14.90	16.00
08	14.00	16.90	18.00
09	16.00	18.90	20.00
10	18.00	20.90	22.00
11	20.00	22.90	24.00
12	22.00	24.90	26.00
13	24.00	26.90	28.00
14	26.00	28.90	30.00
15	28.00	30.90	32.00
16	30.00	32.90	34.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50


.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ±





PPOJECTION




ORDER INFORMATION

PH-RR-xx-LF
SERIES | REEL | LEADFREE
02~16WAY
DIP 90°

DESCRIPTION:

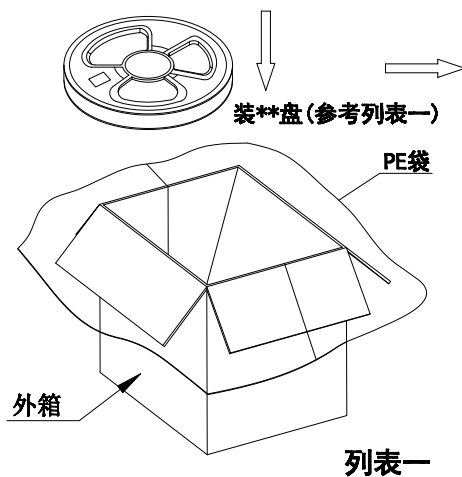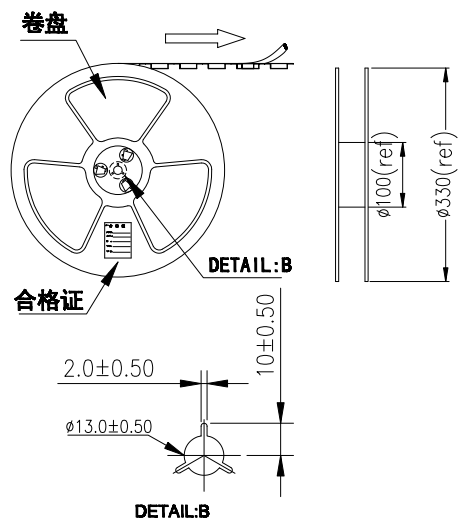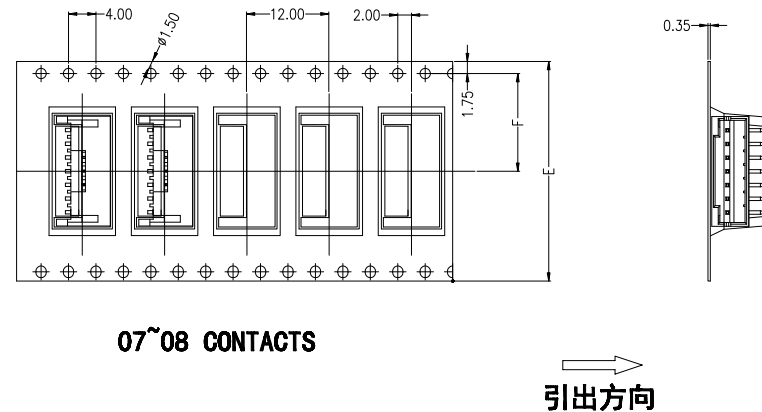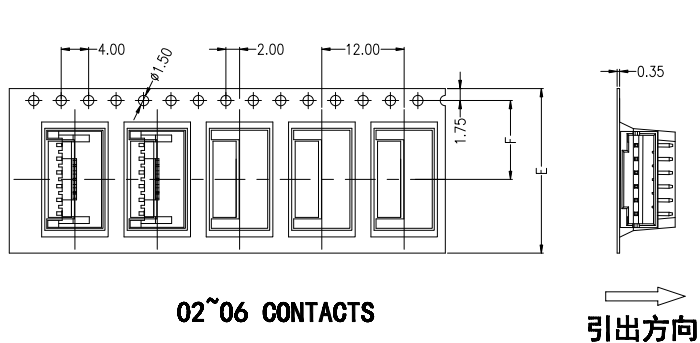

Circuits	DIM. E	DIM. F	Q'ty/Reel	Packing (Reel/Caton)
02~03PIN	16.00	7.50	600PCS	20/Reel
04~06PIN	24.00	11.50	600PCS	15/Reel
07~08PIN	32.00	14.25	600PCS	11/Reel

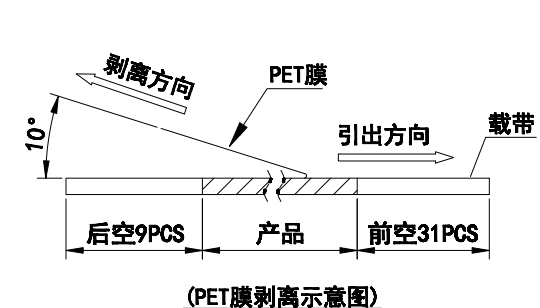

包装说明:

- 把成品包入卷盘中, 每盘装600PCS, 卷盘上贴上合格证, 将装好产品的卷盘放进外箱中, 外箱内先套一个大PE袋, 外箱上贴贴上合格证.
- 所有材料有害物控制需符合RoHS标准.

