

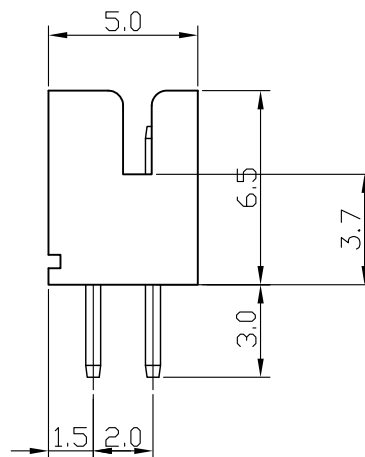


Specification

Current Rating: 2A AC DC
 Voltage Rating: 250V AC, DC
 Operating Temp: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Withstanding Voltage: 800V AC/minute
 Insulation Resistance: 1000MΩ Min
 Pin Material: Brass/ Gold 15u" over 50u" Nickel
 Body Material: Nylon 66, UL 94V-0+GF

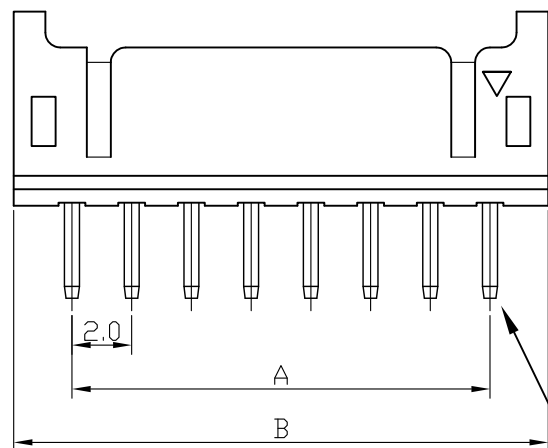

Circuit No.1

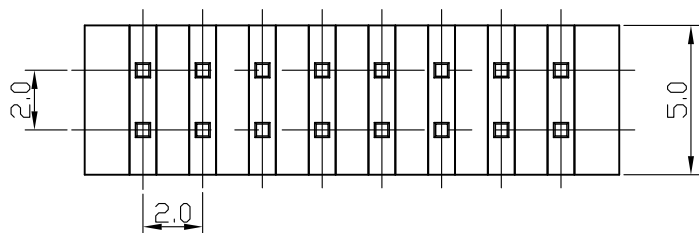

Ordering Information & Dimensions

Poles	Dimension (mm)		Part No.	Note.
	A	B		
2x2	2.0	6.0	PHD-DG15-04	
2x3	4.0	8.0	PHD-DG15-06	
2x4	6.0	10.0	PHD-DG15-08	
2x5	8.0	12.0	PHD-DG15-10	
2x6	10.0	14.0	PHD-DG15-12	
2x7	12.0	16.0	PHD-DG15-14	
2x8	14.0	18.0	PHD-DG15-16	
2x9	16.0	20.0	PHD-DG15-18	
2x10	18.0	22.0	PHD-DG15-20	
2x11	20.0	24.0	PHD-DG15-22	
2x12	22.0	26.0	PHD-DG15-24	
2x13	24.0	28.0	PHD-DG15-26	
2x14	26.0	30.0	PHD-DG15-28	
2x15	28.0	32.0	PHD-DG15-30	
2x16	30.0	34.0	PHD-DG15-32	
2x17	32.0	36.0	PHD-DG15-34	
2x20	38.0	42.0	PHD-DG15-40	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PHD-DG15-xx-LF
 SERIES LEADFREE
 04~40WAY
 GOLD 15u"
 DIP 180°

DESCRIPTION: 2.0mm Wire-to-Board Header 180° Dual Row Type