

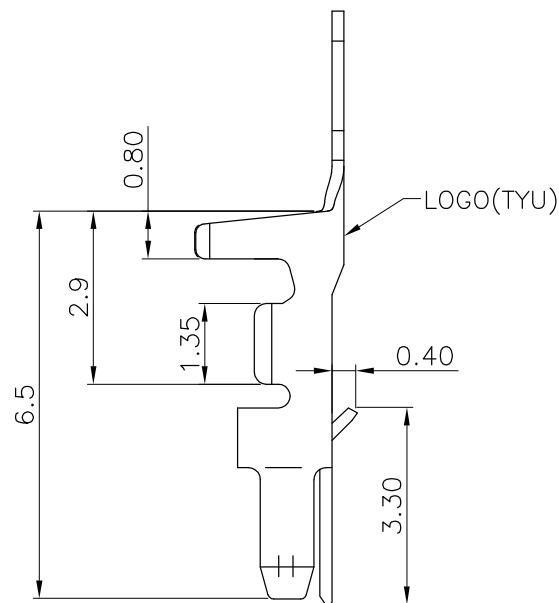
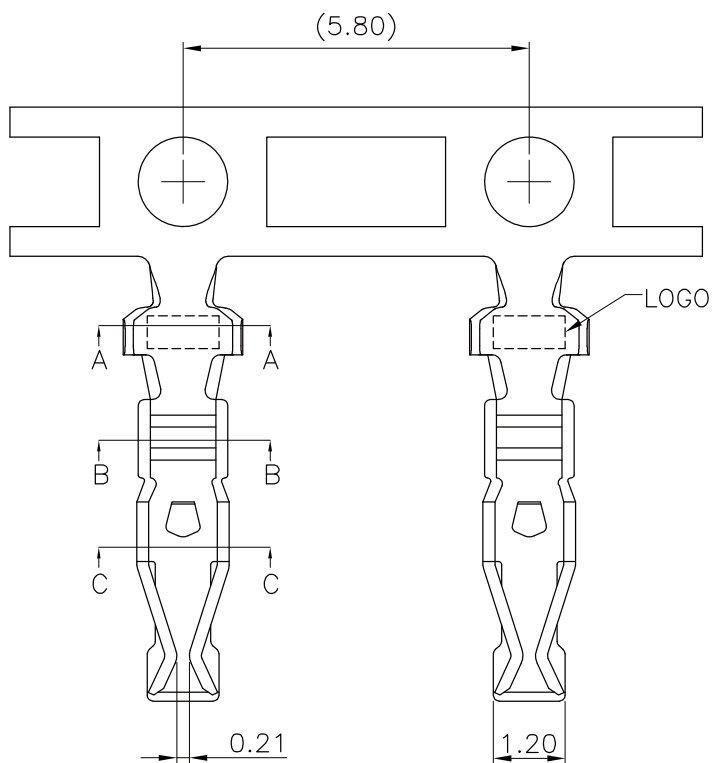


Section A-A



Section B-B



Section C-C

NOTES:

1. MATERIAL: PHOSPHOR BRONZE, $t=0.20\text{mm}$

CONTACT INFORMATION:

Part No.	Wire Range	Insulation O.D.	DIM.(mm)			
			A	B	C	D
PHD-T-22	AWG#22~#28	$\phi 0.90 \sim 1.50\text{mm}$	2.0	2.5	1.7	1.5
PHD-T-26	AWG#26~#30	$\phi 1.40\text{mm (MAX.)}$	1.8	1.8	1.4	1.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX $\pm$
ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

PHD-T-xx-LF
SERIES T LEADFREE
22:22~28WAY
26:26~30WAY
TERMINAL





DESCRIPTION: WIRE TO BOARD, PITCH 2.00mm, CRIMP TYPE, CONTACT

PCAKING MATERIAL

PART NAME	DIM(mm)
CARTON	580*580*210

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
PHD-T-xx	10,000	8	80,000

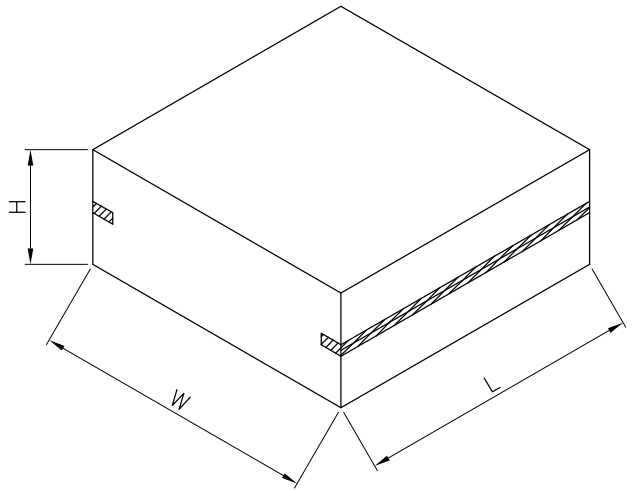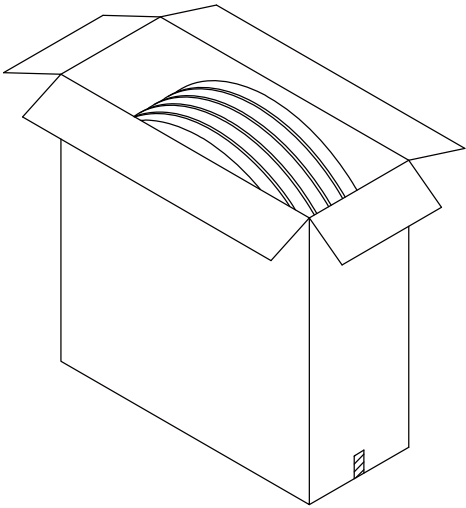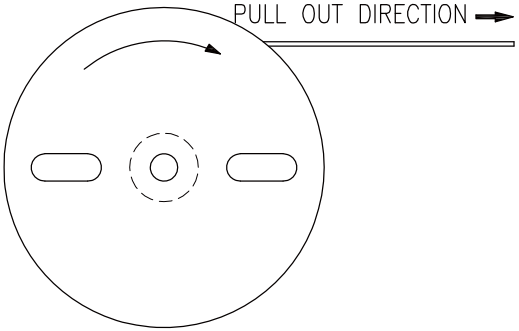

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PHD-T-xx-LF
SERIES T LEADFREE
22:22~28WAY
26:26~30WAY
TERMINAL

DESCRIPTION: WIRE TO BOARD, PITCH 2.00mm, CRIMP TYPE, CONTACT