

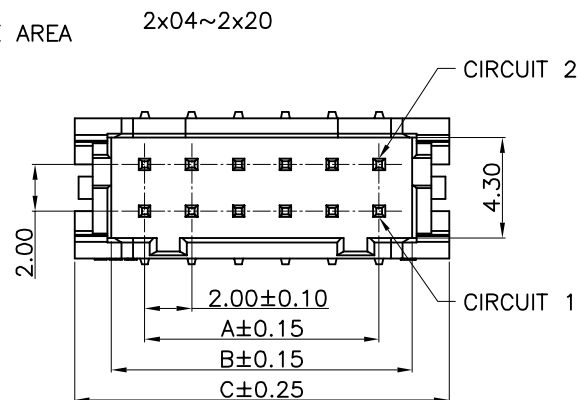
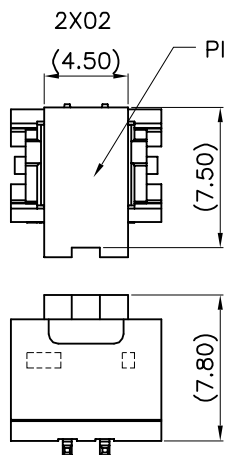

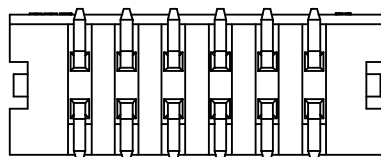



TOLERANCE: ± 0.05
RECOMMENDED P.C.B. Layout
TOP VIEW

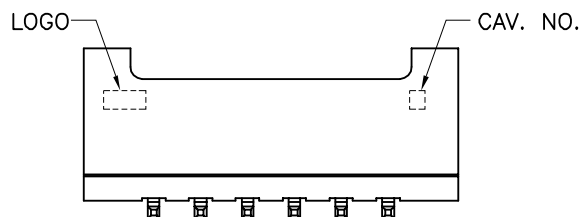

Mating Condition (REF.)

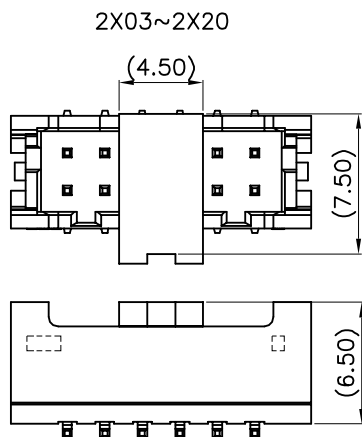

NOTES:
1. MATERIAL:
INSULATION(HALOGEN FREE): NYLON 4T, UL94V-0
COVER(HALOGEN FREE): NYLON 4T, UL94V-0
CONTACT: COPPER ALLOY, 0.50mm SQUARE PIN

PIN	DIM.(mm)			PIN	DIM.(mm)		
	A	B	C		A	B	C
2x02	--	4.84	8.00	2x12	22.00	24.84	28.00
2x03	4.00	6.84	10.00	2x13	24.00	26.84	30.00
2x04	6.00	8.84	12.00	2x14	26.00	28.84	32.00
2x05	8.00	10.84	14.00	2x15	28.00	30.84	34.00
2x06	10.00	12.84	16.00	2x16	30.00	32.84	36.00
2x07	12.00	14.84	18.00	2x17	32.00	34.84	38.00
2x08	14.00	16.84	20.00	2x18	34.00	36.84	40.00
2x09	16.00	18.84	22.00	2x19	36.00	38.84	42.00
2x10	18.00	20.84	24.00	2x20	38.00	40.84	44.00
2x11	20.00	22.84	26.00				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION


照片框

ORDER INFORMATION

PHDL-VXCR-xx-LF

SERIES
LEADFREE
04~40WAY
REEL
CAP
NON POST
180°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 2.00mm, VERTICAL, SMT TYPE, ASSEMBLY

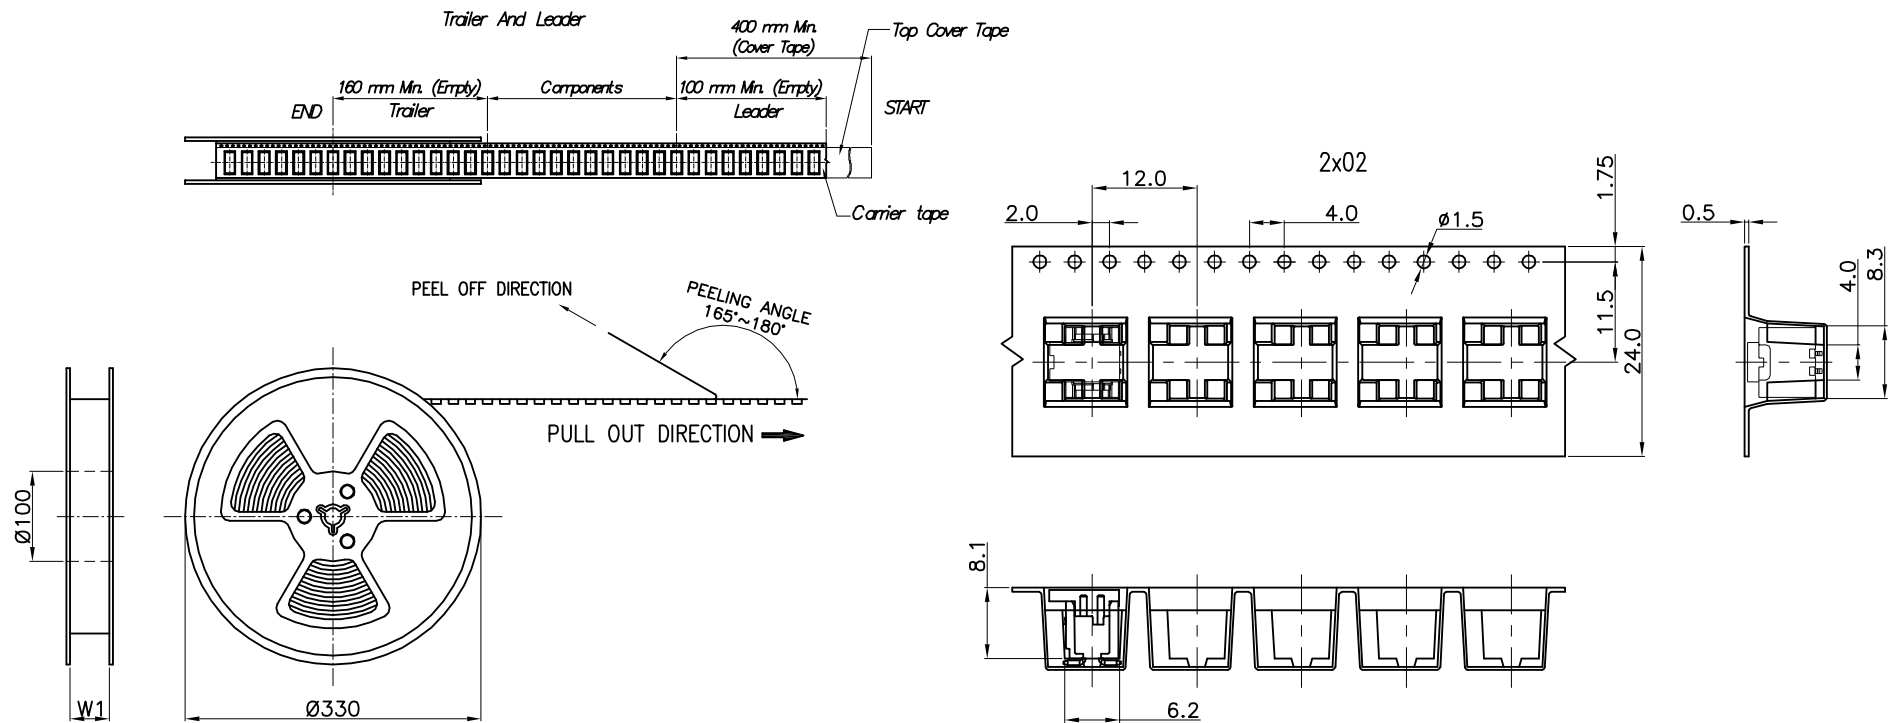

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm
3. THE TOTAL TEARING CONTROL RANGE OF TOP COVER TAPE IS 10~130g, REFERENCE SPEC: EIA-481-D
4. PEELING SPEED: 300mm/MINUTES, REFERENCE SPEC: EIA-481-D
5. MATERIAL: TRANSPARENT CONDUCTIVE POLYSTYRENE ALLOY.(UP-5000)
6. ALL DIMENSIONS MEET EIA-481-D REQUIREMENTS
7. THICKNESS : 0.50 ± 0.05 mm
8. COMPONENT LOAD PER 13" REEL : 500 PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX $\pm$
ANG $\pm 3^\circ$

PPOJECTION






照片框

ORDER INFORMATION

PHDL-VXCR-xx-LF

SERIES | | | | LEADFREE
04~40WAY
REEL
CAP
NON POST
180°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 2.00mm, VERTICAL, SMT TYPE, ASSEMBLY

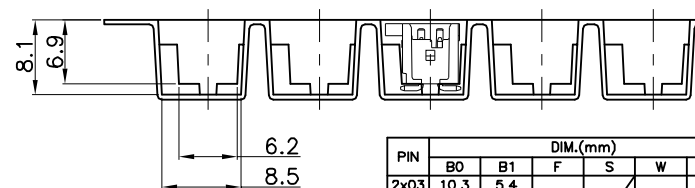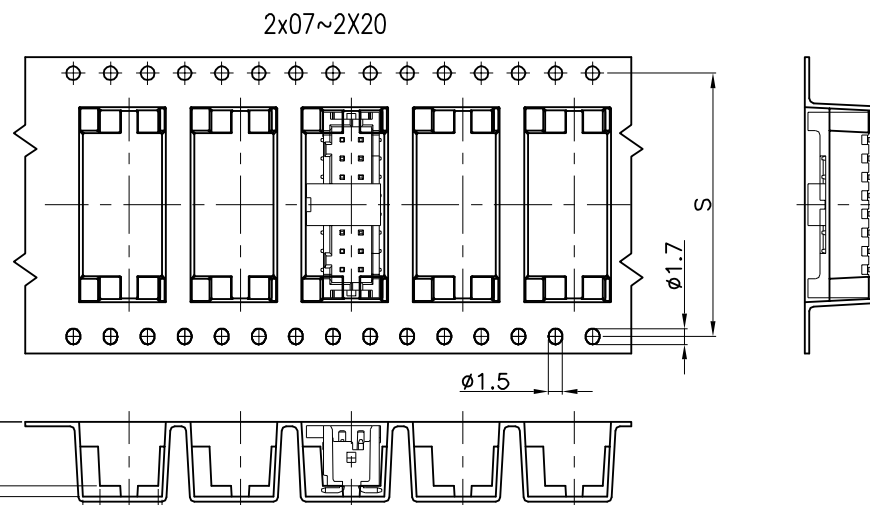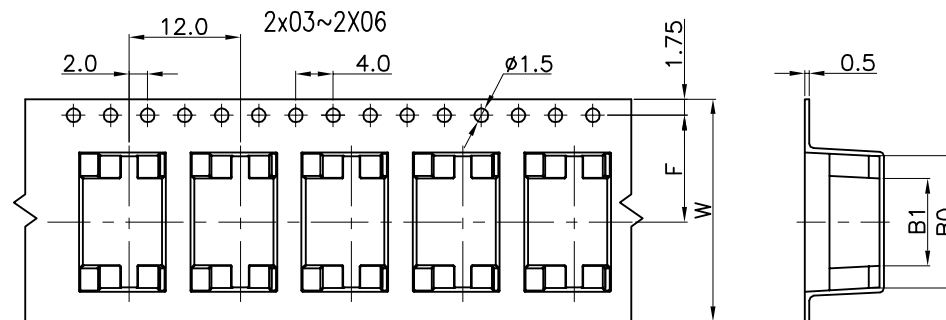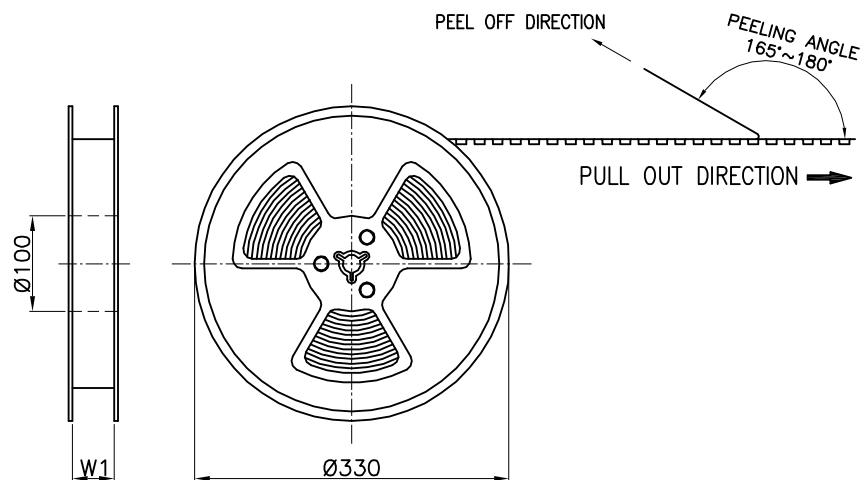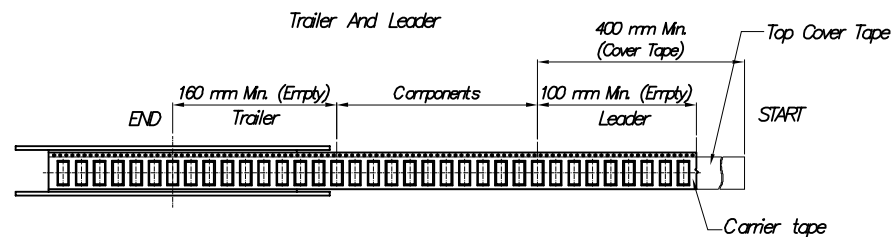

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm
3. THE TOTAL TEARING CONTROL RANGE OF TOP COVER TAPE IS 10~130g, REFERENCE SPEC: EIA-481-D
4. PEELING SPEED: 300mm/MINUTES, REFERENCE SPEC: EIA-481-D
5. MATERIAL: TRANSPARENT CONDUCTIVE POLYSTYRENE ALLOY.(UP-5000)
6. ALL DIMENSIONS MEET EIA-481-D REQUIREMENTS
7. THICKNESS : 0.50 ± 0.05 mm
8. COMPONENT LOAD PER 13" REEL : 500 PCS

PIN	DIM.(mm)						PIN	DIM.(mm)					
	B0	B1	F	S	W	W1		B0	B1	F	S	W	W1
2x03	10.3	5.4	11.5	24.0	24.5	24.5	2x12	28.3	23.4	20.2	40.4	44.0	44.5
2x04	12.3	7.4					2x13	30.3	25.4				
2x05	14.3	9.4					2x14	32.3	27.4				
2x06	16.3	11.4					2x15	34.3	29.4				
2x07	18.3	13.4	14.2	28.4	32.0	32.5	2x16	36.3	31.4	26.2	52.4	56.0	56.5
2x08	20.3	15.4					2x17	38.3	33.4				
2x09	22.3	17.4					2x18	40.3	35.4				
2x10	24.3	19.4					2x19	42.3	37.4				
2x11	26.3	21.4	20.2	40.4	44.0	44.5	2x20	44.3	39.4				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION


照片框

ORDER INFORMATION


PHDL-VXCR-xx-LF

SERIES
LEADFREE
04~40WAY
REEL
CAP
NON POST
180°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 2.00mm, VERTICAL, SMT TYPE, ASSEMBLY

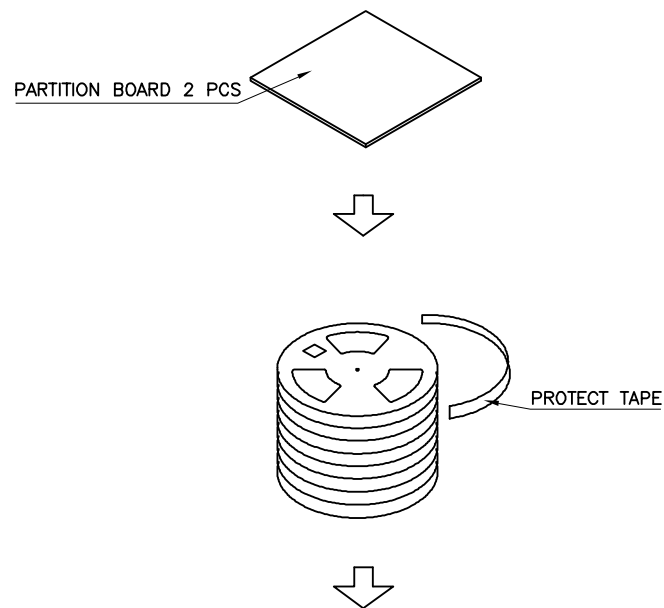

PACKING MATERIAL		PACKING CAPACITY			
PART NAME	DIM.(mm)	PIN	PCS/RE	RE/BC	PCS/BC
REEL	$\phi 330*(W+0.5)$	2x02~2x06	500	9	4,500
CARTON	350*350*340	2x07~2x09	500	7	3,500
		2x10~2x15	500	6	3,000
		2x16~2x20	500	4	2,000

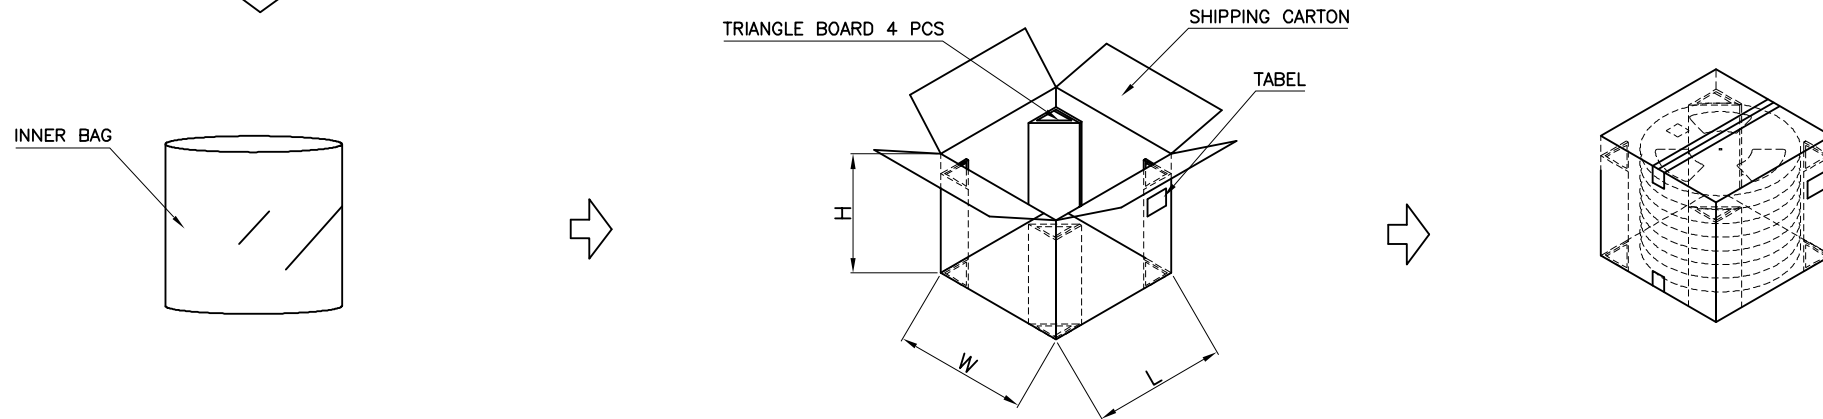

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PHDL-VXCR-xx-LF

SERIES LEADFREE
04~40WAY
REEL
CAP
NON POST
180°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 2.00mm, VERTICAL, SMT TYPE, ASSEMBLY