


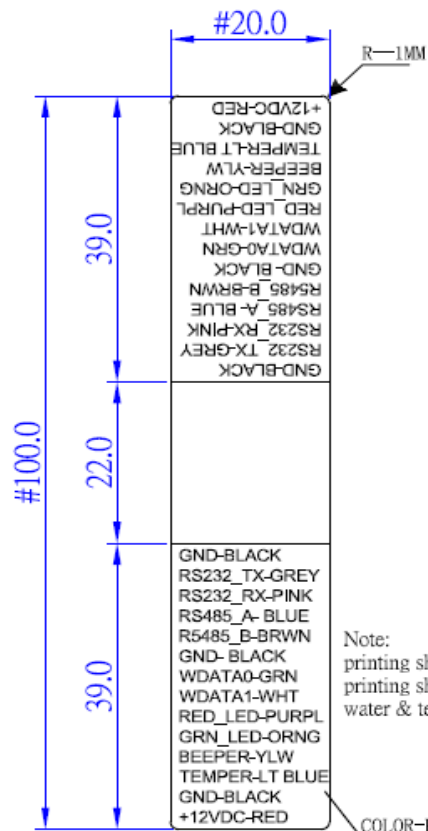


+12VDC-RED
GND-BLACK
TEMPER-LT BLUE
BEEPER-YLW
GRN_LED-ORNG
RED_LED-PURPL
WDATA1-WHT
WDATA0-GRN
GND-BLACK
RS485_A-BLUE
RS485_B-BRWN
RS232_RX-PINK
RS232_TX-GREY
GND-BLACK

GND-BLACK
RS232_TX-GREY
RS232_RX-PINK
RS485_A-BLUE
RS485_B-BRWN
GND-BLACK
WDATA0-GRN
WDATA1-WHT
RED_LED-PURPL
GRN_LED-ORNG
BEEPER-YLW
TEMPER-LT BLUE
GND-BLACK
+12VDC-RED

Note:
printing should not spread
printing should be sharp
water & tear resistant

COLOR-PANTONE BLACK C
TEXT-ARIAL NARROW
TEXT HEIGHT-1.8 MM

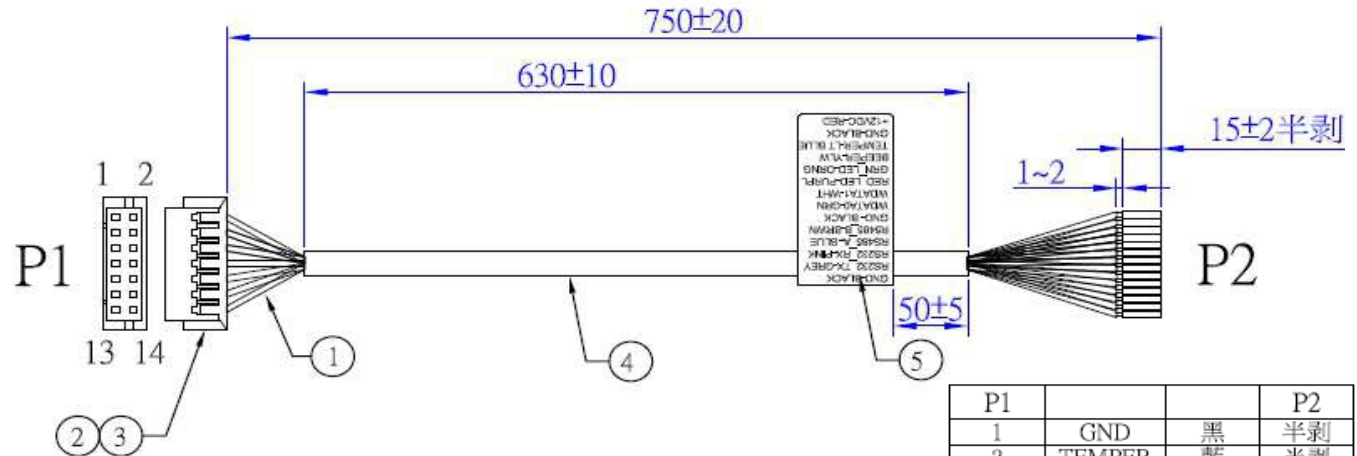

P1			P2
1	GND	黑	半剥
2	TEMPER	藍	半剥
3	RS232-TX	灰	半剥
4	BEEPER	黃	半剥
5	RS232-RX	紅	半剥
6	GRN-LED	橙	半剥
7	RS485-A	藍	半剥
8	RED-LED	紫	半剥
9	RS485-B	棕	半剥
10	WDATA0	綠	半剥
11	+12VDC	紅	半剥
12	WDATA1	白	半剥
13	GND	黑	半剥
14	GND	黑	半剥

序號	材料規格	用量
1	WIRE: UL1007 26# 黑*3 紅藍*2 棕橙黃綠紫灰白*1	14PCS
2	HOUSING: 12002H00-2*7P 2.0PITCH	1PCS
3	TERMINAL: 12002TOP-2-NK	14PCS
4	PVC管: Ø6 黑色	1PCS
5	标签:	1PCS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PHDX1-140026TB1-F75C-LF

SERIES

TUBE

26 AWG

14 WAY

LEADFREE

750mm

FEMALE

DESCRIPTION: WIRE HARNESS