


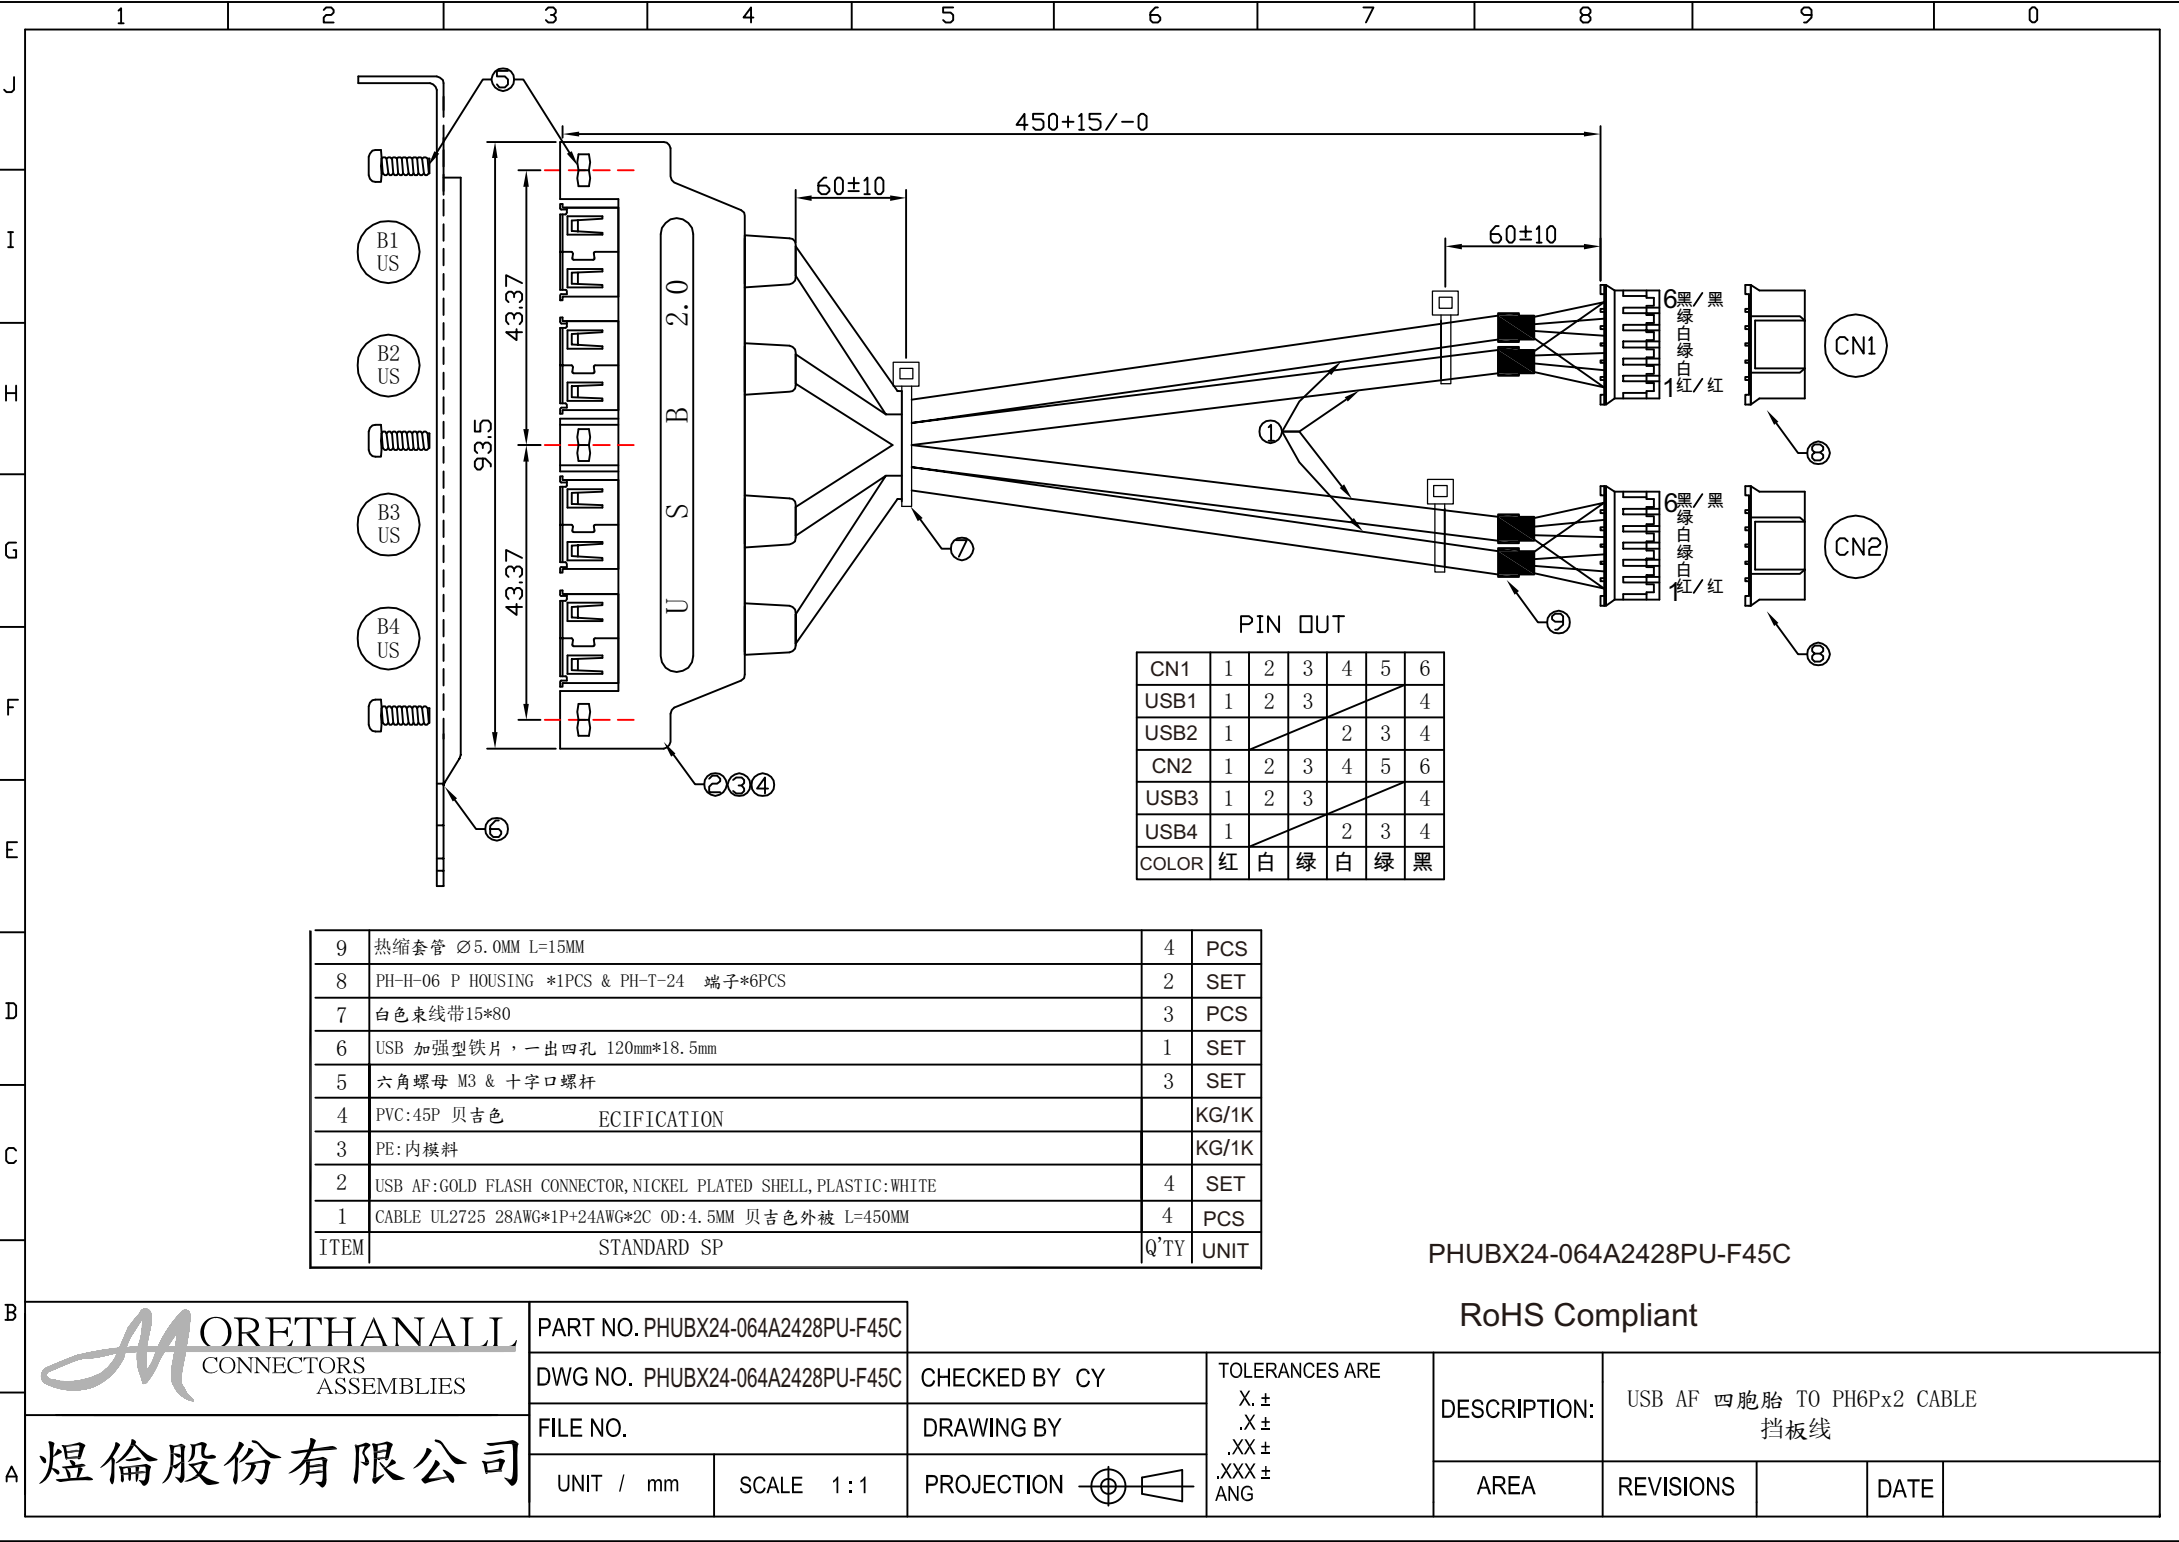

CN1	1	2	3	4	5	6
USB1	1	2	3			4
USB2	1			2	3	4
CN2	1	2	3	4	5	6
USB3	1	2	3			4
USB4	1			2	3	4
COLOR	红	白	绿	白	绿	黑

9	热缩套管 Ø5.0MM L=15MM	4	PCS
8	PH-H-06 P HOUSING *1PCS & PH-T-24 端子*6PCS	2	SET
7	白色束线带15*80	3	PCS
6	USB 加强型铁片，一出四孔 120mm*18.5mm	1	SET
5	六角螺母 M3 & 十字口螺杆	3	SET
4	PVC:45P 贝吉色 ECIFICATION		KG/1K
3	PE:内模料		KG/1K
2	USB AF:GOLD FLASH CONNECTOR,NICKEL PLATED SHELL, PLASTIC:WHITE	4	SET
1	CABLE UL2725 28AWG*1P+24AWG*2C OD:4.5MM 贝吉色外被 L=450MM	4	PCS
ITEM	STANDARD SP	Q'TY	UNIT

PHUBX24-064A2428PU-F45C

RoHS Compliant

MORETHANALL CONNECTORS ASSEMBLIES 煜倫股份有限公司	PART NO. PHUBX24-064A2428PU-F45C		RoHS Compliant							
	DWG NO. PHUBX24-064A2428PU-F45C		CHECKED BY CY	TOLERANCES ARE X.± .X± .XX± .XXX± ANG	DESCRIPTION:	USB AF 四胞胎 TO PH6Px2 CABLE 挡板线				
	FILE NO.		DRAWING BY		AREA	REVISIONS		DATE		
	UNIT / mm	SCALE 1:1	PROJECTION 							