

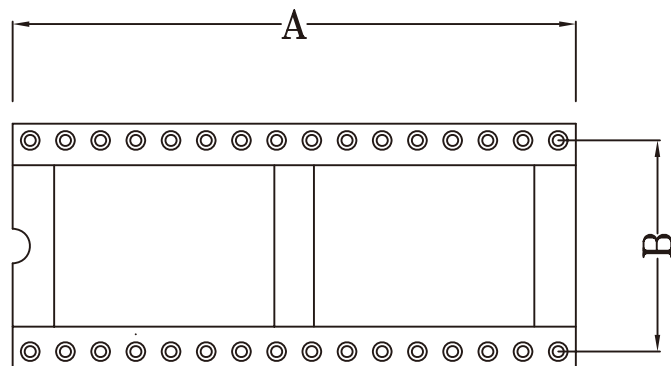


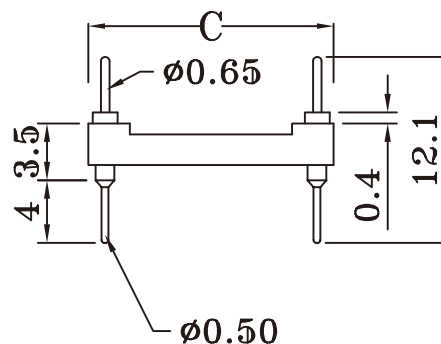

| TYPE<br>1 | DIM<br>A | DIM<br>B | DIM<br>C |
|-----------|----------|----------|----------|
| 20        | 25.40    | 15.24    | 17.78    |
| 24        | 30.48    | 15.24    | 17.78    |
| 28        | 35.56    | 15.24    | 17.78    |
| 32        | 40.64    | 15.24    | 17.78    |
| 36        | 45.66    | 15.24    | 17.78    |
| 40        | 50.80    | 15.24    | 17.78    |
| 42        | 53.34    | 15.24    | 17.78    |
| 48        | 60.96    | 15.24    | 17.78    |
|           |          |          |          |
|           |          |          |          |

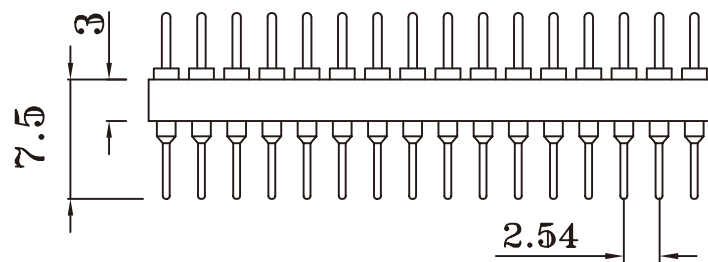

## MATERIAL & FINISH

\* CONTACT: COPPER ALLOY

**GOLD PLATED**

\* SLEEVE: BRASS

PLATING: G= 10 MICRO INCH GOLD

\* INSULATOR: GLASS FILLED POLYESTER,UL 94V-0

\* INSERTION FORCE: AVERAGE 500 GR

\* EXTRACTION TEST: AVERAGE 159 GR

\* RESIST TO SOLDERING HEAT: MAX. 260°C, 5 SEC.

\* CONTACT RESIST: < = 100M OHMS

\* INSULATOR RESIST : > = 5000M OHMS

\* DIELECTRIC WITHSTANDING : 600 VRMS

\* TEMPERATURE: - 55°C TO + 125°C

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



## ORDER INFORMATION

PIC-D06G-xx-LF  
SERIES | | LEADFREE  
20~48WAY  
GOLD  
SPACING 15.24mm  
DIP 180°

DESCRIPTION: