

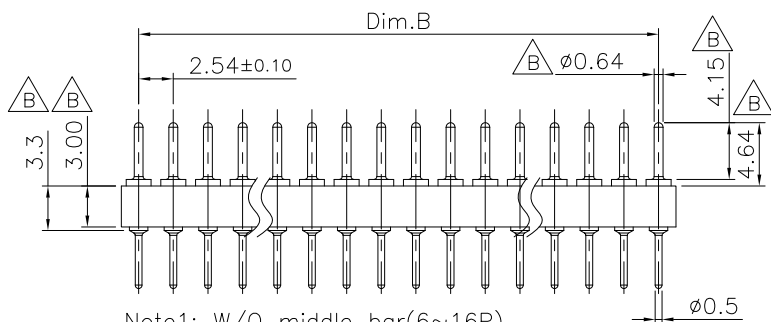


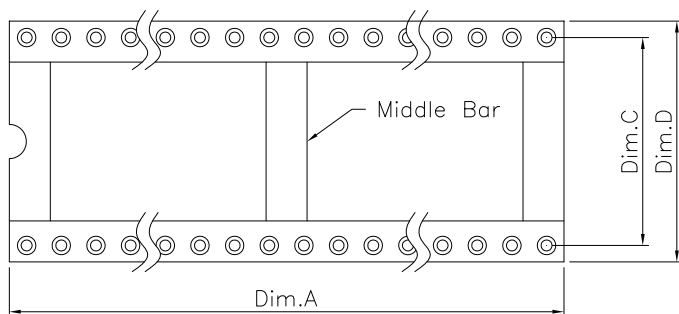


Note1: W/O middle bar(6~16P)
With middle bar(18~64P)




Specifications:
 Current rating:3.0A AC/DC
 Voltage rating:60V AC/DC
 Contact resistance:20m ohm. max.
 Insulator resistance:1000M ohm. Min. at 100V min.
 Withstanding voltage:100V AC for one minute
 Operating temperature range:-40°C to +105°C

Material and Finish:
 Insulator:PBT (UL94V-0)
 Standard Color:Black
 Contact:Brass
 Finish:Gold Or Tin Plated

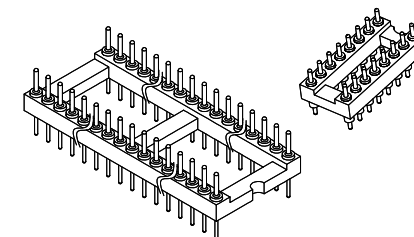

Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space	Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space
6	7.62	5.08	7.62	10.20	03	24	30.48	27.94	15.24	17.80	06
8	10.16	7.62	7.62	10.20		28	35.56	33.02	15.24	17.80	
14	17.78	15.24	7.62	10.20		32	40.64	38.10	15.24	17.80	
16	20.32	17.78	7.62	10.20		40	50.80	48.26	15.24	17.80	
18	22.86	20.32	7.62	10.20		42	53.34	50.80	15.24	17.80	
20	25.40	22.86	7.62	10.20		48	60.96	58.42	15.24	17.80	
24	30.48	27.94	7.62	10.20							
28	35.56	33.02	7.62	10.20							

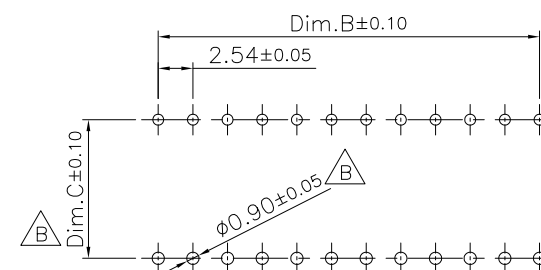

PCB LAYOUT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION


PIC-Dxxy-xx-LF

SERIES LEADFREE
 06~48WAY



G:GOLD
 T:TIN

DIP 180° 03:SPACING 7.62mm
 06:SPACING 15.24mm


DESCRIPTION: 2.54mm Machine Pin Header



PIC-D03y-xx

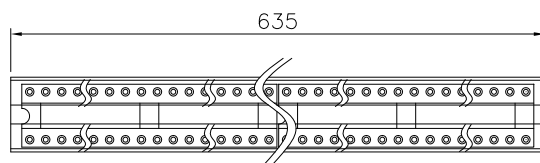

PIC-D06y-xx

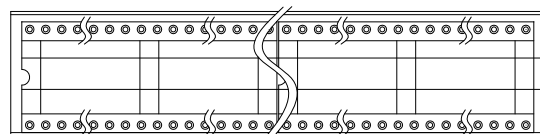

Note:

1,Dimension

Tube Size: L=635mm


Inner Carton Size:660(L)X128(W)X130(H)(mm) **PIC-D03y-xx**

Inner Carton Size:665(L)X128(W)X216(H)(mm) **PIC-D06y-xx**


Carton Size:675(L)X275(W)X150(H)(mm) **PIC-D03y-xx**

Carton Size:680(L)X275(W)X235(H)(mm) **PIC-D06y-xx**

Pin.No	Spacing	Pcs/Tube	Q'TY/Inner Carton	Q'TY/Carton
6	03	80	5600	11200
8		60	4200	8400
10		48	3360	6720
14		34	2380	4760
16		30	2100	4200
18		26	1820	3640
20		24	1680	3360
24		20	1400	1800
28		17	1190	2380
24	06	20	1600	3200
28		17	1360	2720
32		15	1200	2400
40		12	960	1920
42		11	880	1760
48		10	800	1600

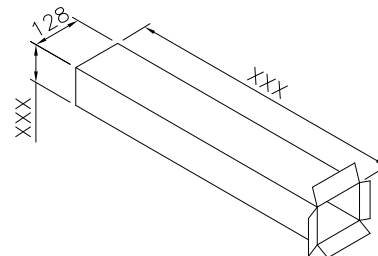

Inner Carton

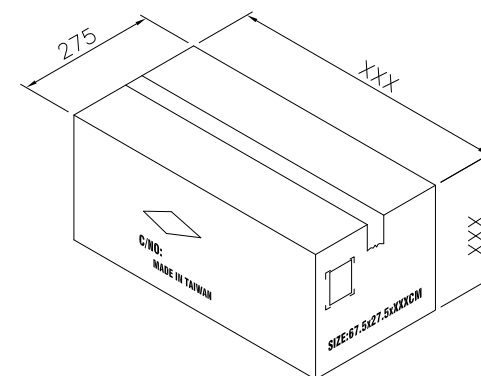

Carton

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PIC-Dxxy-xx-LF

SERIES T LEADFREE
06~48WAY

G: GOLD
T: TIN

DIP 180° 03: SPACING 7.62mm
06: SPACING 15.24mm

DESCRIPTION: 2.54mm Machine Pin Header