


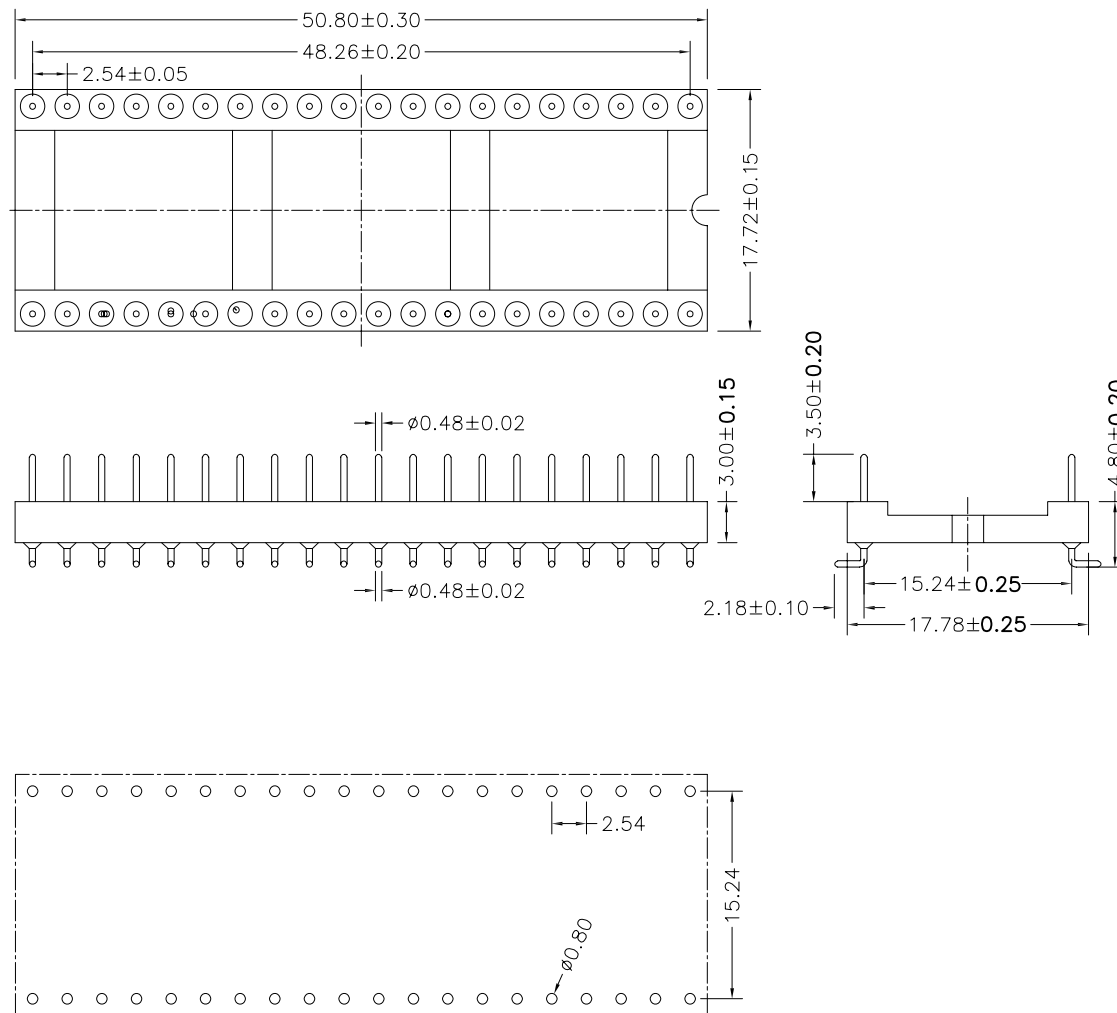

P. C. B LAYOUT

Technical Data

Material:

Pin: Brass, machined CuZn38Pb2

Plating:

Tin Plated: 2m/80m"NI, 5m/200"Sn

Insulator: PPS UL94V-0

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: 10mW/contact

Insulation resistance: 1000M at V=100V

Operating voltage: 60VAC/DC

Mechanical:

Mechanical life cycle: min 500

Operating temperature: -40° C to +105° C

Soldering temperature: +255° C

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.15

.XXX ±

ANG ± 2°

PPOJECTION

ORDER INFORMATION

PIC-V06T-40-LF
SERIES T T LEADFREE
40 WAY
TIN
SPACING 15.24mm
180°SMT

DESCRIPTION: 2.54mm 40P Socket180度SMT Type Stamped L=10.0MM H3.0 P=15.24MM