

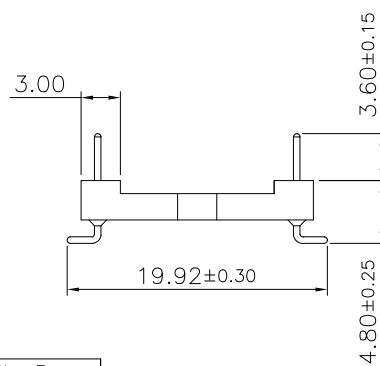
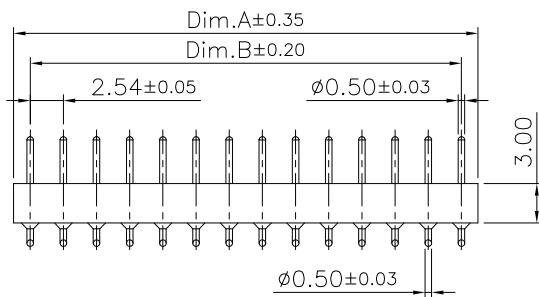


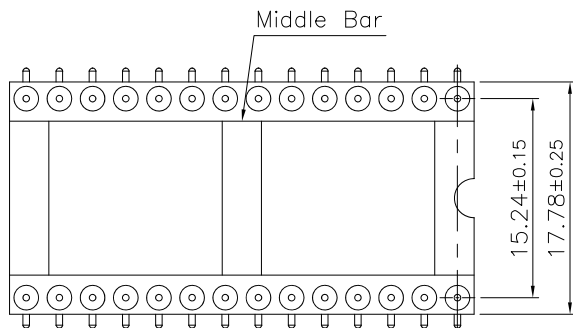

Circuits	DIM.A	DIM.B	Middle Bar	Circuits	DIM.A	DIM.B	Middle Bar
12	15.24	12.70	without middle bar	24	30.48	27.94	with middle bar
16	20.32	17.78		28	35.56	33.02	
18	22.86	20.32		32	40.64	38.10	
20	25.40	22.86		36	45.72	43.18	
				40	50.80	48.26	
				42	53.34	50.80	
				48	60.96	58.42	
				50	63.50	60.96	
				52	66.04	63.50	
				60	76.20	72.66	
				64	81.28	78.74	

Specifications:
 Current Rating: 3.0A AC,DC
 Voltage Rating: 60V AC,DC
 Contact Resistance: 20m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Operating Temperature Range: -40°C ~ +105°C

Material:
 Insulator: High Temperature Plastic (UL94V-0)
 Insulator Color: Black
 Contact: Copper Alloy, Gold/Tin Plated.

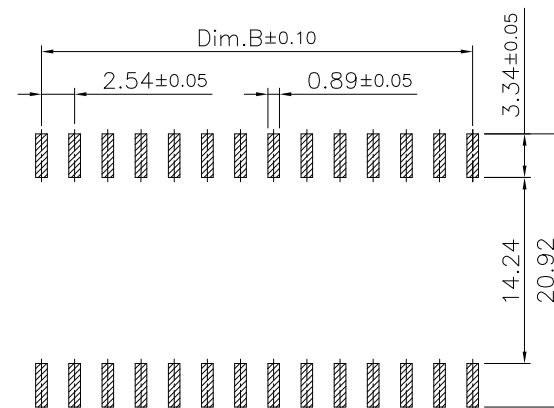

P.C.B Layout
 General Tolerance±0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

PIC-V06x-xx-LF
 SERIES T LEADFREE
 12~64WAY
 G:GOLD
 T:TIN
 180°SMT SPACING 15.24mm

DESCRIPTION: 2.54mm IC Socket Machine Pin SMD Type