

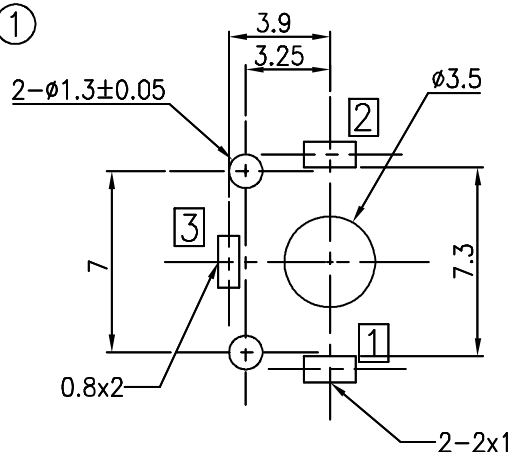
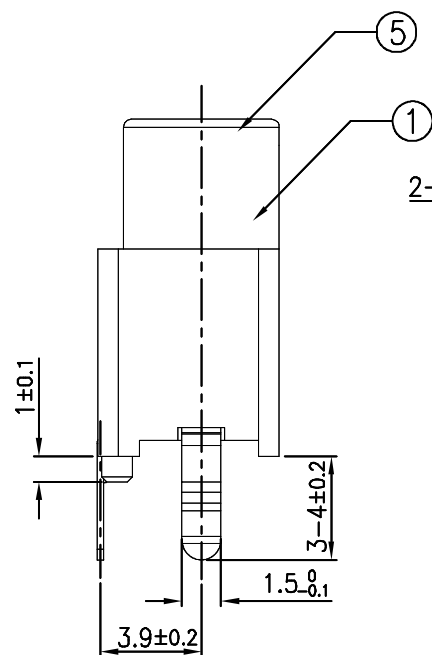
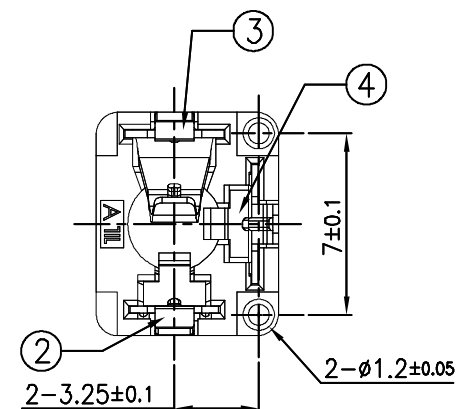
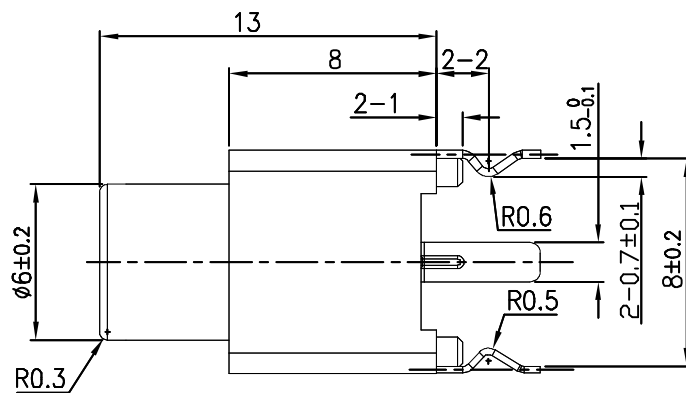


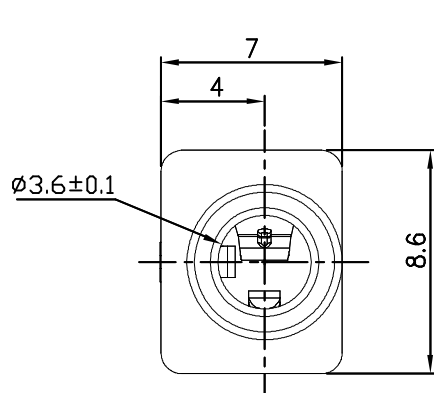

PCB holes(TOP VIEW) t=1.6mm
NOTE: GENERAL TOLERANCE : ±0.1

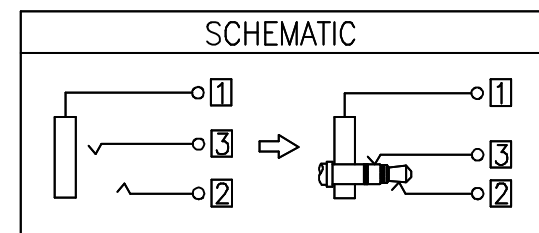

□ : TERMINAL NO.

4	RING SPRING	1	C5210	t=0.25	Cu/Sn PLATED
3	TIP SPRING	1	C5210	t=0.30	Cu/Sn PLATED
2	EARTH SPRING	1	C5210	t=0.25	Cu/Sn PLATED
1	HOUSING	1	PBT		UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PJ-D080-03-LF
SERIES | LEAD FREE
03 WAY
HIGH 8.0mm
DIP 180°

DESCRIPTION: MINIATURE JACK