

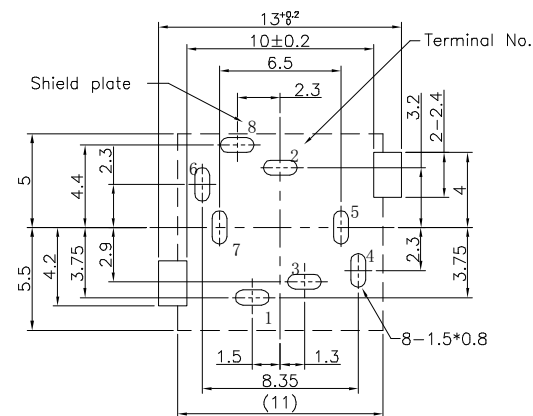
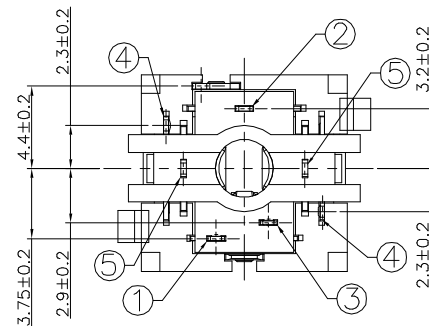
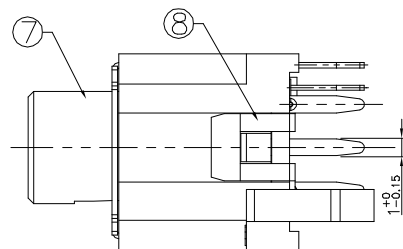
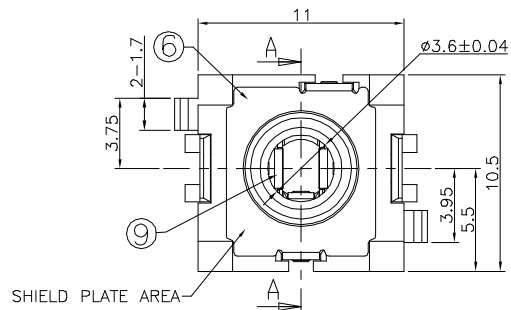





T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-bottom view)

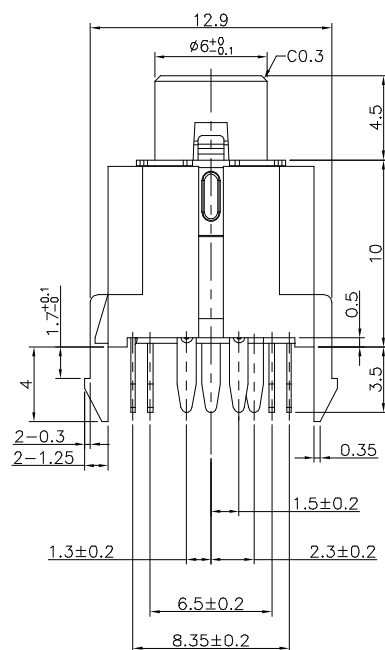

9	INSULATOR	2	POM	UL-94VHB(BLACK)
8	COVER	1	PC	UL-94V0(BLACK)
7	HOUSING	1	PBT 4815	UL-94V0
6	SHIELD PLATE	1	SUS301 t=0.30	Sn PLATED
5	BREAK SPRING	2	C2680 t=0.30	Sn PLATED
4	TRANSFER SPRING	2	C5191 t=0.25	Sn PLATED
3	RING SPRING	1	C5191 t=0.20	Sn PLATED
2	TIP SPRING	1	C5191 t=0.25	Sn PLATED
1	EARTH SPRING	1	C5191 t=0.20	Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PJ-D100-08C-LF
SERIES LEAD FREE
8P3C
HIGH 8.0mm
DIP 180°

DESCRIPTION: MINIATURE JACK