

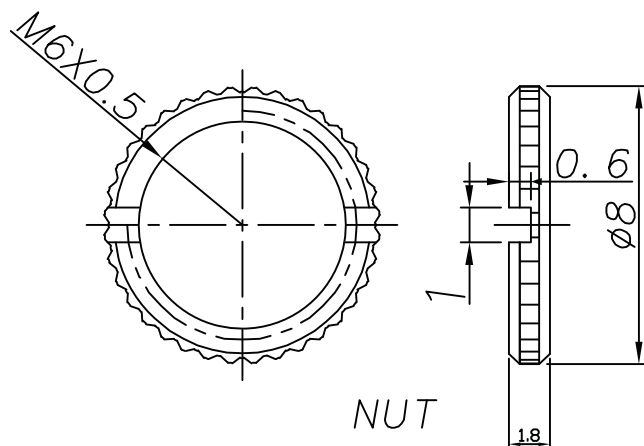
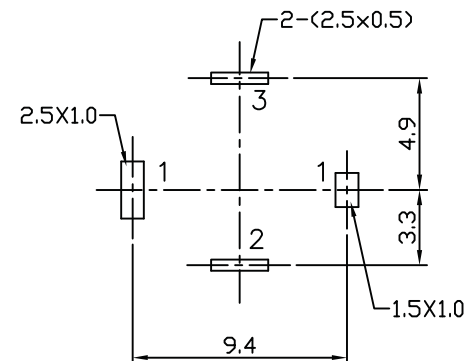
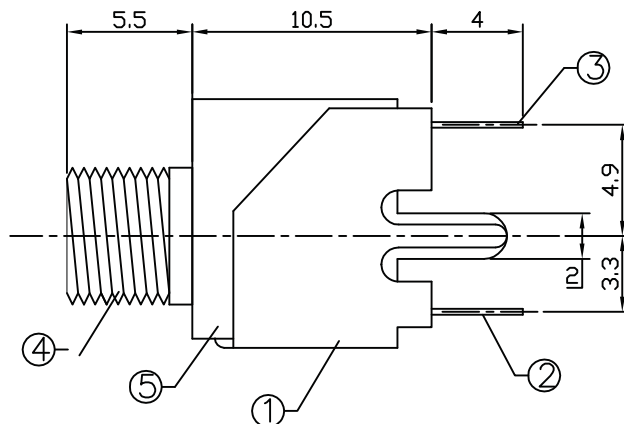


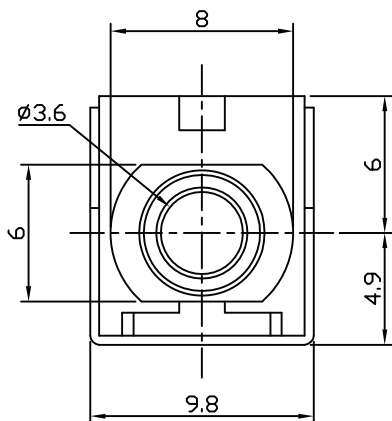

SCHEMATIC



SPECIFICATION

1. Rating DC 30V 0.5A
2. Contact resistance $\leq 0.03\Omega$
3. Insulation resistance $100M\Omega$ (DC250V)
4. Withstand voltage 500VAC
5. Insertion and extraction force 3-25N;
6. life test 5,000 cycles

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES $\pm 0.20mm$.

5	HOUSING	1	ABS	
4	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Cu-Sn-Plating
2	CURVE PIECE	1	H62 BRASS	Sn-Sb-Plating
1	FLAT PIECE	1	IRON	Cu-Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

PJ-D105TN-03B-LF

SERIES
NUT
TEREAD
HIGH 10.5mm
DIP 180°
LEADFREE
3P2C

DESCRIPTION: