

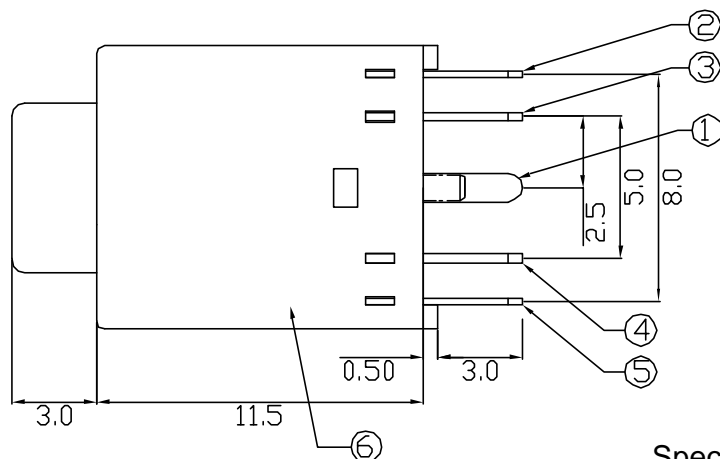
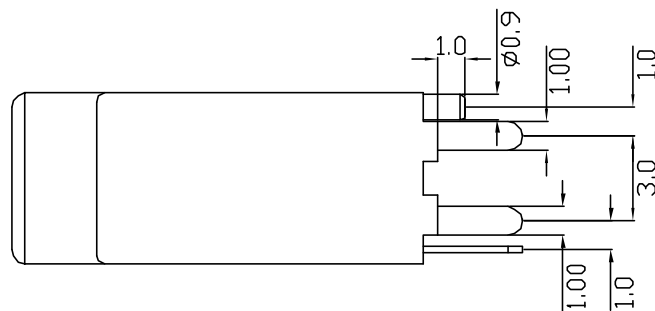
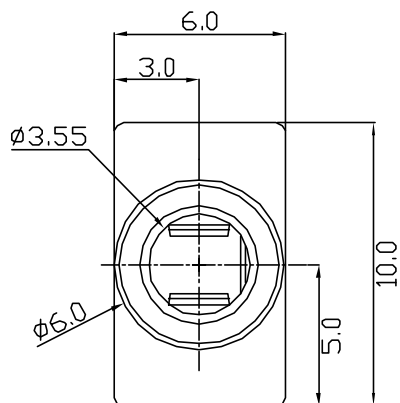




NO.	NAME	MATERIAL	FINISH	Q'TY
1	EARTH TERMINAL	PHOS. BRONZE t=0.25	TIN PLATED	1
2	TIP SPRING	PBS t=0.25	TIN PLATED	1
3	RING SHUNT	BRASS t=0.3	TIN PLATED	1
4	RING SHUNT	BRASS t=0.3	TIN PLATED	1
5	TIP SPRING	PBS t=0.25	TIN PLATED	1
6	HOUSING	PBT G.F.	PINK, 701C PC99	1

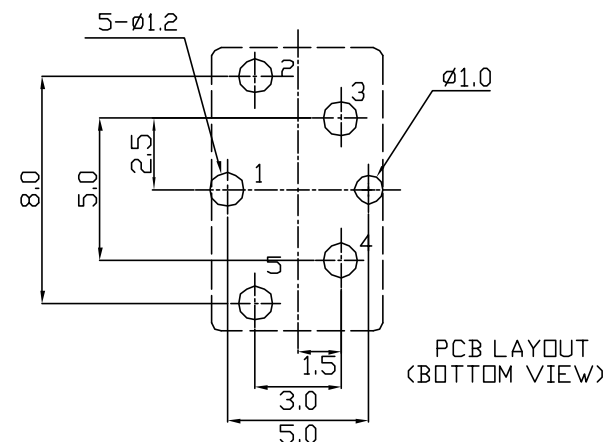

Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max. 1KHz

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V, 2A Max ; AC 100V, 1A Max.

Dielectric Withstanding Voltage: 500V AC For 1 Minute.

Durability (Life Test): For PBS 2000 Cycles Minimum.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0Kg.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.38

.X ± 0.25

.XX ± 0.13

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PJ-D115PK-05C-LF
SERIES
LEADFREE
5P3C
PINK
HIGH 11.5mm
DIP 180°

DESCRIPTION: Ø3.5 EARPHONE JACK VERTICAL 5 PIN DIP