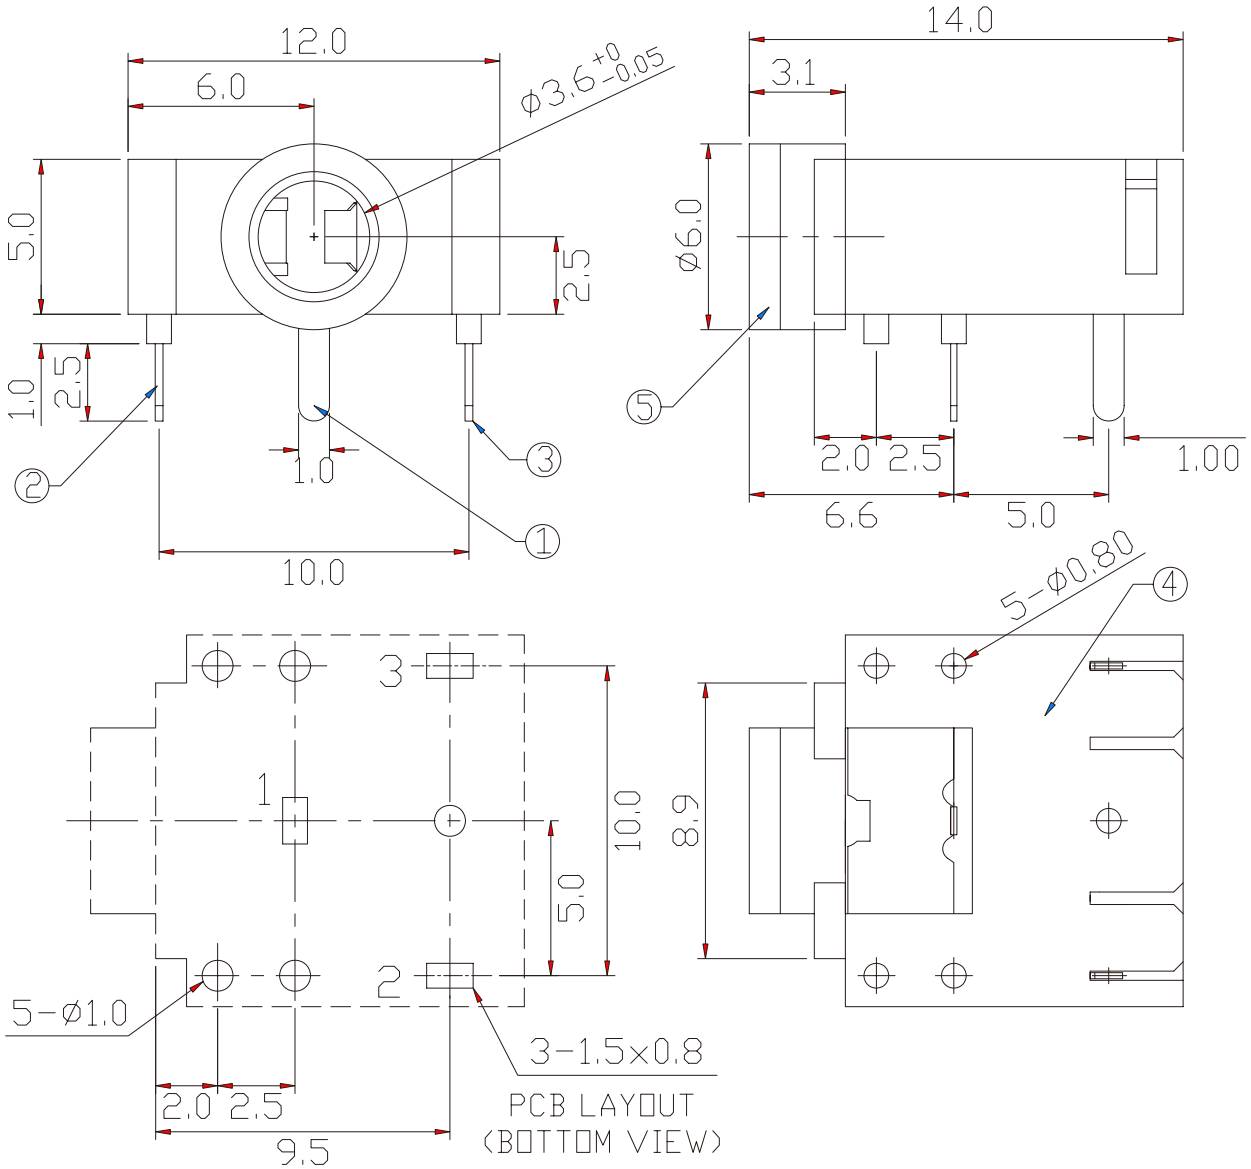

Specification:

Contact Resistance: 30m Ohm. Max At AC 100mA Max.1KHz.

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V,2A Max ; AC 100V,1A Max.

Dielectric Withstanding Voltage: 500V AC For 1 Minute.

Durability (Life Test): A: For Phosphor Bronze 1500 Cycles Minimun.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0Kg.



MODEL NO.	(PC99 COLOR)					
	A	B	C	D	E	F
HOUSING COLOR	PINK	BLACK	LIME	YELLOW	ORANGE	LIGHT BLUE
PANTONE	701C		577C	123C	157C	284C

NO.	NAME	MATERIAL	FINISH	Q'TY
1	GROUND TERM.	PHOS.BRONZE T:0.25	TIN PLATED	1
2	TIP SPRING	PHOS.BRONZE T:0.25	TIN PLATED	1
3	RING SPRING	PHOS.BRONZE T:0.25	TIN PLATED	1
4	HOUSING	PBT G.F.	SEE COLOR	1
5	BUSHING	BRASS	NICKEL PLATED	1

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

PJ-R125xx-03-LF

SERIES

DIP 90°
POST 1.15+2.4+5.0mm

BLANK:BLACK
PK:PINK
LM:LIME
YL:YELLOW
OR:ORANGE
LB:LIGHT BLUE

03 WAY

LEADFREE

DESCRIPTION: 3.5mm EARPHONE JACK FLAT 3 PIN DIP