

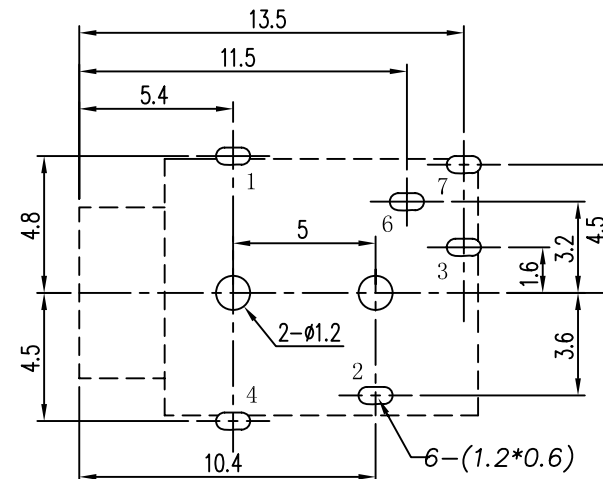
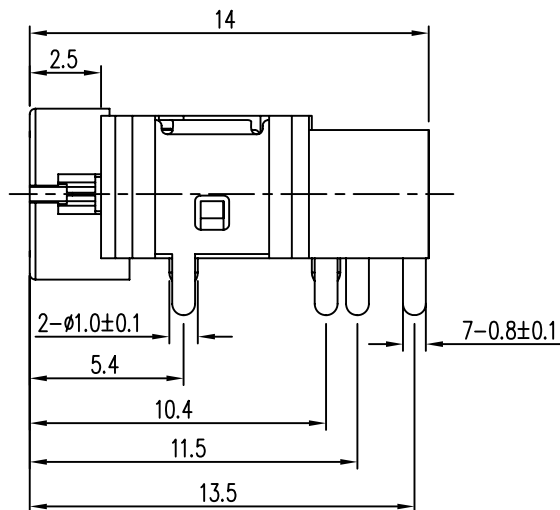
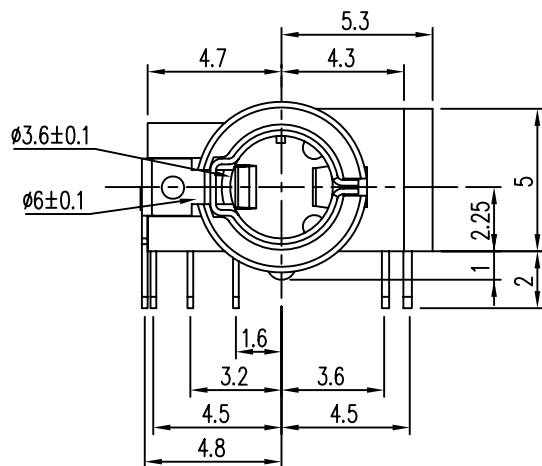
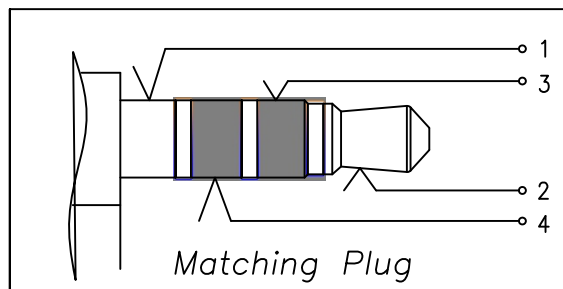




T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)

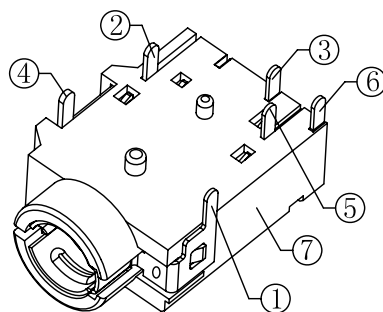

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

7	HOUSING	1	PA66		BLACK
6	TRANSFER TERMINAL 7#	1	C5191	t=0.20	Ag PLATED
5	BREAK TERMINAL 6#	1	C2680	t=0.20	Ag PLATED
4	RING SPRING 4#	1	C5191	t=0.30	Ag PLATED
3	RING SPRING 3#	1	C5191	t=0.20	Ag PLATED
2	TIP SPRING 2#	1	C5191	t=0.25	Ag PLATED
1	EARTH SPRING 1#	1	C5191	t=0.20	Au PLATED
LTR	PART NAME	QTY	MATERIAL		REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PJ-R25N-06D-LF
SERIES
LEADFREE
6P4C
INNER SIDE METAL BUSHING
FOOTPRINT 2.5mm
DIP 90°

DESCRIPTION: MINIATURE JACK