

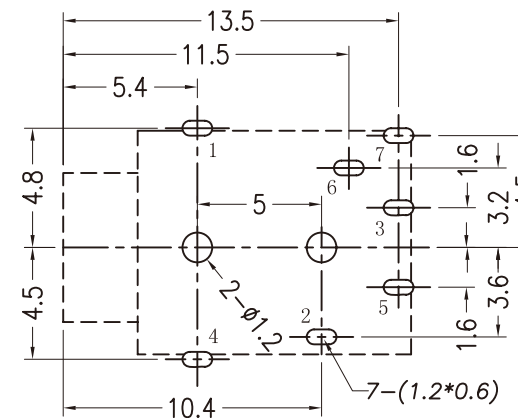
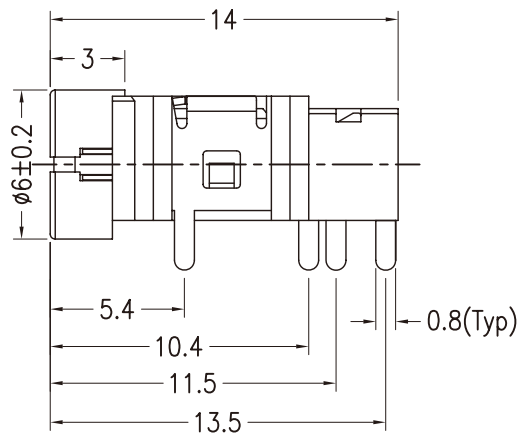
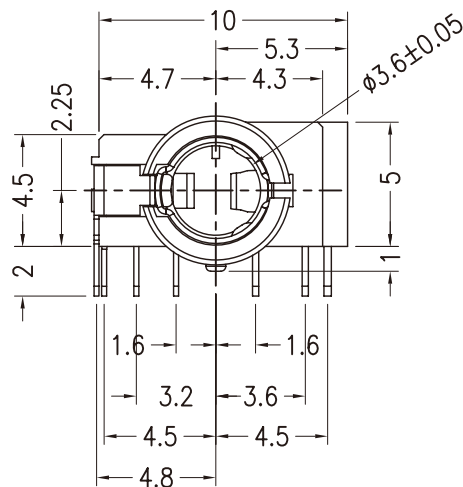



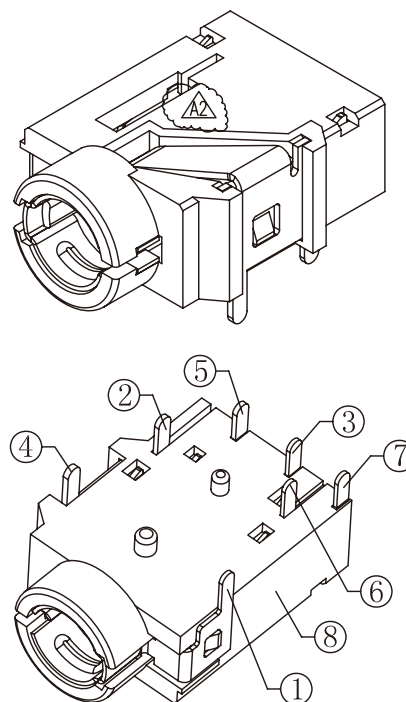

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

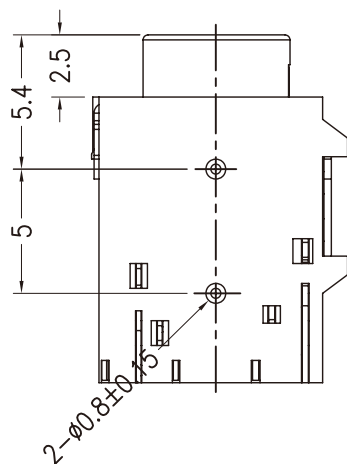

LTR	PART NAME	QTY	MATERIAL	REMARK
8	HOUSING	1	PBT 4815	UL-94V0(BLACK)
7	TRANSFER TERMINAL	1	SUS301 t=0.20	MB:Ni Ag PLATED
6	BREAK TERMINAL	1	C2680 t=0.20	MB:Ni Ag PLATED
5	SHUNT TERMINAL	1	C2680 t=0.25	MB:Ni Ag PLATED
4	RING SPRING	1	C5191 t=0.30	MB:Ni Ag PLATED
3	RING SPRING	1	SUS301 t=0.20	MB:Ni Ag PLATED
2	TIP SPRING	1	C5191 t=0.25	MB:Ni Ag PLATED
1	EARTH SPRING	1	C5191 t=0.20	MB:Ni Au PLATED

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

照片框

ORDER INFORMATION

PJ-R25N-07E-LF
SERIES | LEADFREE
7P5C
INNER SIDE METAL BUSHING
FOOTPRINT 2.5mm
DIP 90°

DESCRIPTION: MINIATURE JACK