
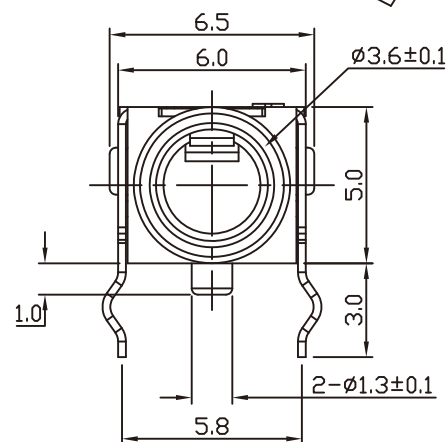
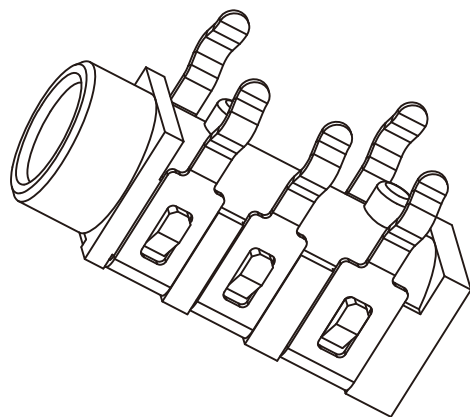
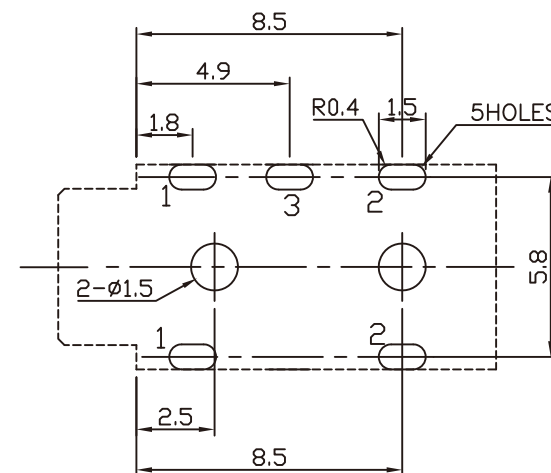
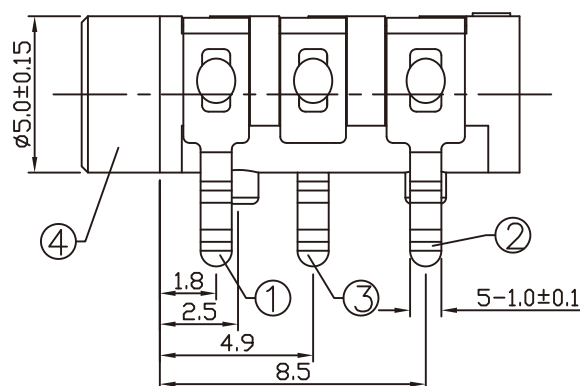


UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

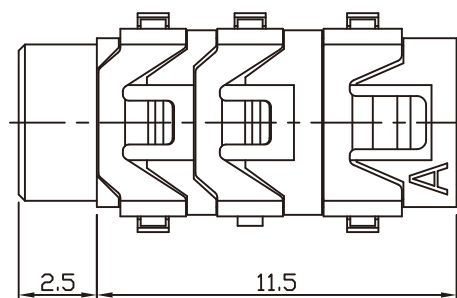

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

4	HOUSING	1	PBT 4815	UL-94V0
3	3# CONTACT FOOT	1	C5191 t=0.25	MB:Ni Ag PLATED
2	2# CONTACT FOOT	1	C5191 t=0.25	MB:Ni Ag PLATED
1	1# CONTACT FOOT	1	C5191 t=0.25	MB:Ni Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PJ-R26K-03-LF
SERIES KINK POST 2.1+6.0mm
LEADFREE
03 WAY
DIP 90°

DESCRIPTION: MINIATURE JACK