

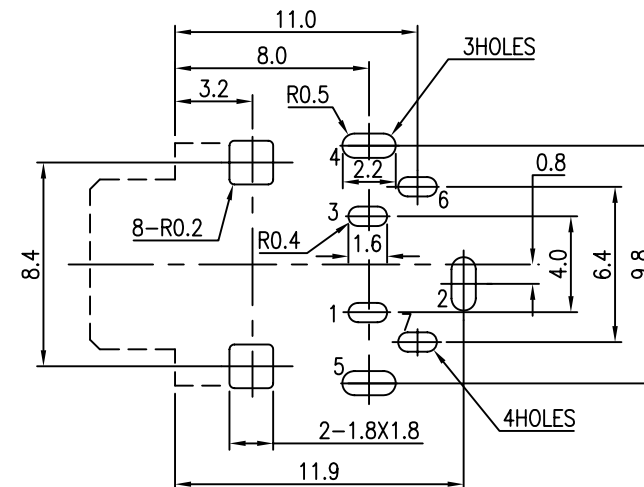
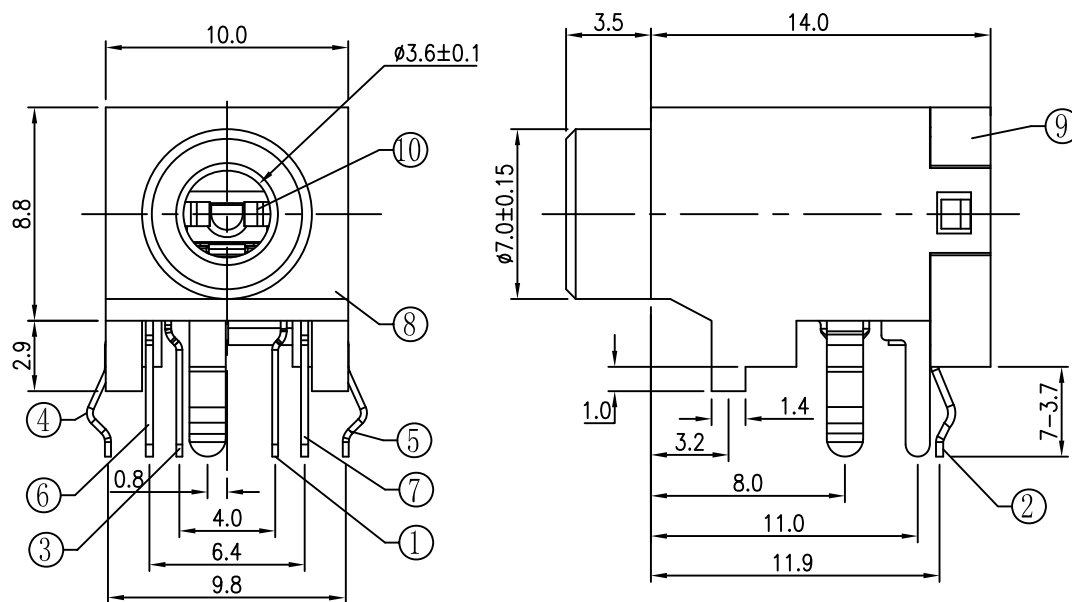


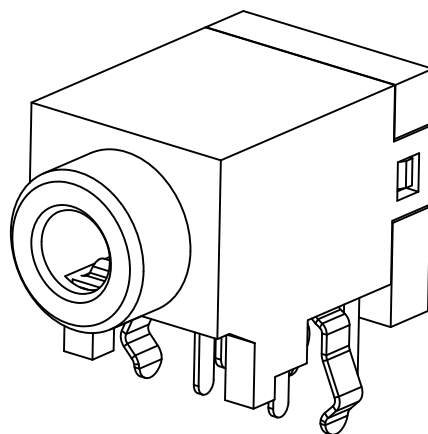

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)



UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

10	SWICH KNOB	1	POM	BLACK
9	COVER	1	PBT 4815	UL-94V0(BLACK)
8	HOUSING	1	PBT 4815	UL-94V0(BLACK)
7	7#CONTACT FOOT	1	C2680	t=0.30 Ag PLATED
6	6#CONTACT FOOT	1	C2680	t=0.30 Ag PLATED
5	5#CONTACT FOOT	1	C5191	t=0.25 Ag PLATED
4	4#CONTACT FOOT	1	C5191	t=0.25 Ag PLATED
3	3#CONTACT FOOT	1	C5191	t=0.25 Ag PLATED
2	2#CONTACT FOOT	1	C5191	t=0.30 Ag PLATED
1	1#CONTACT FOOT	1	C5191	t=0.25 Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

ORDER INFORMATION

PJ-R30B-07C-LF
SERIES | LEADFREE
7P3C
BUSHING
POST 3.2mm
DIP 90°

DESCRIPTION: MINIATURE JACK