

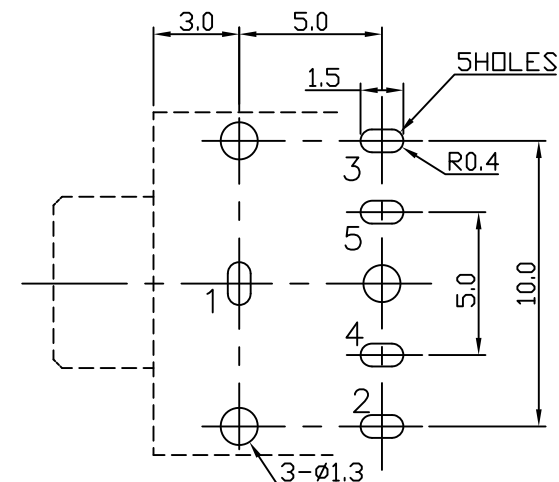
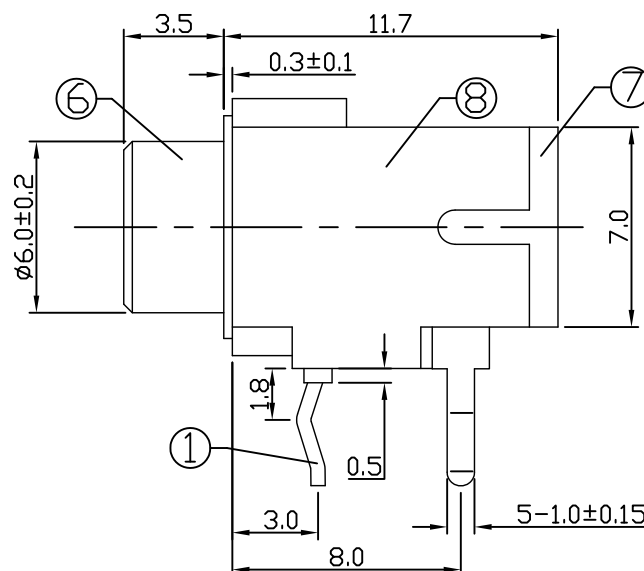
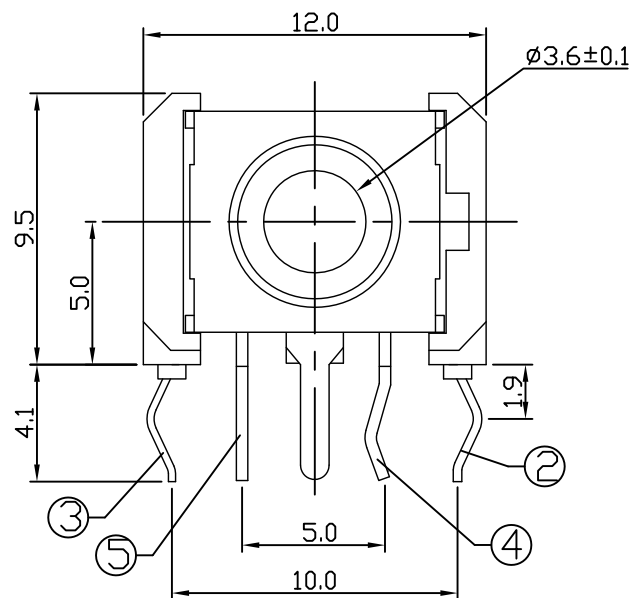




T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

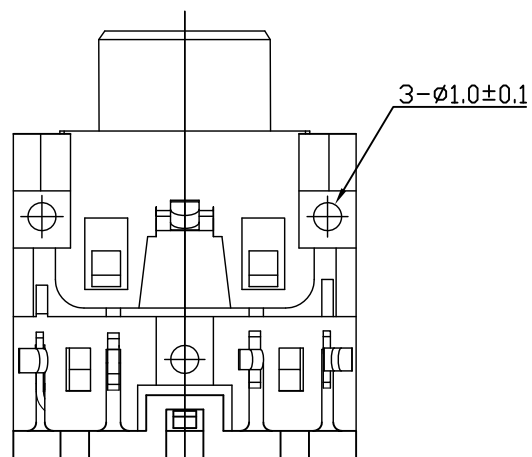

8	HOUSING	1	PA66	UL-94HB
7	COVER	1	PBT 4815	UL-94V0
6	BUSHIGN	1	H59(COPPER ALLOY)	MB:Cu Ni PLATED
5	SHUNT TERMINAL	1	C2680 t=0.40	MB:Cu Sn PLATED
4	SHUNT TERMINAL	1	C2680 t=0.40	MB:Cu Sn PLATED
3	RING SPRING	1	C5191 t=0.25	MB:Cu Sn PLATED
2	TIP SPRING	1	C5191 t=0.30	MB:Cu Sn PLATED
1	EARTH TERMINAL	1	C2680 t=0.50	MB:Cu Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PJ-R35-05C-LF

SERIES
LEADFREE
5P3C
3.0+5.0mm
DIP 90°

DESCRIPTION: MINIATURE JACK