

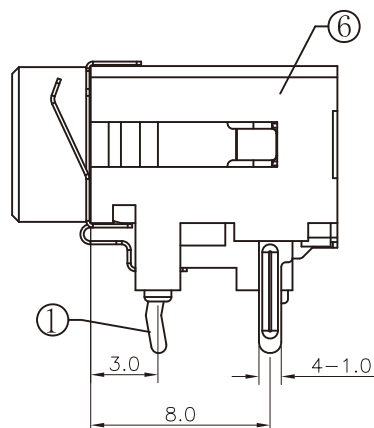
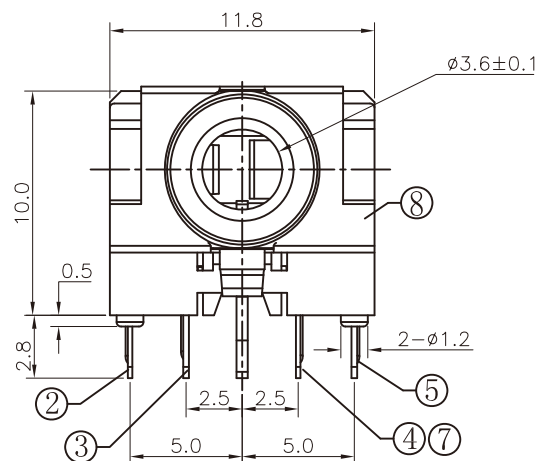
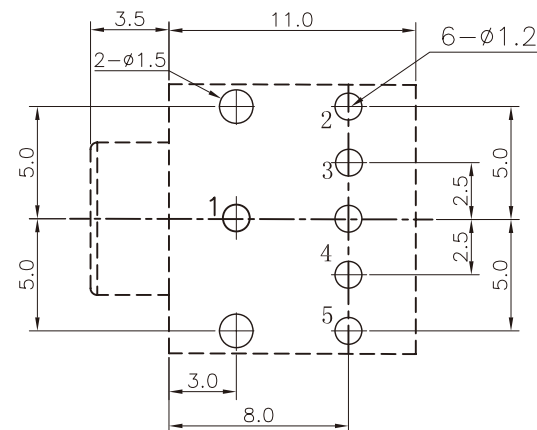
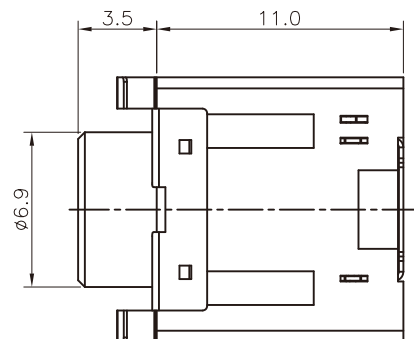


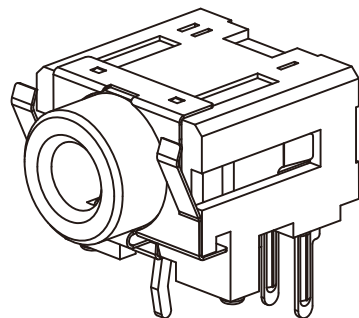

SCHEMATIC

PJ-R35S-05C



T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

8	SPRING PIECE	1	SUS301	t=0.15	
7	4#ISOLATION BLOCK	1	POM		BLACK
6	HOUSING	1	PBT 4815		UL-94V0
5	SPRING PIECE	1	C5191	t=0.25	Ag PLATED
4	SPRING PIECE	1	C5191	t=0.20	Ag PLATED
3	CONTACT FOOT	1	C5191	t=0.25	Ag PLATED
2	SPRING PIECE	1	C5191	t=0.20	Ag PLATED
1	CONTACT FOOT	1	C5191	t=0.50	Ag PLATED
LTR	PART NAME	QTY	MATERIAL		REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

PJ-R35S-05C-LF

SERIES
LEADFREE
5P3C
SPRING
3.0+5.0mm
DIP 90°

DESCRIPTION: MINIATURE JACK