

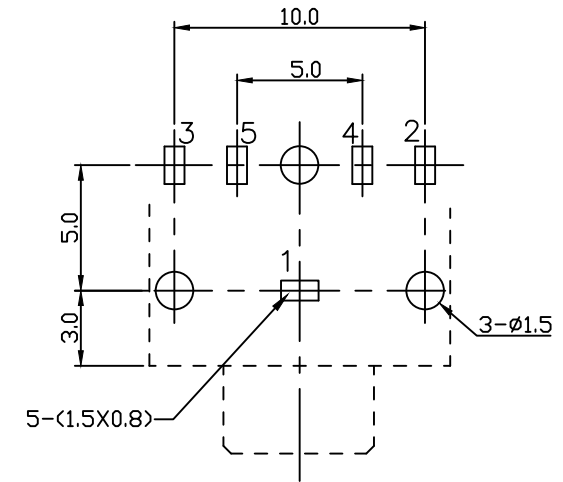
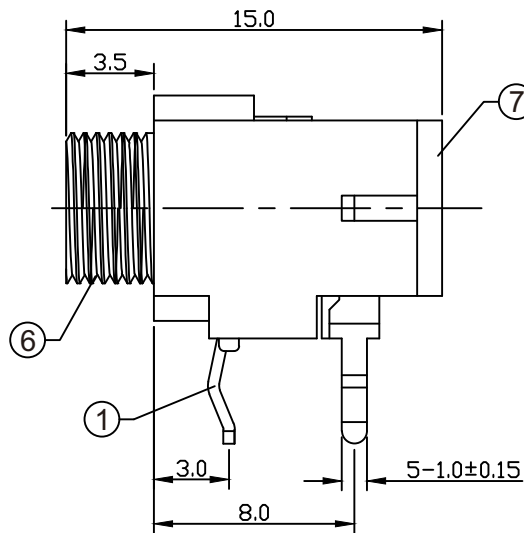
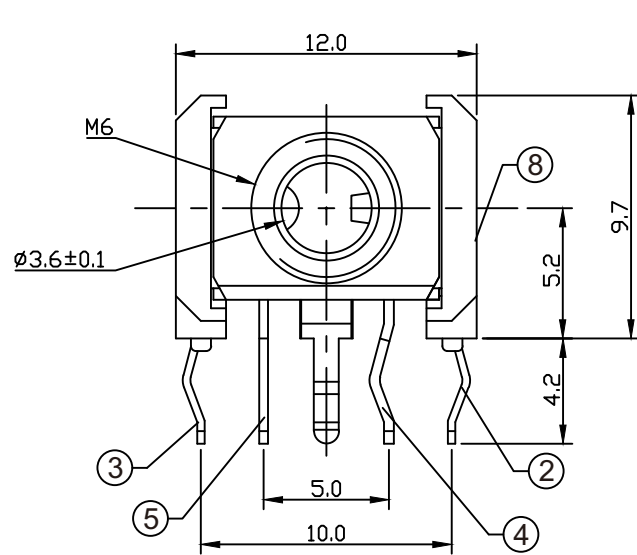




T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

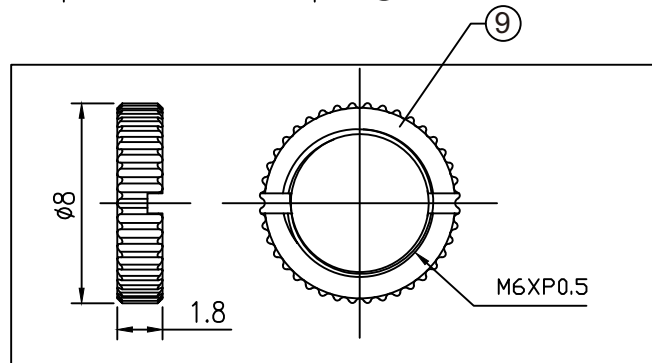

9	NUT	1	COPPER ALLOY	Ni PLATED
8	HOUSING	1	PBT 4815	UL-94V0
7	COVER	1	PBT 4815	UL-94V0
6	AXIS SUPPORT	1	H59(COPPER ALLOY)	Cu/Sn PLATED
5	5# CONTACT FOOT	1	C2680 t=0.40	Ag PLATED
4	4# CONTACT FOOT	1	C2680 t=0.40	Ag PLATED
3	3# CONTACT FOOT	1	C5191 t=0.30	Ag PLATED
2	2# CONTACT FOOT	1	C5191 t=0.30	Ag PLATED
1	1# CONTACT FOOT	1	C2680 t=0.40	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PJ-R35T3N-05C-LF
SERIES NUT LEADFREE
5P3C
THREAD 3.5mm
3.0+5.0mm
DIP 90°

DESCRIPTION: MINIATURE JACK