



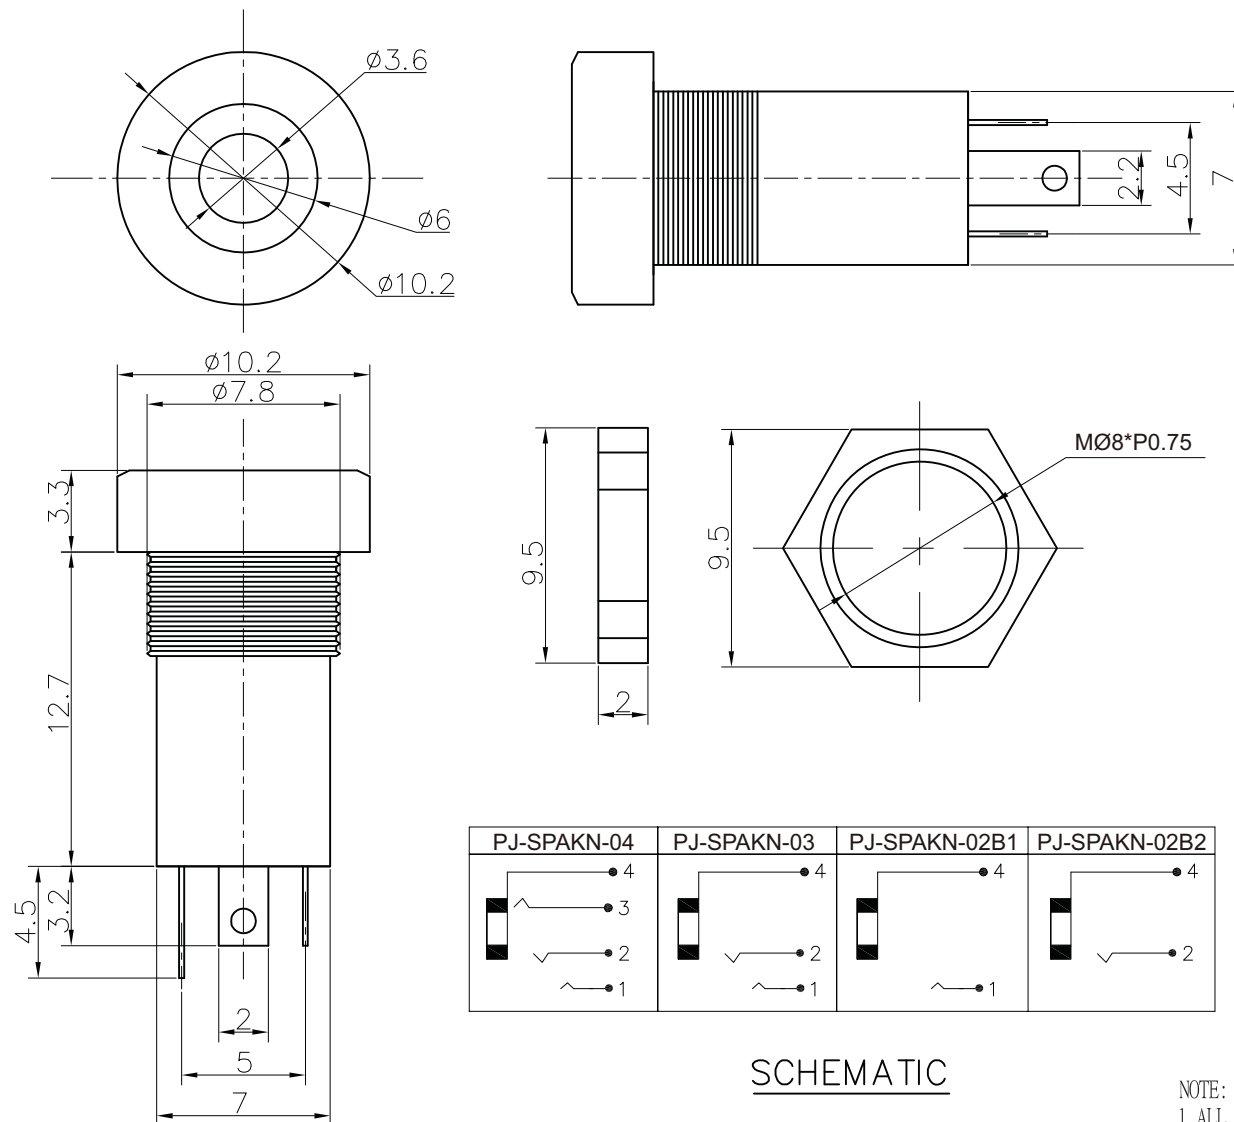

SPECIFICATION

1. Rating DC 12V 1.0A
2. Contact resistance $\leq 0.03\Omega$
3. Insulation resistance $100M\Omega$ (DC250V)
4. Withstand voltage 500VAC
5. Insertion and extraction force 3–30N;
6. Life test 5,000 cycles
7. Temperature range: $-25 \sim +85$

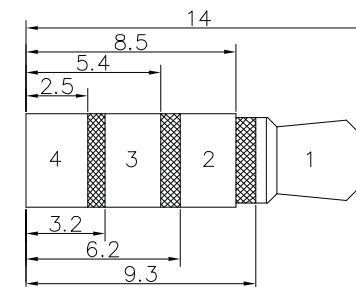

SCHEMATIC

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES $\pm 0.20\text{mm}$.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

PJ-SPAKN-xx-LF
SERIES NUT BLACK PANEL FRONT SOLDER
LEADFREE
04.03.02B2.02B1 WAY

DESCRIPTION: