

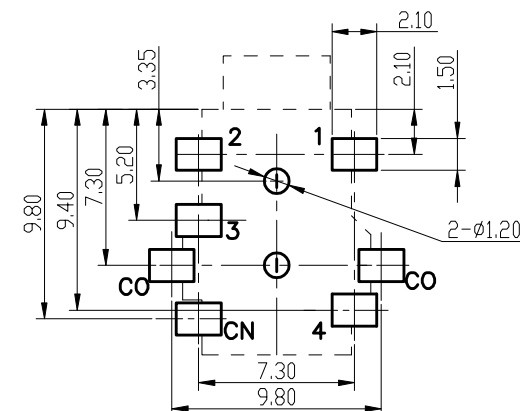
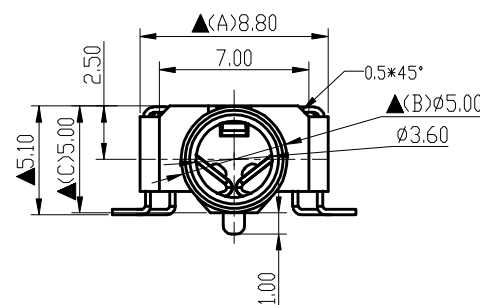
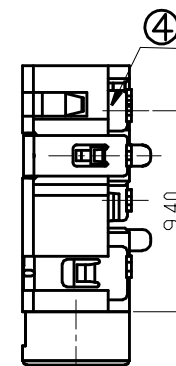

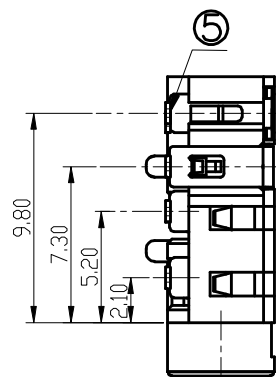



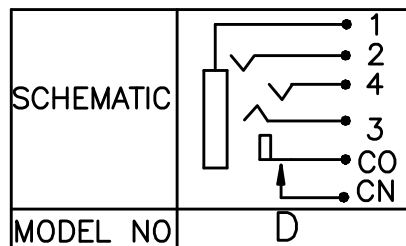

Pin Hole Layout
(Jack Bottom View)

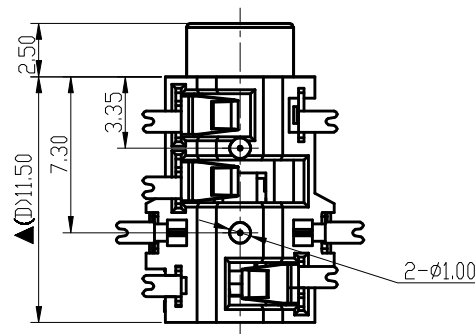

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insertion Resistance : 100MΩ min. at DC 500V
 Electric Withstanding Voltage: AC 500V for one minute
 Mark: ▲: The Most Important Dimension

5.	Make Contact	0.25T Brass	1	Gold Plated
4.	Contact	0.25T Phosphor Bronze	3	Gold Plated
3.	Transfer Contact	0.25T Phosphor Bronze	1	Gold Plated
2.	Earth Contact	0.25T Phosphor Bronze	1	Gold Plated
1.	Housing	PA9T	1	Black Color
NO.	Description	Material	Q'TY	Finish

PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±


PPOJECTION

照片框

ORDER INFORMATION

PJ-W34R-06D-LF
 SERIES REEL POST 3.35+3.95mm 90°SMT
 LEADFREE 6P4C

DESCRIPTION: 3.5φ PHONE JACK

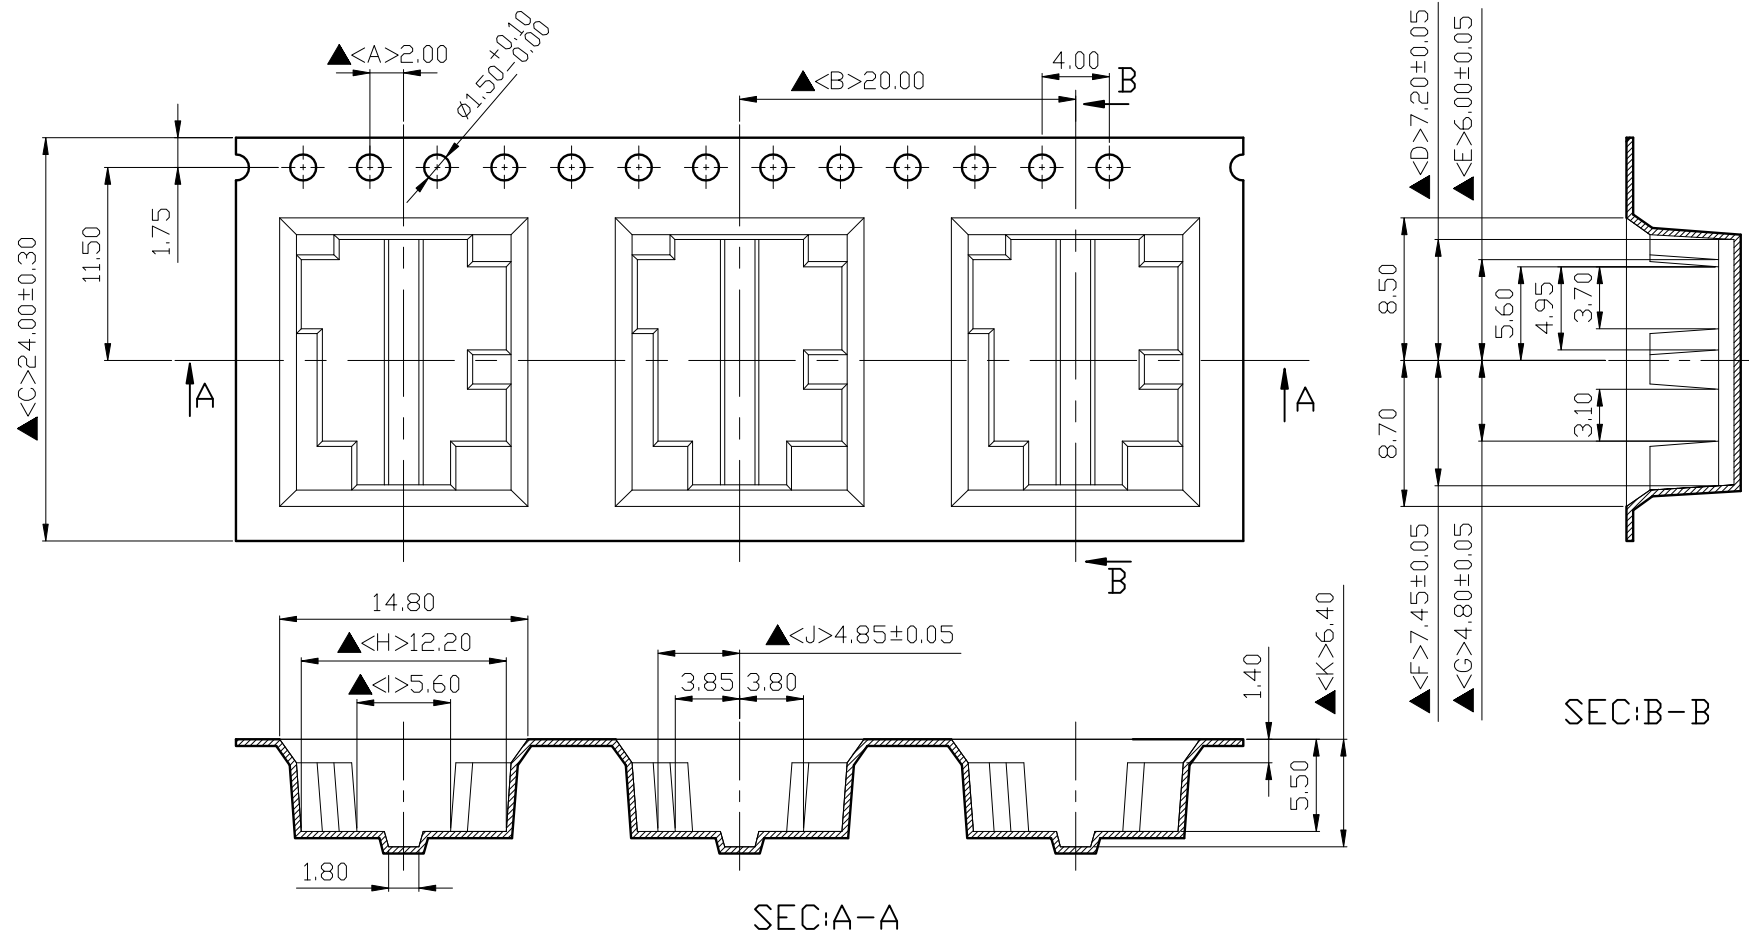

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PJ-W34R-06D-LF

SERIES

REEL

6P4C

LEADFREE

POST 3.35+3.95mm

90°SMT

DESCRIPTION: 3.5 ϕ PHONE JACK