
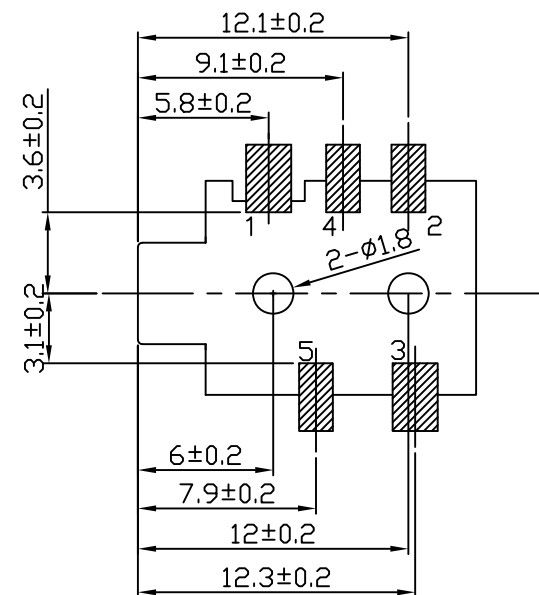
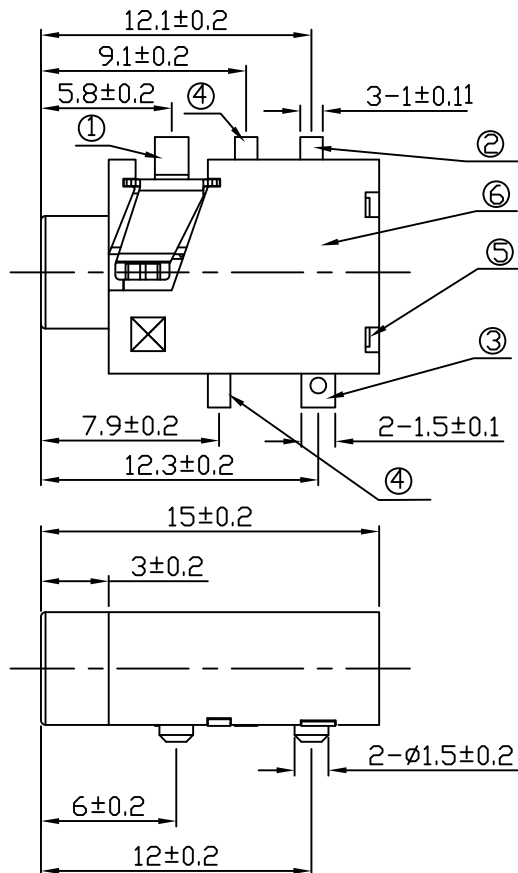
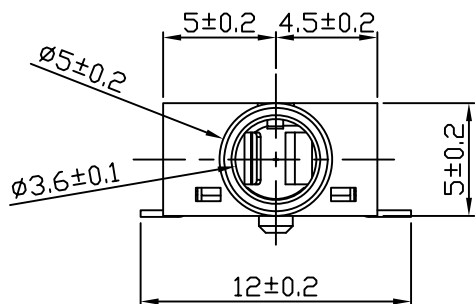


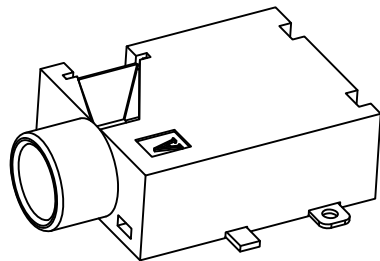

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

SCHEMATIC			
PJ-W36-05C	PJ-W36-04C	PJ-W36-03	PJ-W36-03B

6	HOUSING	1	PA9T	UL-94V0(BLACK)
5	COVER	1	LCP	UL-94V0(BLACK)
4	TERMINAL	2	C2680 t=0.30	MB:Cu Ag Plated
3	SPRING TERMINAL	1	C5191 t=0.20	MB:Cu Ag Plated
2	SPRING TERMINAL	1	C5191 t=0.20	MB:Cu Ag Plated
1	CONTACT FOOT	1	C5191 t=0.30	MB:Cu Ag Plated
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION



ORDER INFORMATION

PJ-W36-xx-LF
SERIES | LEADFREE
SCHEMATIC
3.0+6.0mm
90°SMT

DESCRIPTION: MINIATURE JACK