
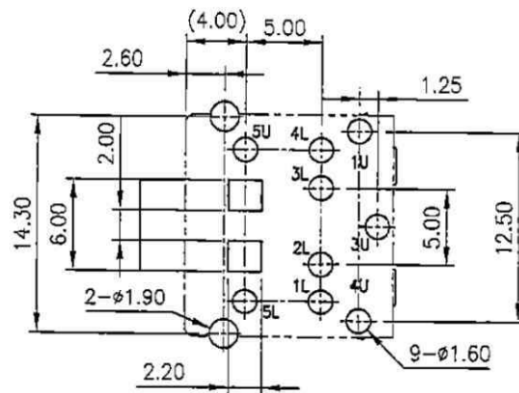

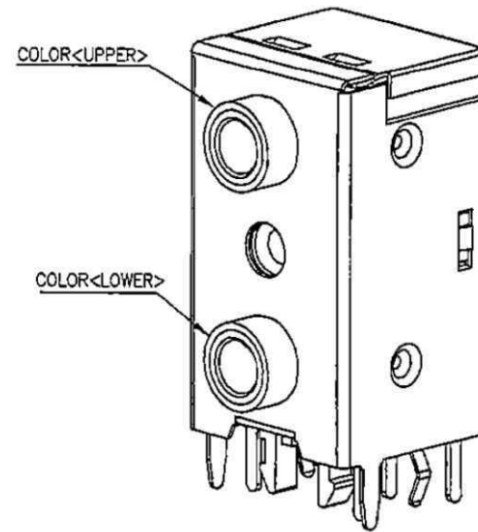
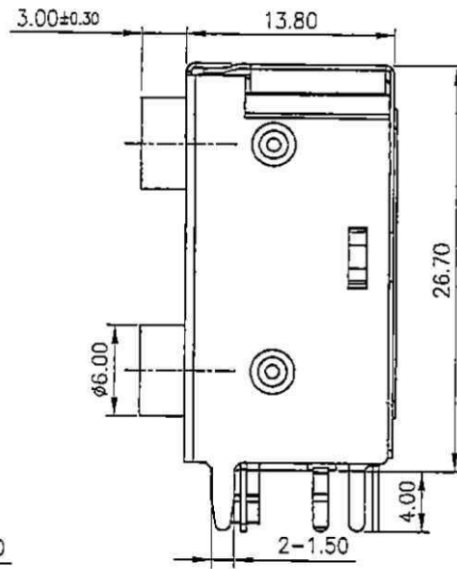


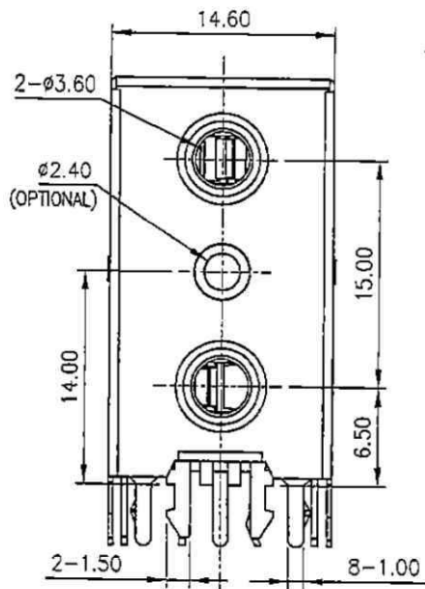

RECOMMENDED PCB LAYOUT
<BOTTOM VIEW>

SCHEMATIC			
PJB1-RFEM24xx-06	PJB1-RFEM24xx-08	PJB1-RFEM24xx-08L	PJB1-RFEM24xx-09

17	COLOUR RING	THERMOPLASTIC		2
16	METAL RING	COPPER ALLOY	NI	2
15	GROUND(UPPER)	COPPER ALLOY	TIN	1
14	GROUND(LOWER)	COPPER ALLOY	TIN	1
13	SOLDER LEAD	COPPER ALLOY	TIN	1
12	CONTACT(TIP)	COPPER ALLOY	TIN	1
11	SHUNT OF TIP	COPPER ALLOY	TIN	1
10	SOLDER LEAD	COPPER ALLOY	TIN	1
9	CONTACT(RING)	COPPER ALLOY	TIN	1
8	TIP CONTACT	COPPER ALLOY	TIN	1
7	SHUNT OF TIP	COPPER ALLOY	TIN	1
6	SHUNT OF RING	COPPER ALLOY	TIN	1
5	RING CONTACT	COPPER ALLOY	TIN	1
4	SHIELD	SPCC	NI	1
3	SHIELD	SPCC	NI	1
2	COVER	THERMOPLASTIC		1
1	PLASTIC HOUSING	HIGH TEMP PLASTIC		1
ITEM	DESCRIPTIONs	MATERIAL	FINISH	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PJB1-RFEM24xx-xx-LF
SERIES T T T T T LEADFREE
DIP 90° 06:06 WAY
FULL METAL 09:09 WAY
EAR 2.4mm HOLE
MIDDLE

DESCRIPTION: