


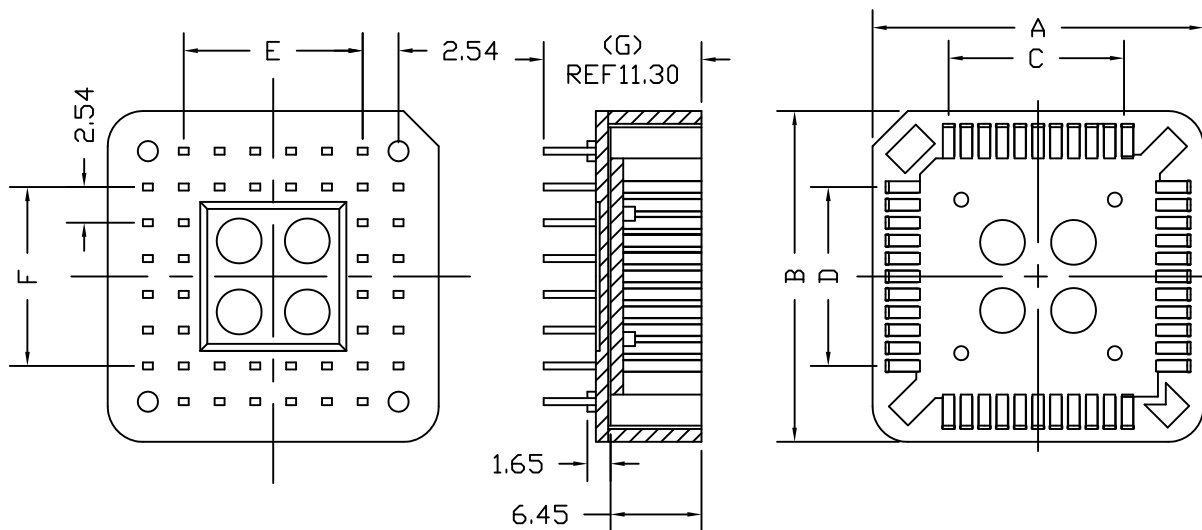

MATERIAL:

INSULATOR :Hi-temp PBT UL 94V-0

Contact material:phosphor bronze

SPECIFICATIONS:

Temperature range:-50° C to 105° C

CURRENT Rating :1 AMP

Durability:5 cycles (Min)

Contact resistance:30 Milliohms (Max)

Insulation Resistance :1000 Megohmx (Min)

Withstanding Voltage: AC 500 V/min

MIDDLE TYPE:

NO. OF CONTACT	A±0.15	B±0.15	C±0.1	D±0.1	E±0.1	F±0.1
20 PBT	15.50	15.50	5.08	5.08	5.08	5.08
28 PBT	18.04	18.04	7.62	7.62	7.62	7.62
32 PBT	18.04	20.60	7.62	10.16	7.62	10.16
44 PBT	23.48	23.48	12.70	12.70	12.70	12.70
52 PBT	25.88	25.88	15.24	15.24	15.24	15.24
68 PBT	31.04	31.04	20.32	20.32	20.32	20.32
84 PBT	36.04	36.04	25.40	25.40	25.40	25.40
68 PBT	31.66	31.66	20.32	20.32	20.32	20.32
84 PBT	36.66	36.66	25.40	25.40	25.40	25.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ±
ANG ± 2°

照片框

ORDER INFORMATION

PL-DG-xx-LF
SERIES | LEADFREE
20~84WAY
GOLD
DIP 180°

DESCRIPTION: