
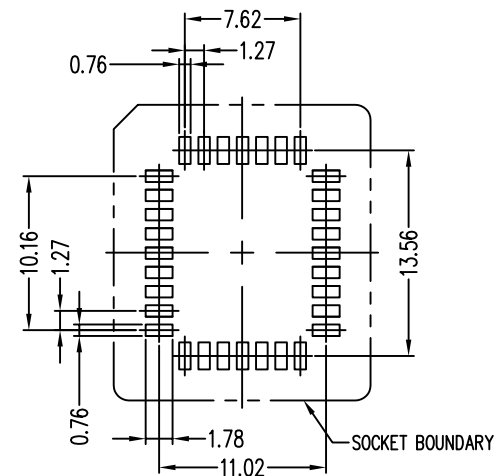

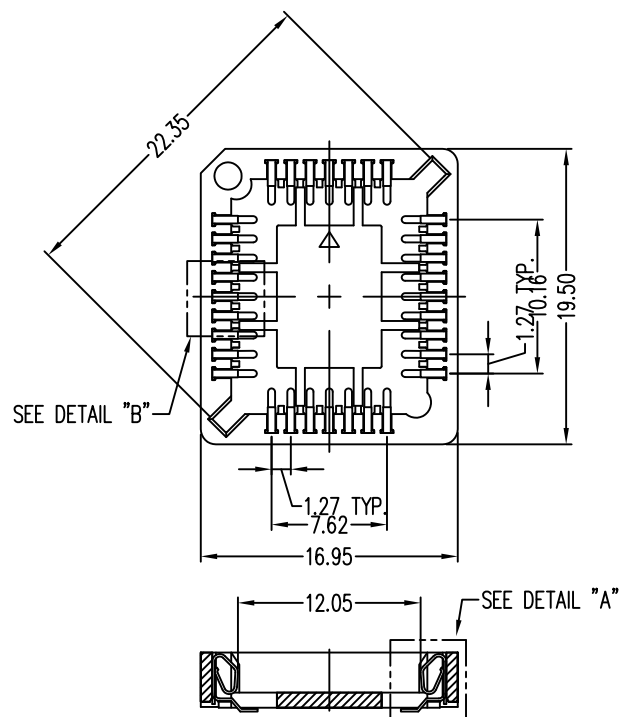


PERFORMANCE CHARACTERISTICS



Operating Voltage: 250VAC Max.
 Current Rating: 1 Amp Max.
 Contact Resistance: 20 mΩ Max.
 Insulation Resistance: 1000 MΩ Min.
 Dielectric Withstanding Voltage: 600 VAC RMS.
 for 1 minute.
 Operating Temperature: -40°C TO +85°C

MATERIAL

Insulator: Glass reinforced PPS
 UL94V-0 Rated
 Color: Brown
 Contact: Phosphor Bronze
 Plating: SEE ORDERING INFORMATION

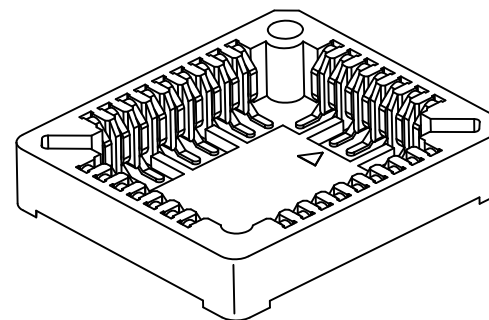

RECOMMENDED PCB LAYOUT



RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

PL-V38-32-LF
 SERIES LEADFREE
 32 WAY
 HIGH 3.81mm
 180°SMT

DESCRIPTION: