



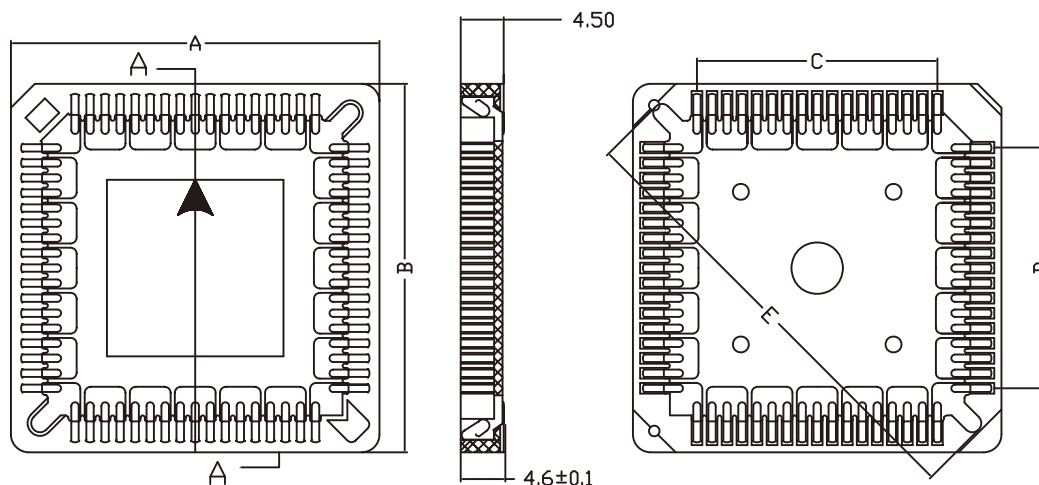

SECTION A-A

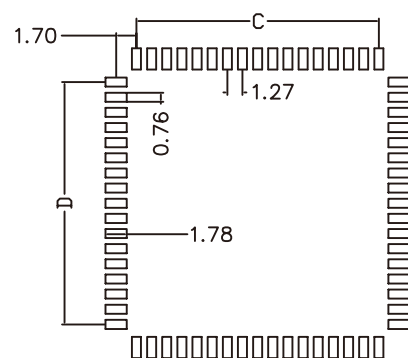

P.C.B LAYOUT

MATERIAL:

INSULATOR :Hi-temp PPS. UL 94V-0, 240°C

Contact material:phosphor bronze JIS 5210

Contact Platred :150μ"tin over 40μ"nickel

SPECIFICATIONS:

Temperature range:-50°C to 105°C

CURRENT Rating :1 AMP

Capacitance:1.0 Picoforads (Max)

Contact resistance:30 Milliohms (Max)

Insulation Resistance :1000 Megohms (Min)

Withstanding Voltage: AC 600 Vrms

The soldering heat is 260 deg for 5 Seconds

NO. OF CONTACT	A±0.2	B±0.2	C±0.1	D±0.1	E±0.2
20	15.66	15.66	5.08	5.08	17.28
28	18.20	18.20	7.62	7.62	20.87
32	18.20	20.74	7.62	10.16	23.15
44	23.28	23.28	12.70	12.70	28.05
52	25.82	25.82	15.24	15.24	31.65
68	30.90	30.90	20.32	20.32	38.83
84	35.98	35.98	25.40	25.40	46.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PROJECTION


X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PL-VR-xx-LF
SERIES | T | LEADFREE
20~84WAY
REEL
180°SMT

DESCRIPTION:

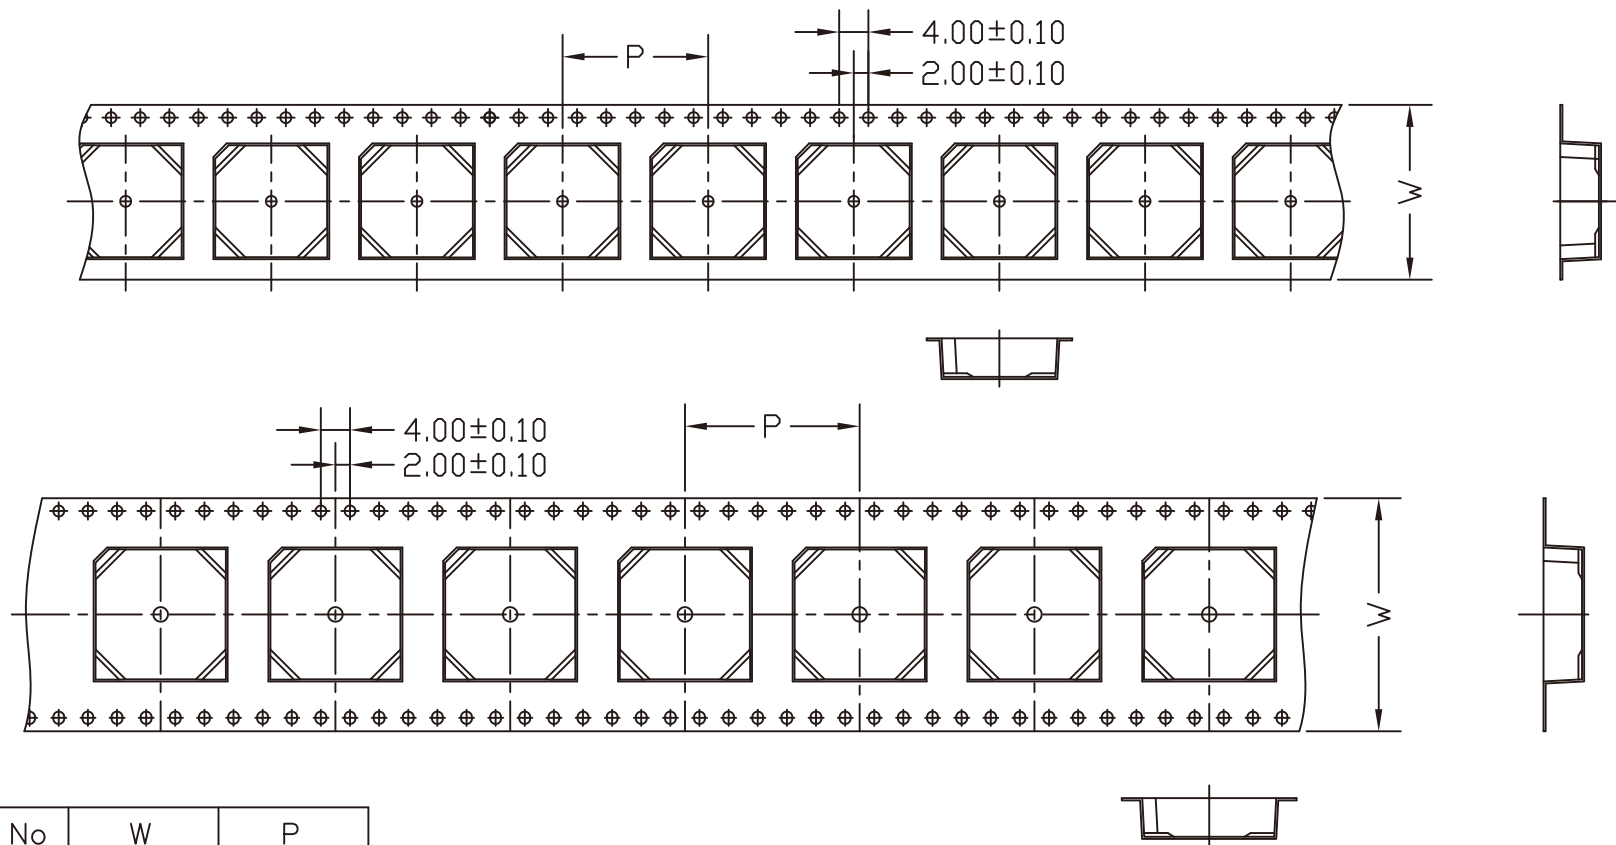

Pin No	W	P
20P	24	24
32P	32	24
44P	44	32
52P	44	32
68P	44	36
84P	56	40

- All Dimension in millimeters -

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

PL-VR-xx-LF
SERIES | LEADFREE
20~84WAY
REEL
180°SMT

DESCRIPTION: