


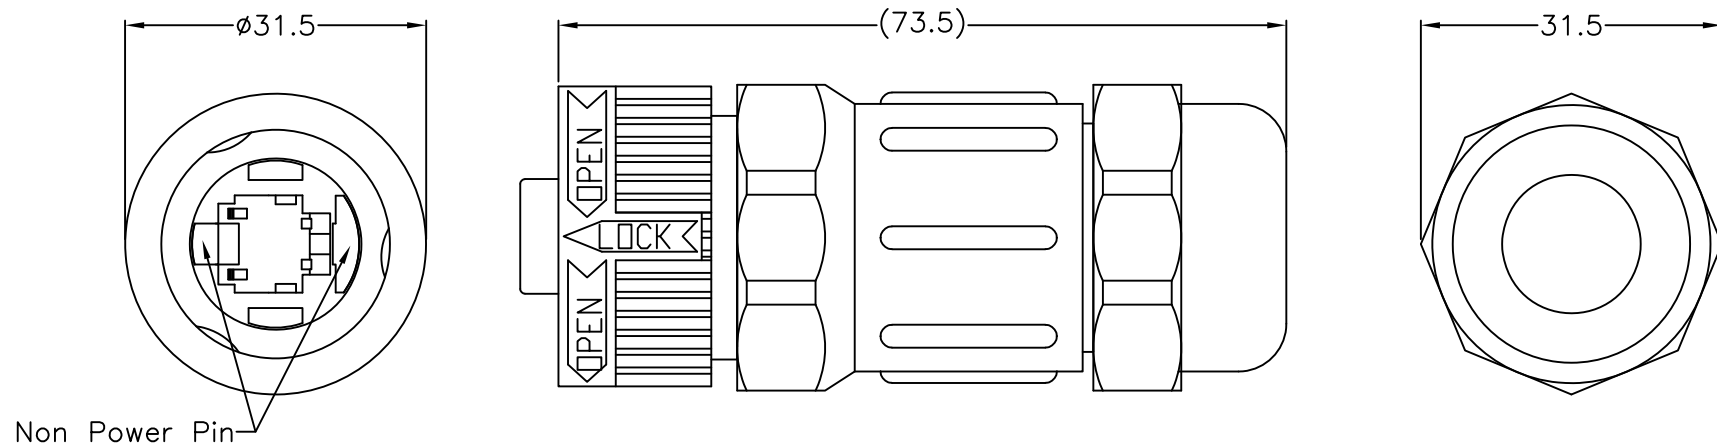

Note:

- ①* Connector: Nylon+GF,Black
- ②* O-Ring: EPDM,Black
- ③* Housing: Nylon+GF,Black
- ④* Seal: EPDM,Black
- ⑤* Wire Clip: Nylon
- ⑥* Sealing Nut: Nylon+GF,Black

Recommendation:

- * Waterproof Rate: IP67
- * For Cable OD: $\phi 5.0 \sim \phi 15.0$
- * RJ45 Plug 置於組裝殼內

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PLKRJ-PA-0808-LF

SERIES

LEADFREE

8P8C

ASSEMBLIES

MALE

DESCRIPTION: PUSH LOCK RJ45 PLUG ASSY