


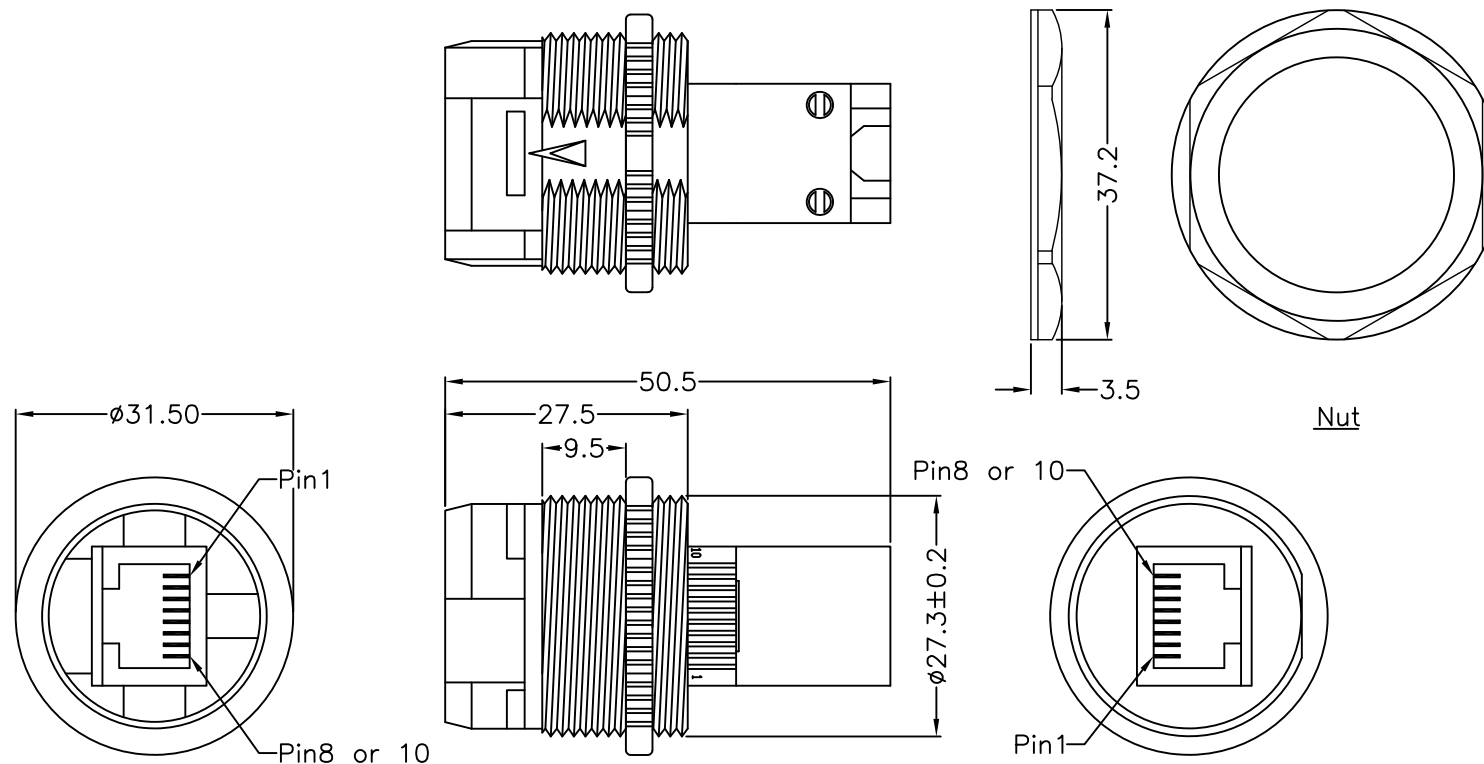

Shield		Shield
10		10
9		9
8		8
7		7
6		6
5		5
4		4
3		3
2		2
1		1
8P&10P		8P&10P


Pin Definition

Note:

- * Housing: Nylon+GF,Black
- * RJ45 Jack: Shielded Jack 8Pin or 10Pin
- * PCB: FR-4
- * Gasket: EPDM,Black
- * Nut: Nylon+GF,Black

Recommendation:

- * Waterproof Rate: IP67
- * For Panel Thickness Max 5.0mm

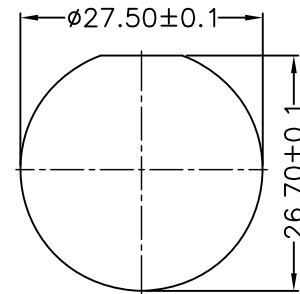

Panel Cut-Out

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.10
.XXX ±
ANG ±

ORDER INFORMATION

PLKRJX2-FSPBN-0808-LF

SERIES

LEADFREE

8P8C

NUT

PANEL BACK

FEMALE TO FEMALE

DESCRIPTION: PUSH LOCK RJ45 JACK