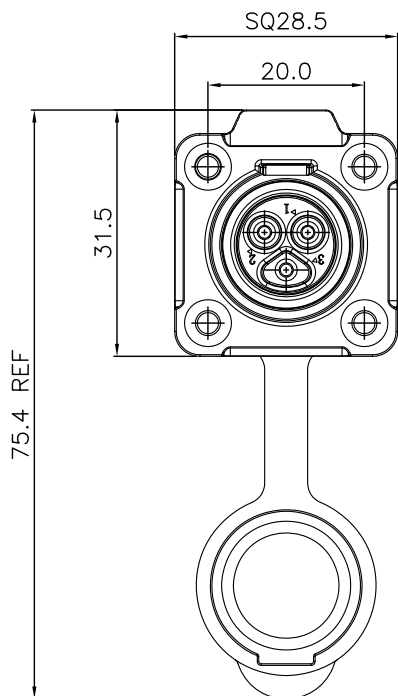


RECOMMENDED PANEL HOLE

SPECIFICATIONS:
 Current Rating:PIN Number-A 10A;PIN Number-B 5A
 Operating Voltage:400V MAX.
 Voltate Rating:2500V MAX.
 Contact Resistance:5.0mΩ MAX.
 Cable OD:φ3.0-φ8.5mm
 Waterproof Standard:IP 67

3	Metal	Zinc Alloy	Chrome Ptd.	1
2	Contact	Phosphor Bronze	Gold Ptd.	2-9
1	Housing	PBT		2
No.	Description	Material	Treat	Q'ty

PIN NUMBER-A(10A)			PIN NUMBER-B(5A)			
2P	3P	4P	5P	7P	8P	9P

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PLM23-SSPQCV-xx-LF

SERIES

LEADFREE
 02-09 WAY
 DUST COVER
 PANEL Q TYPE
 SOLDER
 FEMALE

DESCRIPTION: Metal Female Socket