
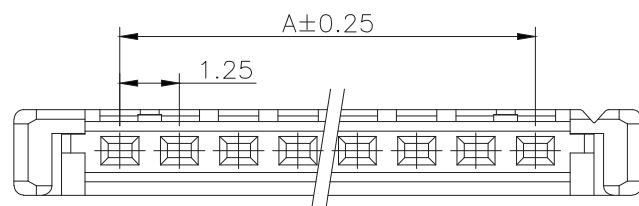
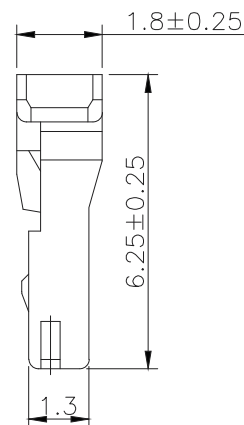


Note:

1. Material: P.B.T. UL 94V-0

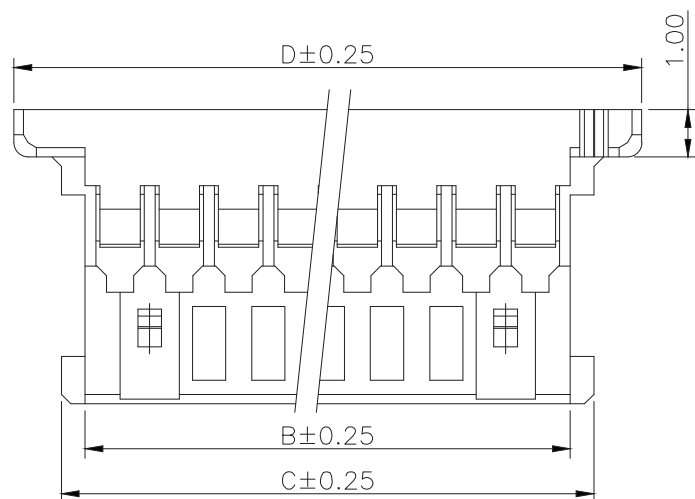

Dimensional & Ordering Information:

Circuits	Dimension mm			
	A	B	C	D
02	1.25	2.72	3.72	5.72
03	2.50	3.97	4.97	6.97
04	3.75	5.22	6.22	8.22
05	5.00	6.47	7.47	9.47
06	6.25	7.72	8.72	10.72
07	7.50	8.97	9.97	11.97
08	8.75	10.22	11.22	13.22
09	10.00	11.47	12.47	14.47
10	11.25	12.72	13.72	15.72
11	12.50	13.97	14.97	16.97
12	13.75	15.22	16.22	18.22
13	15.00	16.47	17.47	19.47
14	16.25	17.72	18.72	20.72
15	17.50	18.97	19.97	21.97
16	18.75	20.22	21.22	23.22
17	20.00	21.47	22.47	24.47
18	21.25	22.72	23.72	25.72
19	22.50	23.97	24.97	26.97
20	23.75	25.22	26.22	28.22
30	36.25	37.72	38.72	40.72

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

PNM-H-xx-LF
SERIES | LEADFREE
02~30 WAY
HOUSING

DESCRIPTION: