


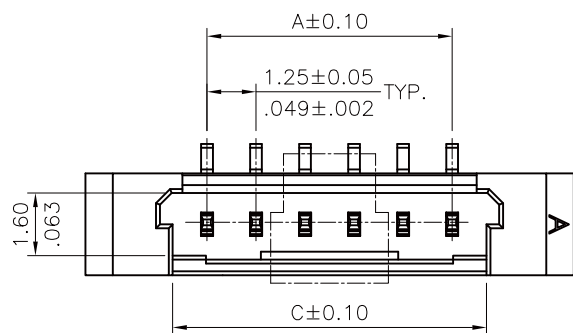
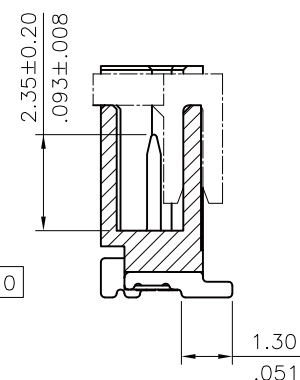


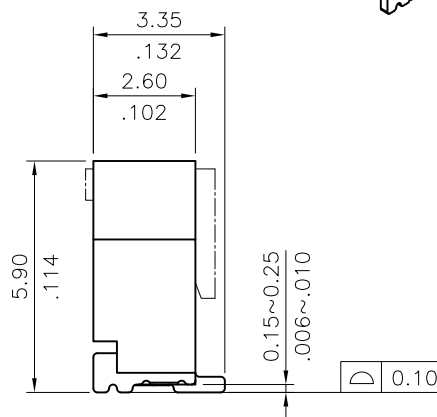


NOTE:

Material :

- \* Base : High Temperature plastic UL 94V-0
- \* Contact : Copper alloy
- \* Fixed tab : Matte Tin plated over Nickel

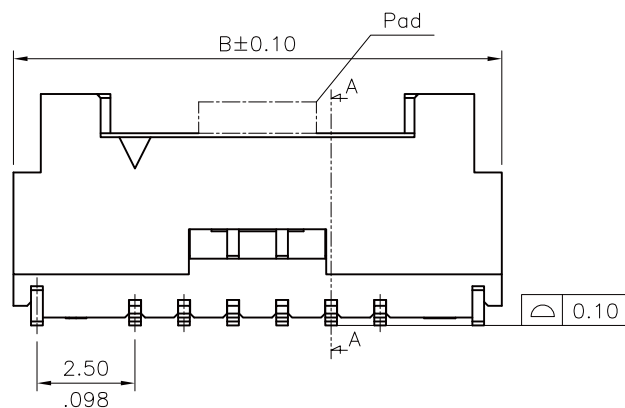

SEC. A-A

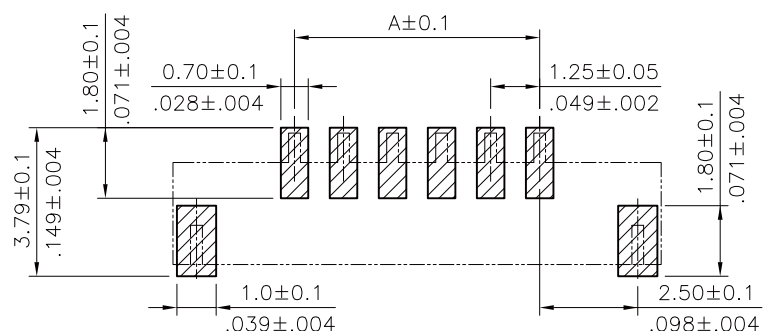

Recommended P.C. Board Layout

DIM. A = 1.25 x NO. OF SPACES

DIM. B = DIM. A + 6.20

DIM. C = DIM. A + 1.75

\* AVAILABLE IN 2 THROUGH 20

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±

PPOJECTION


照片框

ORDER INFORMATION

PNM-VXCR-xx-LF

SERIES  
LEADFREE  
02~20 WAY  
REEL  
CAP  
NON POST  
180°SMT



DESCRIPTION:

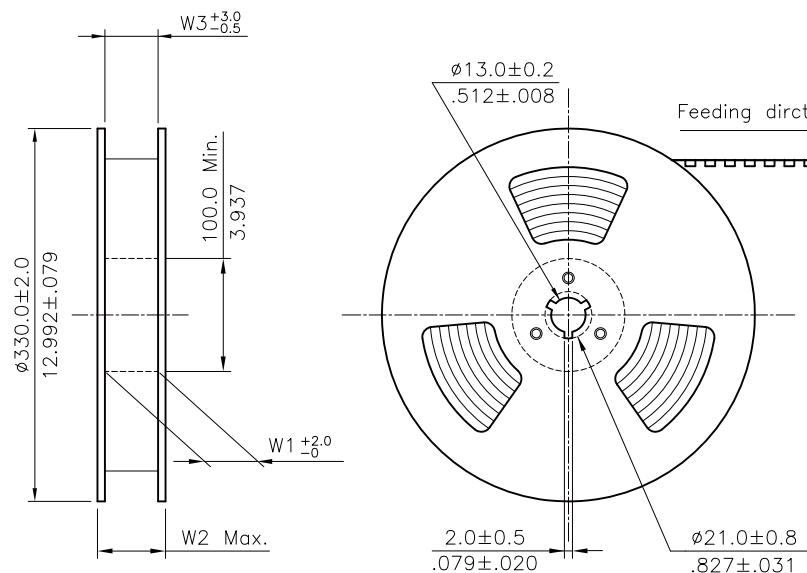


NOTE :

- \* Reel Material : HIPS
- \* Carrier Material : Black, Polystyrene alloy
- \* Cover Tape Material : Polyester
- \* Cover Tape Peel Strength : 0.1N – 1.3N
- \* Carrier camber is within 1mm in 100mm
- \* All dimensions meet EIA-481-2 & EIA-481-3 requirements.
- \* Quantity : 850 PCS/Reel

| Circuits | Dimension   |              |             |             |             | Packing<br>(Reel/Carton) |
|----------|-------------|--------------|-------------|-------------|-------------|--------------------------|
|          | E           | F            | W1          | W2          | W3          |                          |
| 2-8      | 24.0(.945)  | —            | 24.5(.965)  | 30.5(1.201) | 24.5(.965)  | 9                        |
| 9-12     | 32.0(1.260) | 28.40(1.118) | 32.5(1.280) | 38.5(1.516) | 32.5(1.280) | 7                        |
| 13-20    | 44.0(1.732) | 40.40(1.591) | 44.5(1.752) | 50.5(1.988) | 44.5(1.752) | 5                        |

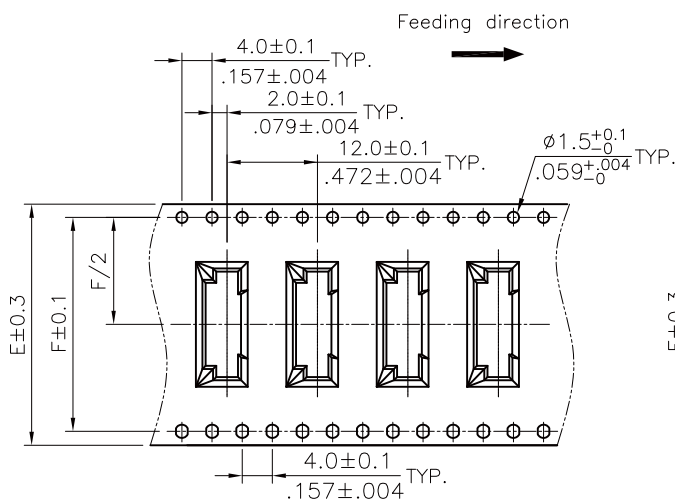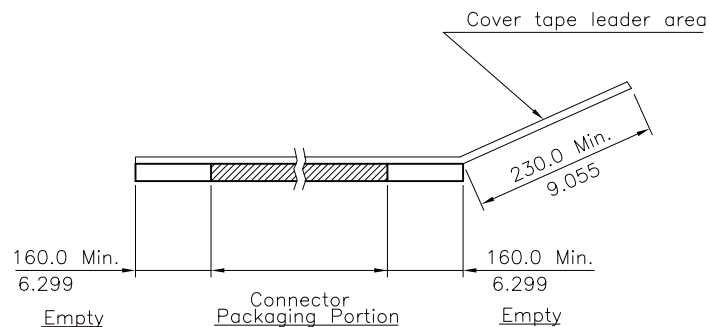

WIDTH : 32.44 mm Carrier

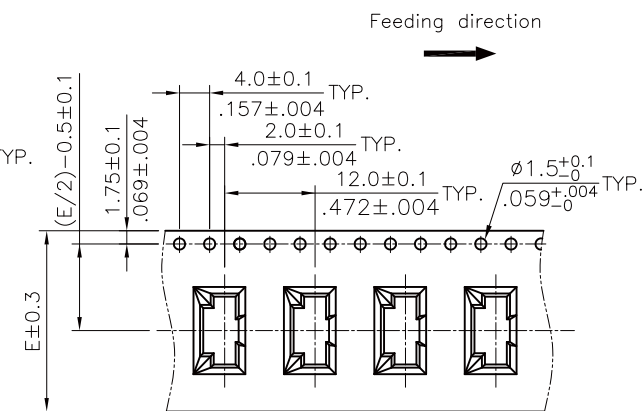

WIDTH : 24 mm Carrier

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$   
X,  $\pm 0.30$   
XX,  $\pm 0.20$   
XXX,  $\pm 0.10$   
ANG  $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PNM-VXCR-xx-LF

SERIES LEADFREE  
02~20 WAY  
REEL  
CAP  
NON POST  
180°SMT

DESCRIPTION: