

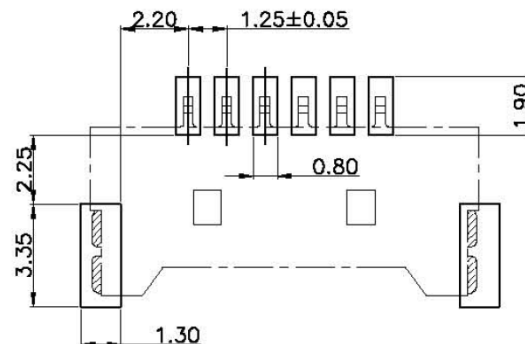
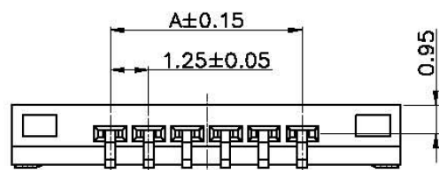
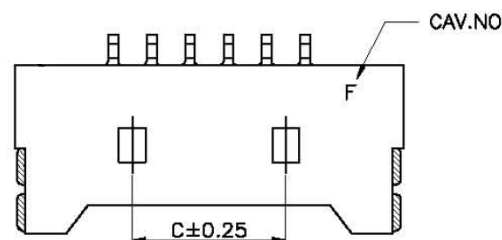
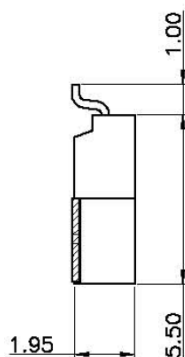


Mating Condition (REF.)

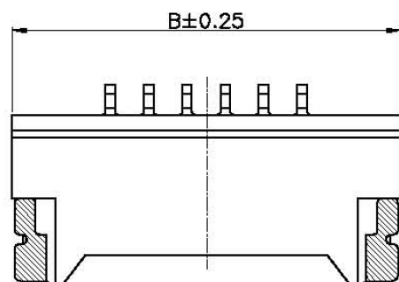

Pin	DIM. (mm)			Pin	DIM. (mm)		
	A	B	C		A	B	C
2	1.25	7.65		13	15.00	21.40	13.75
3	2.50	8.90		14	16.25	22.65	15.00
4	3.75	10.15	2.50	15	17.50	23.90	16.25
5	5.00	11.40	3.75	16	18.75	25.15	17.50
6	6.25	12.65	5.00	18	21.25	27.65	20.00
7	7.50	13.90	6.25	20	23.75	30.15	22.50
8	8.75	15.15	7.50	22	26.25	32.65	22.50
9	10.00	16.40	8.75	24	28.75	35.15	22.50
10	11.25	17.65	10.00	26	31.25	37.65	22.50
11	12.50	18.90	11.25	28	33.75	40.15	22.50
12	13.75	20.15	12.50	30	36.25	42.65	22.50

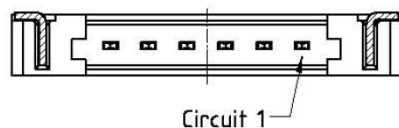

NOTES:

- MATERIAL:**
INSULATION: LCP UL 94V-0 (CREAM)
CONTACT: PHOSPHOR BRONZE
SOLDER TAB: PHOSPHOR BRONZE / 60u" MATTE TIN PLATED OVER NICKEL
- FINISH:** 60u" MATTE TIN PLATED OVER NICKEL
- PACKING:** 2000 PCS/TAPE REEL

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.08

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PNM-WX-xx-LF
SERIES | LEADFREE
02-30WAY
NON POST
90°SMT

DESCRIPTION: