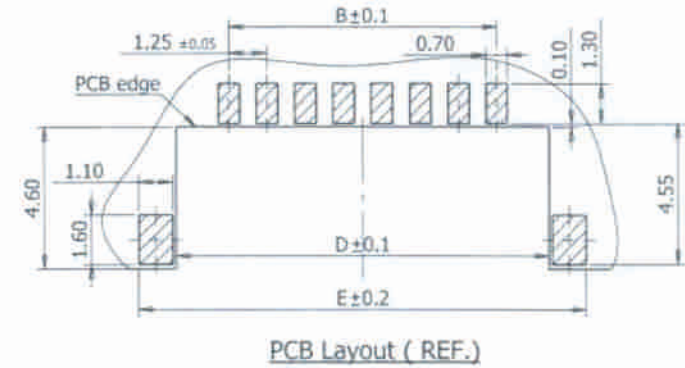
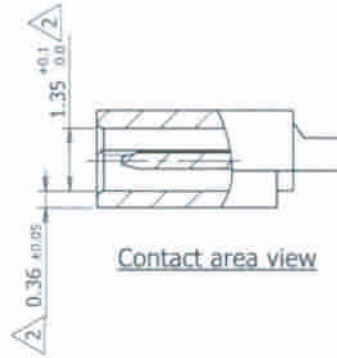
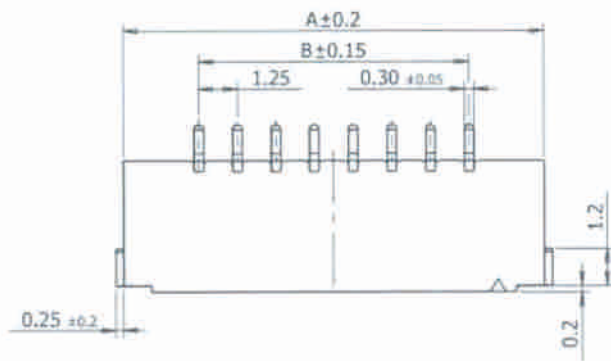


Note:
1. Coplanarity of SMT terminal
is 0.1mm maximum.

Table 1

Pos.	Part name	A	B	C	D	E
2	PNM-WXF-02	6.10	1.25	3.18	4.70	7.10
3	PNM-WXF-03	7.35	2.50	4.43	5.95	8.35
4	PNM-WXF-04	8.60	3.75	5.68	7.20	9.60
5	PNM-WXF-05	9.85	5.00	6.93	8.45	10.85
6	PNM-WXF-06	11.10	6.25	8.18	9.70	12.10
8	PNM-WXF-08	13.60	8.75	10.68	12.20	14.60
10	PNM-WXF-10	16.10	11.25	13.18	14.70	17.10
15	PNM-WXF-15	22.35	17.50	19.43	20.95	23.35

3	Hold down	2	Copper alloy	Tin	
2	Terminal	Table 1	Copper alloy	Gold flash	
1	Insulator	1	LCP	Nature	
No.	Description	Quantity	Material	Finish	Note

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PNM-WXF-xx-LF
SERIES | | LEADFREE
| | 02~15WAY
| OFFSET
| NON POST
| 90°SMT

DESCRIPTION: