
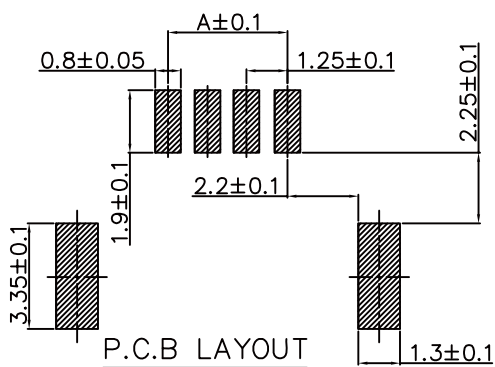


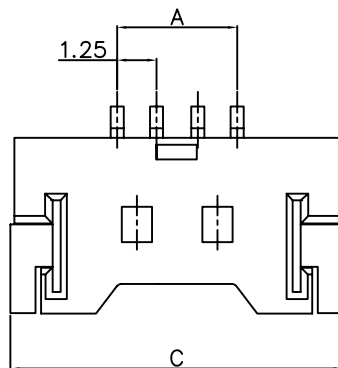


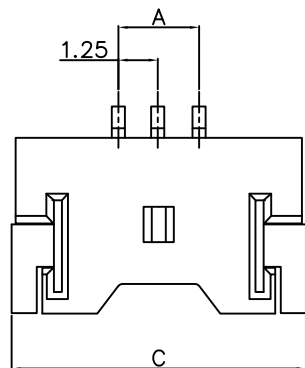

Specifications:

Electrical

Rated Voltage: 125V AC,DC

Rated Current: 1A

Withstand Voltage: 500V AC/minute

Contact Resistance: 20mΩ (MAX.)


Insulation Resistance: 100mΩ (MIN.)

Temperature Range: -25°C~+85°C

Material and finish:

Circuits: 02-30

Material: High-Temperature Plastic,
UL94V-0,NATURE.

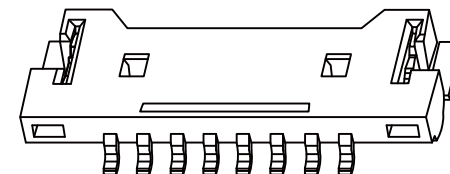

Dimensional & Ordering Information:

Cir- cuit	Part No	Dimension mm			REEL/ PCS
		A	B	C	
02	PNM-WXG-02	1.25	7.65	7.85	2,000
03	PNM-WXG-03	2.50	8.90	9.10	2,000
04	PNM-WXG-04	3.75	10.15	10.35	2,000
05	PNM-WXG-05	5.00	11.40	11.60	2,000
06	PNM-WXG-06	6.25	12.65	12.85	2,000
07	PNM-WXG-07	7.50	13.90	14.10	2,000
08	PNM-WXG-08	8.75	15.15	15.35	2,000
09	PNM-WXG-09	10.00	16.40	16.60	2,000
10	PNM-WXG-10	11.25	17.65	17.85	2,000
11	PNM-WXG-11	12.50	18.90	19.10	2,000
12	PNM-WXG-12	13.75	20.15	20.35	2,000
13	PNM-WXG-13	15.00	21.40	21.60	2,000
14	PNM-WXG-14	16.25	22.65	22.85	2,000
15	PNM-WXG-15	17.50	23.90	24.10	2,000
16	PNM-WXG-16	18.75	25.15	25.35	2,000
17	PNM-WXG-17	20.00	26.40	26.60	2,000
18	PNM-WXG-18	21.25	27.65	27.85	2,000
19	PNM-WXG-19	22.50	28.90	29.10	2,000
20	PNM-WXG-20	23.75	30.15	30.35	2,000
30	PNM-WXG-30	36.25	42.65	42.85	2,000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±





ORDER INFORMATION

PNM-WXGR-xx-LF

SERIES
LEADFREE
02-30WAY
REEL
GOLD/PLATE
NON POST
90°SMT

DESCRIPTION:

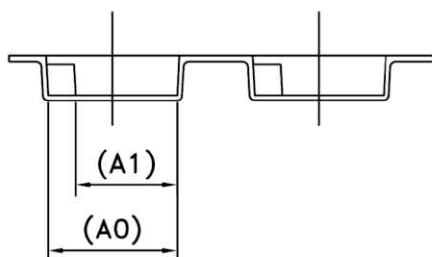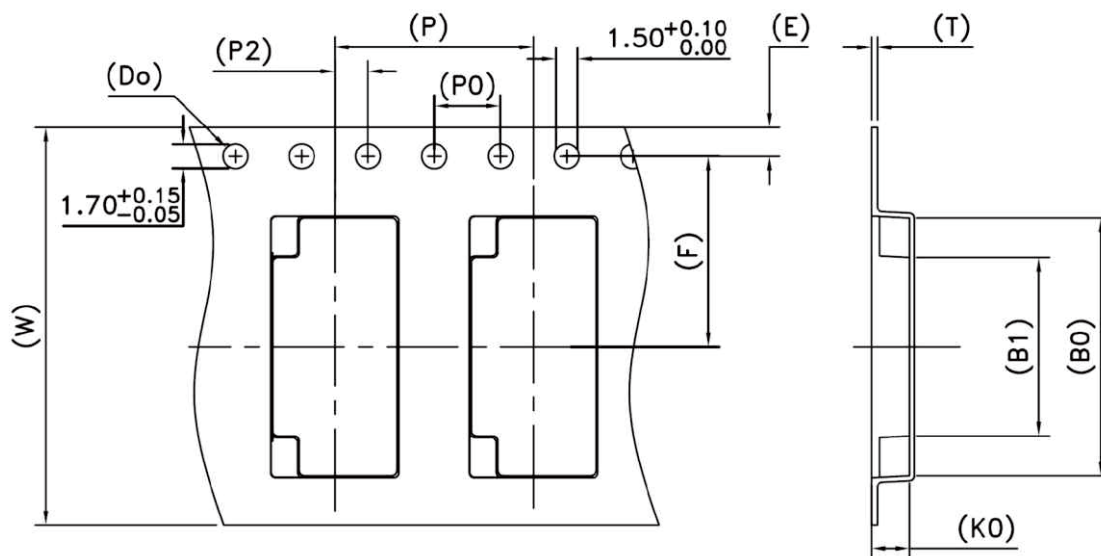

P2值以A0中心為準

NOTE:

- 1.MATERIAL: BLACK PS
- 2.CARRIER CAMBER IS WITHIN 1mm IN 100mm
- 3.PACKING LENGTH PER 13" REEL: 24.5 METERS
- 4.COMPONENT LOAD PER 13" REEL: 2000 PCS
- 5.10 sprocket hole pitch cumulative tolerance $\pm 0.2\text{MM}$

W	E	F	P0	P2	D0
24.0 ± 0.3	1.75 ± 0.1	11.5 ± 0.1	4.0 ± 0.1	2.0 ± 0.1	$\phi 1.5^{+0.1}_{-0.0}$
T	A0	A1	B0	B1	K0
0.35 ± 0.05	0.75 ± 0.15	5.9 ± 0.10	15.75 ± 0.15	10.7 ± 0.15	2.3 ± 0.15
P					
12.0 ± 0.10					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

PNM-WXGR-xx-LF
SERIES | | | | LEADFREE
02-30WAY
REEL
GOLD/PLATE
NON POST
90°SMT

DESCRIPTION: