


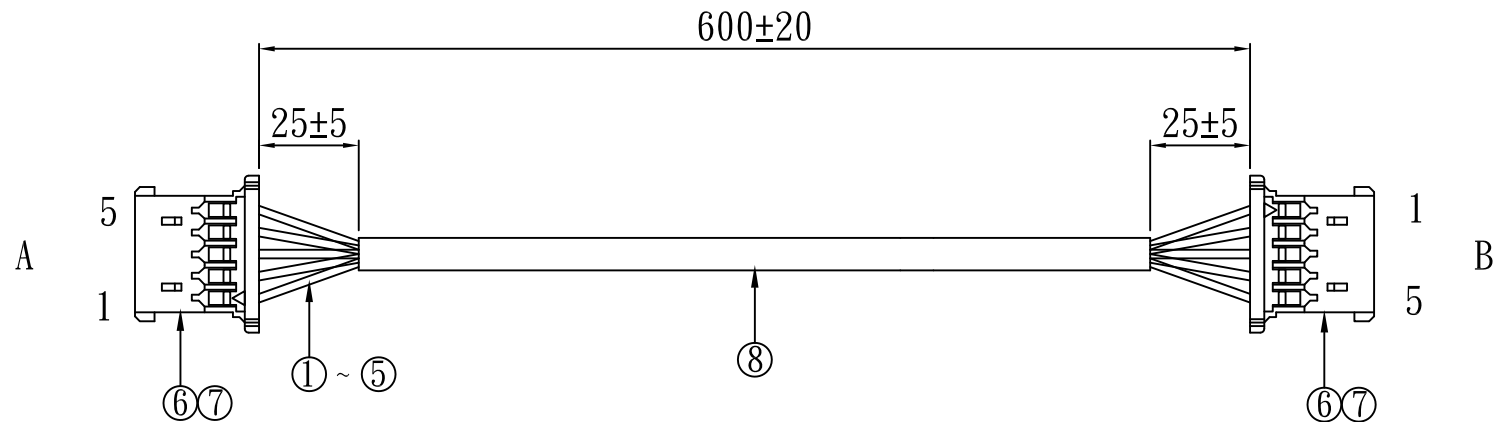

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

WIRING CHART

A	COLOR	B
1	RED	1
2	BLACK	2
3	BROWN	3
4	ORANGE	4
5	GREEN	5

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL1571 #28 OD:0.8 RED	1PCS	E108485
2	WIRE:	UL1571 #28 OD:0.8 BLACK	1PCS	E108485
3	WIRE:	UL1571 #28 OD:0.8 BROWN	1PCS	E108485
4	WIRE:	UL1571 #28 OD:0.8 ORANGE	1PCS	E108485
5	WIRE:	UL1571 #28 OD:0.8 GREEN	1PCS	E108485
6	HOUSING:	PNM-H-05	2PCS	E186792
7	TERMINAL:	PNM-T-28	10PCS	E186792
8	H.S TUBE:	3.5Φ*550mm BLACK F32	1PCS	E203950
9				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PNMX2-050528HT1-F60C-LF

SERIES

LEADFREE

600mm

FEMALE TO FEMALE

HEAT SHRINK TUBING

28 AWG

05 TO 05 WAY

DESCRIPTION: CABLE ASS"Y