


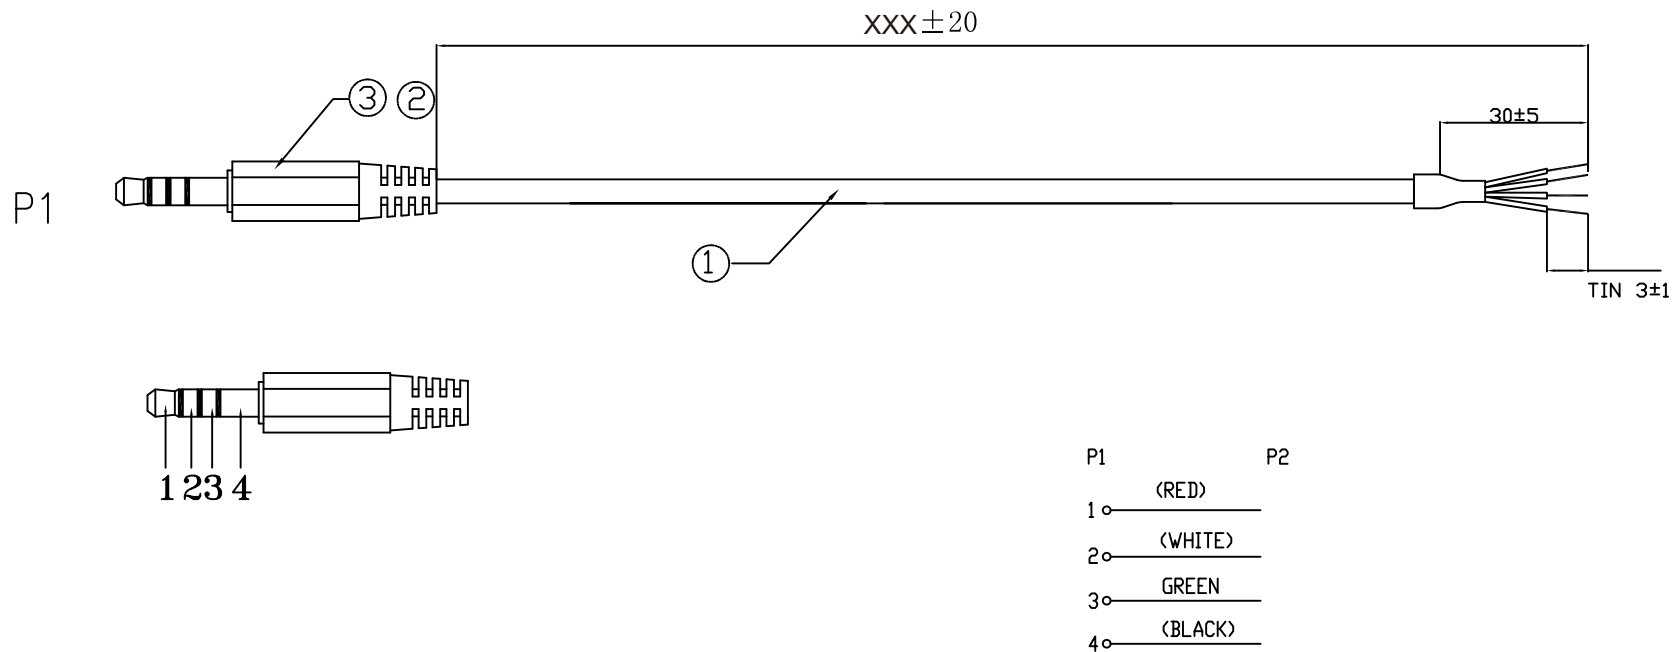

ELECTRICAL PROPERTIES

1. 100% OPEN SHORT MIS-WIRE TEST
2. CONTACT RESISTANCE 5 OHM MAX
3. INSULATION RESISTANCE 20 MEGA OHM MIN
4. HIPOT TEST DC 300V 10MS

③	45P PVC COLOR:BLACK	12	G
②	STEREO PLUG Ø3.5, 4 POLE, INSULATOR:BLACK.	1	PCS
①	UL2725 #28/1P+#28/2C OD:3.5 BLACK	1	PCS
NO.	DESCRIPTION	Q' TY	UNIT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PNX1-040028-Mxxx-LF

SERIES

04 WAY

LEADFREE
20C:20CM
50C:50CM
1M6:1.6MTR
MALE
28 AWG

DESCRIPTION: ST3.5/OPEN L=200mm