


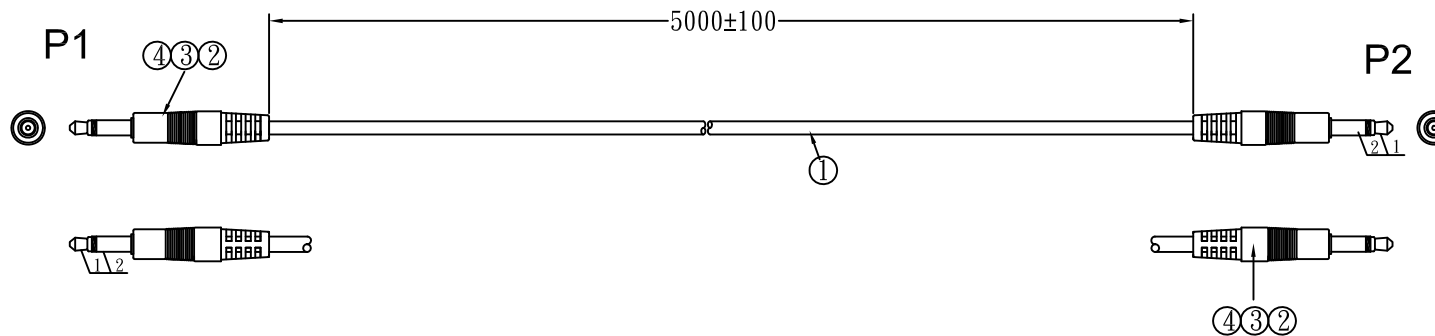


Finished 100% to do the test

Test conditions are as follows:

1. Insulation resistance: $10M\Omega$
2. Contact impedance: 5Ω
3. High voltage test: 300V

PIN ASSIGNMENT:

P1	COLOR	P2
1	Yellow	1
2	Spiral	2

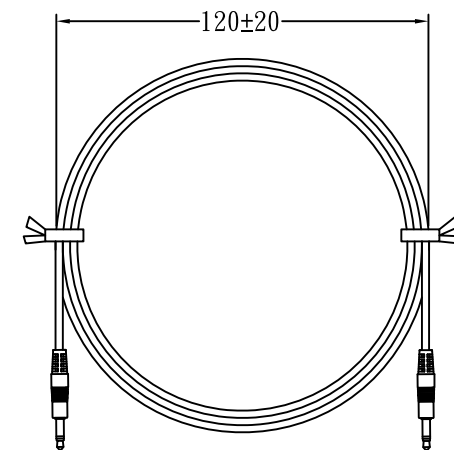

Packing method:

Single PCS with a tie and then a bundle of paper Box, packing quantity.

NOTES: UNLESS OTHERWISE SPECIFIED

ITEM	MATERIAL	QUANTITY
1	NO-UL 26#1C(YELLOW)+S(24#) OD3.0MM COLOR:BLACK	1PCS
2	Ø3.5Bull head Black rubber core shell plating	1PCS
3	MOLDING:45P PVC Rubber color:BLACK	10g
4	Black heat shrinkable sleeve:Ø1.0*10MM T=0.2MM	2PCS
5		

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PNX2-02022426-M5M-LF

SERIES

LEADFREE

5000mm

MALE TO MALE

24/26 AWG

2PIN TO 2PIN

DESCRIPTION: