

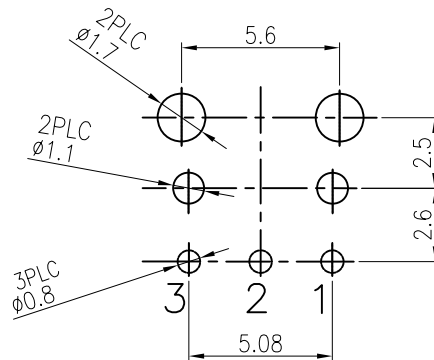
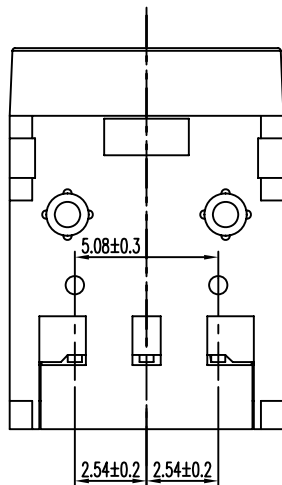
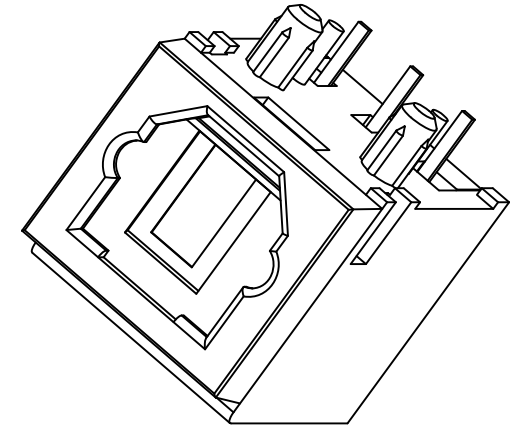
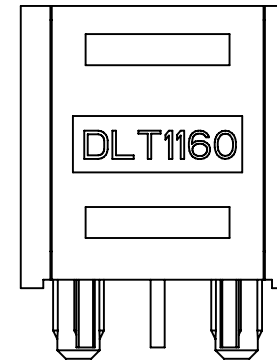
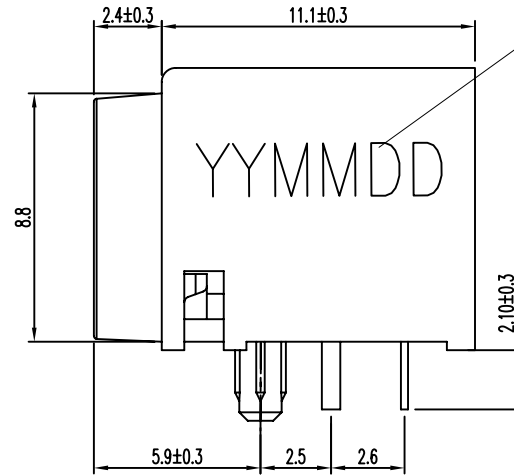


DATE CODE
YY:YEAR
MM:MONTH
DD:DATE

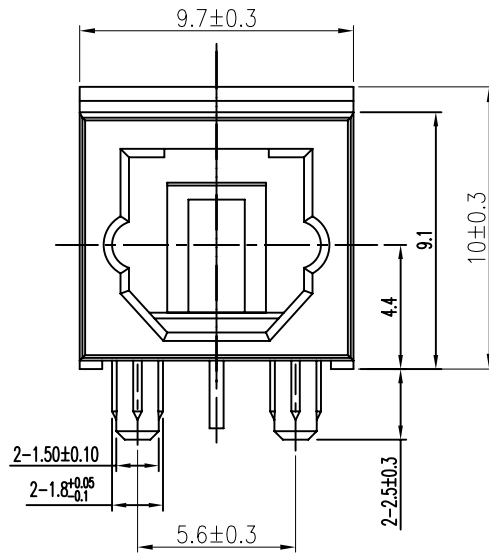

Recommended PCB Layout
Bottom view

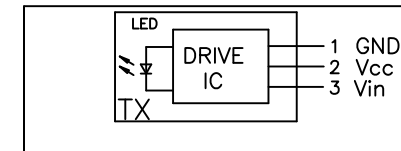

⑥	DRIVE IC(TX)	1	25Mbps	
⑤	PIN	1	SPCC	TIN 60u" MIN, NI PLATED OVERALL,30u" MIN.
④	SPRING	1	SUS 301	
③	GATE	1	PA9T+33%GF	UL94V-0 Black
②	FRAME	1	PA9T+33%GF	UL94V-0 Black
①	HOUSING	1	PA9T+33%GF	UL94V-0 Black
ITEM	DESCRIPTIONs	Q'TY	MATERIAL	FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
Cable CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ± 0.05

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

POF-JRPS-T03-LF

SERIES

TX 3PIN

LEADFREE


SHUNT DOOR

POST


DIP 90°

JACK

DESCRIPTION: OPTO JACK

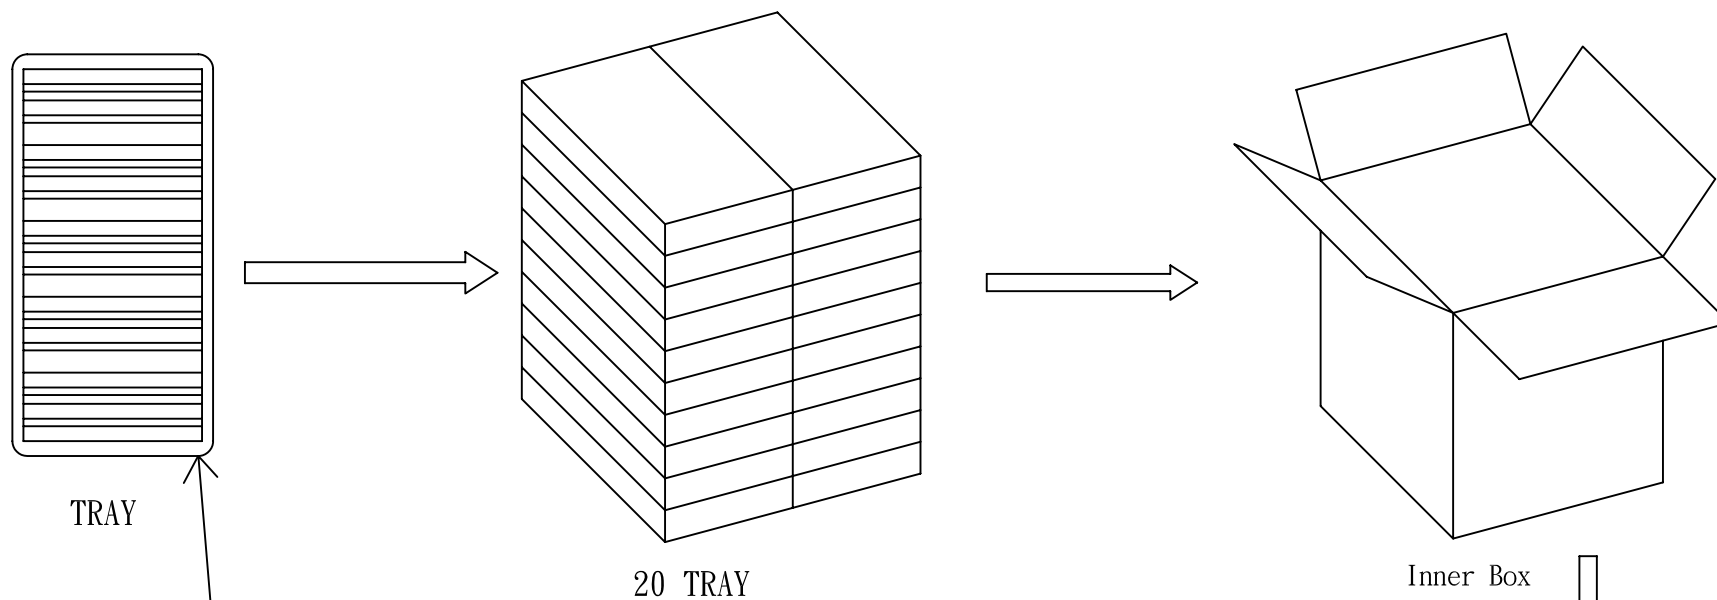

Item	QTY	Total	Size(long*width*high)
Tray	1	100PCS	135*270*28mm
Inner Box	20Tray/Inner Box	2000PCS	290*290*185mm
Outer Box	2Inner Box/Outer Box	4000PCS	600*310*218mm

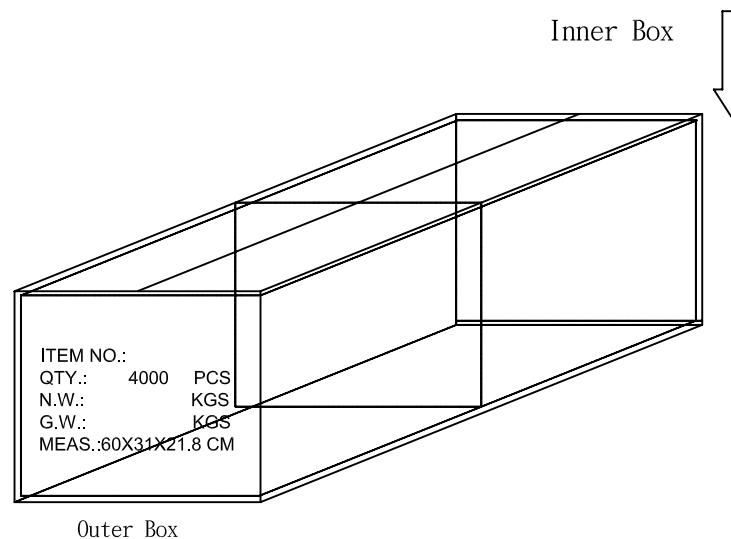

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ± 0.05

ANG $\pm 1^\circ$

PPOJECTION

照片框

ORDER INFORMATION

POF-JRPS-T03-LF

SERIES

TX 3PIN

LEADFREE

SHUNT DOOR

POST

DIP 90°

JACK

DESCRIPTION: TARY PACKAGE