




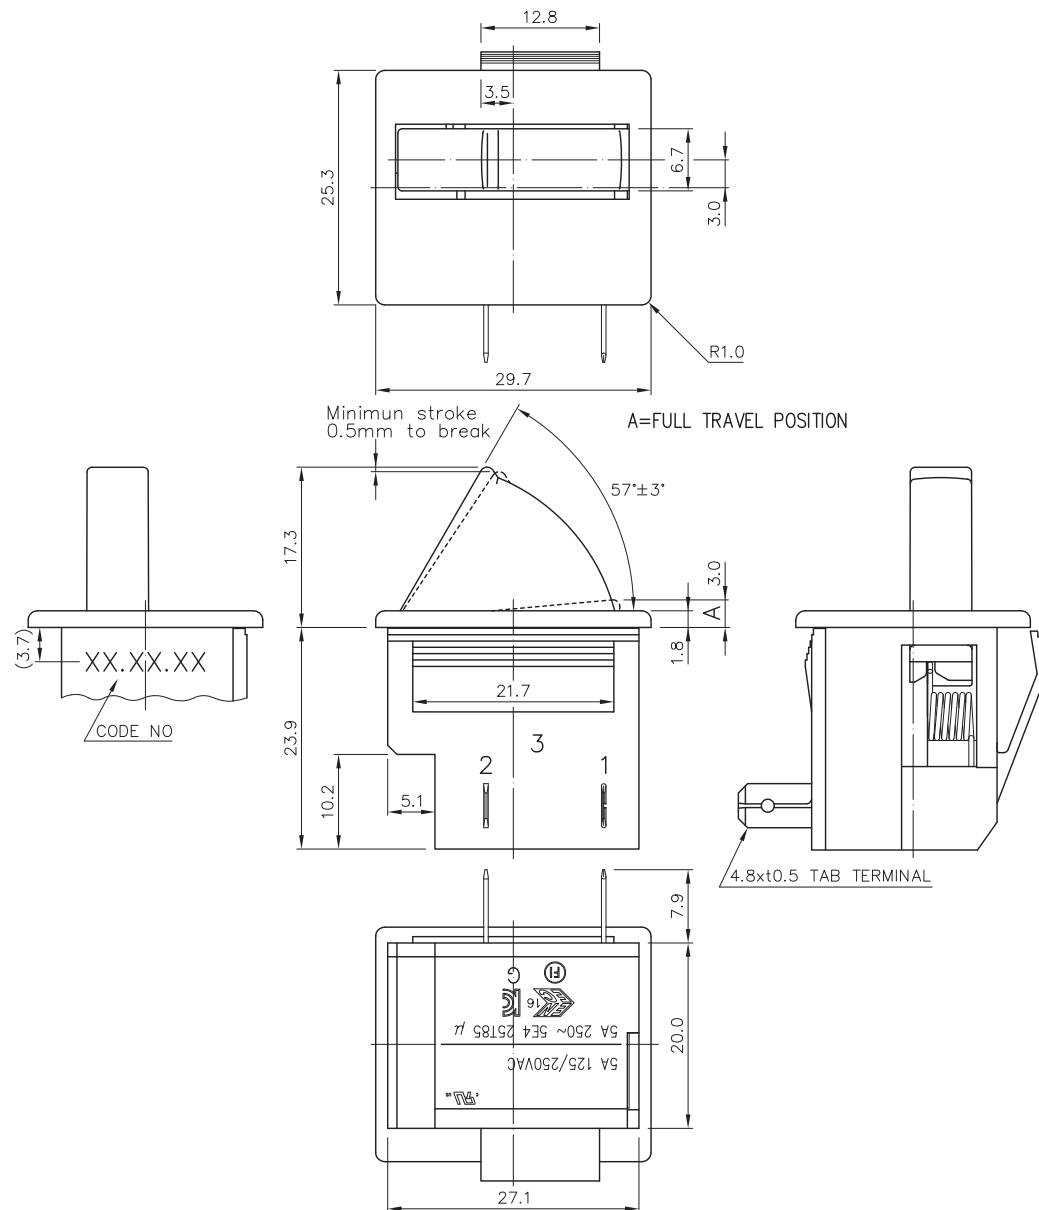

RATING : 5A 125/250VAC (UL,C-UL)  
 5A 250V~ 5E4 25T85 u(ENEC)  
 INSULATION RESISTANCE: DC 500V 100MΩ OR MORE  
 WITHSTAND VOLTAGE : AC 1000V 1 Min  
 CONTACT RESISTANCE : DC 2-4V 1A 100mΩ OR LESS  
 HOUSE TEST :  
 AFTER 200,000CYS AT 150WATTS SIMULATED LOAD 250VAC  
 ON TERMINAL 1-2 SWITCH STILL FUNCTION CORRECTLY.  
 OPERATION FORCE : 145±50gf  
 COLOR : KNOB- WHITE(TH-1046)  
 : BODY- WHITE(TH-1046)  
 UL No : E68037 ENEC16/FI No : 19/10072  
 C-UL No : E68037 CB NO : FI-42596



CIRCUIT

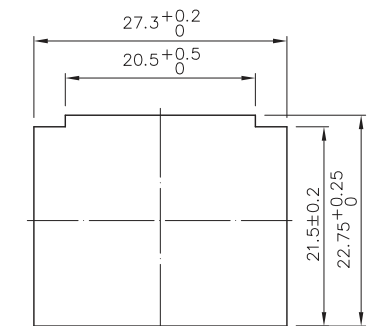

SUITABLE PANEL CUTOUT  
 FOR 1.0 TO 2.5 PANEL THICKNESS  
 MOUNTING HOLE

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PSW2529-RPA-0302-LF

SERIES

LEADFREE

03P02C

PANEL FRONT

DIP 90°

DESCRIPTION: