
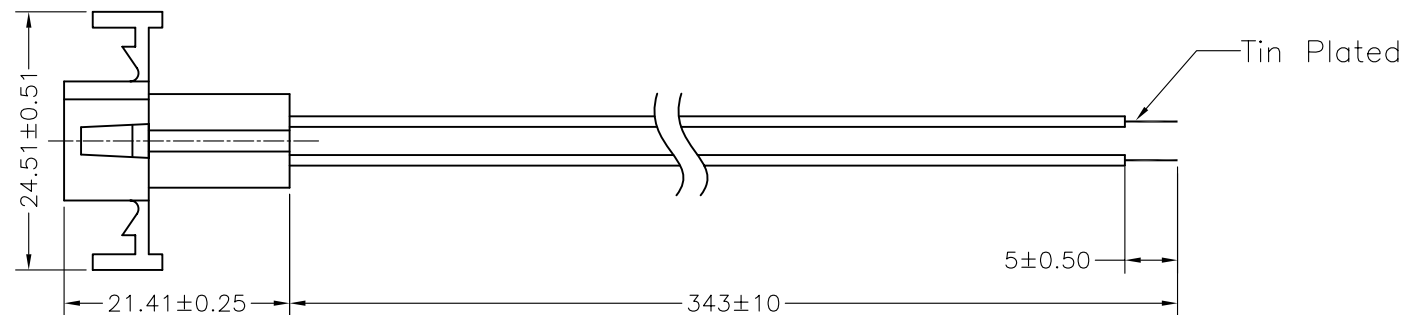


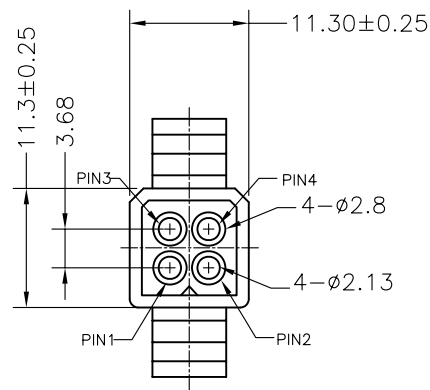

NOTES:

1.Materials:

1.1.Insulator:NYLON,UL 94V-2.

1.2.Wire:UL1015 22AWG.

1.3.Contact:Brass Tin Plated.

2.Explained For Pins Location:

2.1.PIN Locations 1&2.Colour Brown.

Terminated With NYLON Insulated.

Terminals:4.75mm*0.81mm.

2.2.PIN Locations 3&4.Colour Yellow.

Terminated With NYLON Insulated.

Terminals:4.75mm*0.81mm.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PSX1-B020018-ME13N5-LF

SERIES

04 WAY

18 AWG

EAR

MALE

343mm

LEADFREE

DESCRIPTION: Power Connecor Assy(2)