


MAXIMUM ELECTRIC CURRENT

A. W. G	6
MAX AMP	95

NOTE:

- 1. DIN 46230
- 2. BRAZED SEAM
- 3. MATERIAL THICKNESS: t
TOLERANCE: 1. 0~1. 99±0. 05

WIRE RANGE AWG/mm²	產品編號 ITEM NO.	B ±0. 30	F MIN	L ±1. 00	E ±0. 60	D ±0. 30	d1 MIN	H ±0. 20	t
6 A. W. G. 16 mm²	PT-X16-06	5. 50	13. 00	26. 00	10. 00	8. 50	5. 80	2. 60	1. 20

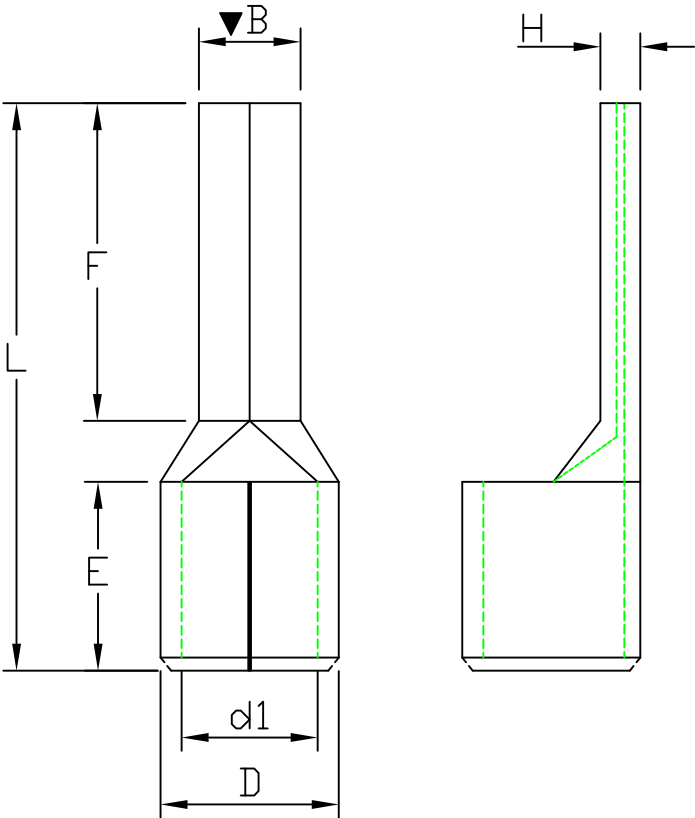

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PT-X16-06-LF
SERIES T LEADFREE
6 AWG
16.0mm LONG
NON PVT

DESCRIPTION: TIN PLATING 2.5 μ min