


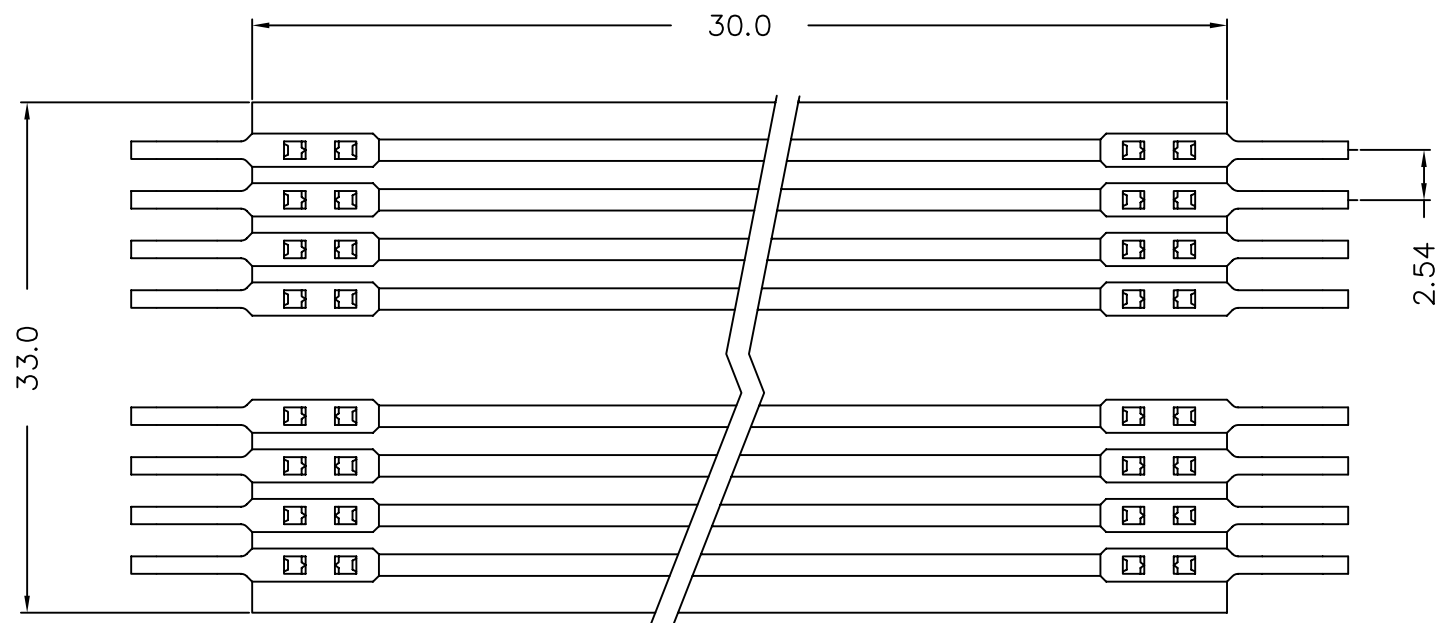

Characteristics

Specification	
Material	Phosphor Bronze
Contact Resistance	5mΩ
Contact Resistance after Climatic Tests	6mΩ
Withstanding Voltage	1100 VRMS
Capacitance between two Contacts	4 pF max.
Direct current rating per contact	3A permanent
Alternating current rating per contact	5A permanent
Operating Temp Range	-55°C to + 105°C
Contact Resistance to stripping from circuit	>15N Min perpendicular to the tracks (breaking-up of the conductor) >50N Min parallel to the tracks (breaking-up of the conductor)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±



照片框

ORDER INFORMATION

PVFX2-1212-M3C-LF

SERIES

LEADFREE

30mm

MALE TO MALE

12 TO 12 WAY

DESCRIPTION: