





SPECIFICATIONS

MATERIAL:

1. Insulator : nylon polymer UL 94-V0
2. Color : Black
3. Contacts : Sq 0.64mm Gold/Tin Sletive Plated

ELECTRICAL:

1. Current Rating : 1.5 AMP
2. Operation Temperature : -40°C to + 105°C
3. Contact Resistance : 10 Milliohms MAX
4. Insulation Resistance : 1000 Milliohms MIN
5. Dielectric Withstanding Voltage : 500V AC

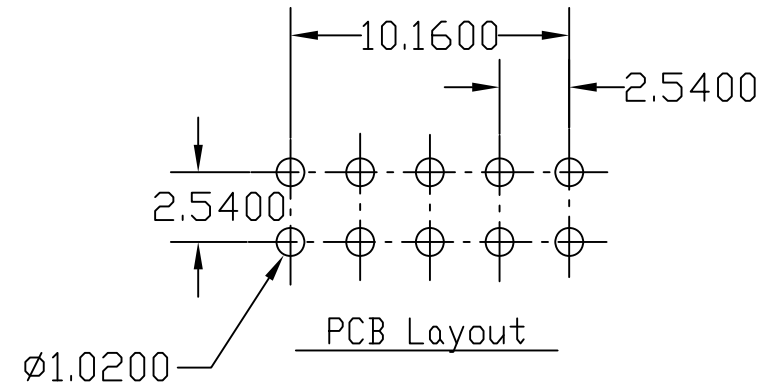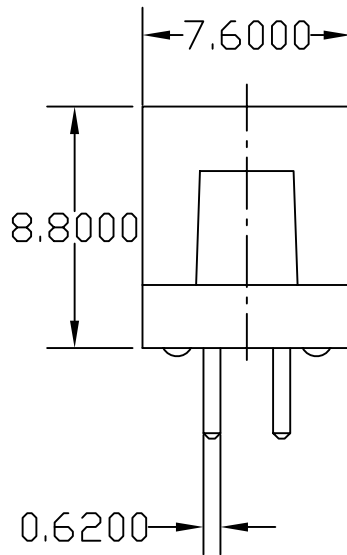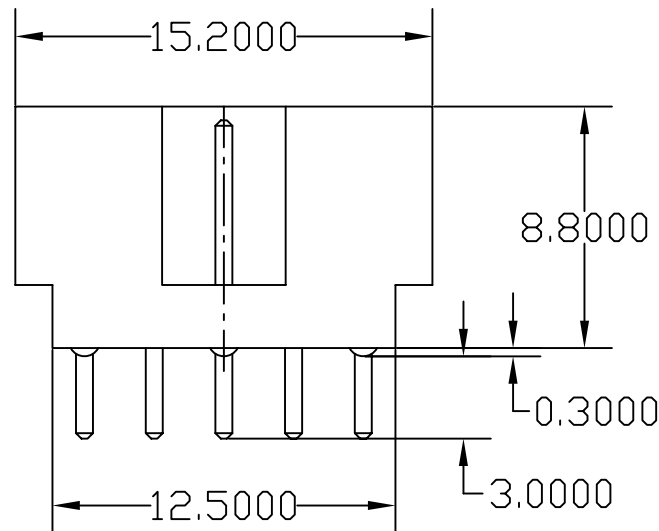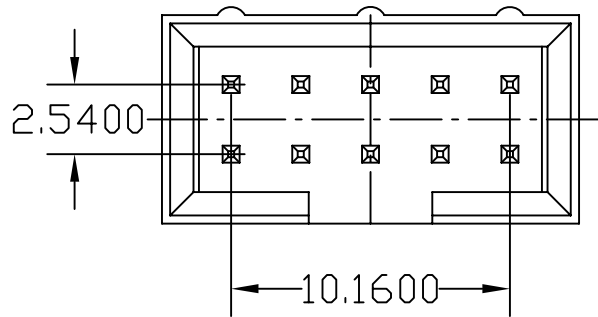

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ±
ANG ±

PPOJECTION

ORDER INFORMATION

PVK-DB-2X05-LF

SERIES LEADFREE

10 WAY

BOX

DIP 180°

DESCRIPTION: Box Header